

User Manual

PNVR204 4CH,

PNVR208 8CH

Full HD NVR

Copyright

This manual without the manufacturer's approved copy and reprinted partially or in full, or translated into another language is prohibited.

Limitation of Liability

This product is designed to prevent fire and theft is not the main means. We shall not be liable for accidents or damage by using this product can result in liability for accidents or damage

In order to improve the performance of the product without prior notice to the product may be a firmware upgrade.

Content

1. Overview	8
1.1. Safety instruction	8
1.2. Key Features	8
1.3. What's included	9
1.4. Front Panel	10
1.5. Rear Panel	10
1.6. Remote Control At a Glance	11
1.7. Change the remote control ID	12
2. Installation	13
2.1. HDD Replacement	13
2.2. Basic Layout	14
2.3. Precautions	14
2.4. Connecting to an external device	14
2.4.1. Connecting to the monitor	14
2.4.2. Power connection	14
2.4.3. NVR power connection	14
2.4.4. Poe Switching hub power connection	14
2.4.5. Connecting the camera	16
2.4.6. If the distance between the NVR and IP camera is more than 100m	16
2.4.7. Alarm I/O Connection	17
2.4.8. Communication Port	18
2.4.9. USB Device	19
2.4.10. Network Connection	20
2.4.11. Pconnection from a remote network	20
3. Monitoring	22
3.1. Live Screen at a Glance	23
3.1.1. Video Window	23
3.1.2. Status bar	23
3.1.3. Timeline	24
3.1.4. Quick Menu	25
3.1.5. Using the status bar in the live mode	25
3.1.6. Digital Zooming	28
4. System Setting	31
4.1. To move to the System Setup menu	31
4.2. Camera Setting	31
4.2.1. Camera Title	31
4.2.2. Camera Setup	32

4.2.3.	Direct Configuration.....	32
4.2.4.	Covert Setup	33
4.2.5.	Motion Sensor.....	33
4.2.6.	Motion area Setup	34
4.2.7.	PTZ Settings.....	34
4.3.	Display Setting.....	35
4.3.1.	OSD	35
4.3.2.	Monitor	36
4.3.3.	Sequence.....	36
4.3.4.	To add a sequence	36
4.3.5.	To edit a sequence	37
4.4.	Audio Setup	37
4.4.1.	Audio.....	37
4.4.2.	Buzzer output.....	38
4.5.	User Setting	39
4.5.1.	Management.....	39
4.5.2.	To add a user account.....	39
4.5.3.	To edit the user account information	39
4.5.4.	Group Authority.....	40
4.6.	Network Setup	41
4.6.1.	IP Setup	41
4.6.2.	DDNS	42
4.6.3.	Email	42
4.6.4.	Network Status	43
4.6.5.	Network Map	43
4.6.6.	Detail Status.....	44
4.6.7.	Security	44
4.6.8.	ENCRYPTION	44
4.6.9.	IP FILTER.....	44
4.7.	System Setting.....	45
4.7.1.	Date/Time	45
4.7.2.	System Management	45
4.7.3.	To perform the upgrade	46
4.7.4.	System information.....	47
4.7.5.	Control Device.....	47
4.7.6.	Security	48
4.8.	Storage	49

4.8.1.	Disk Information	49
4.8.2.	Disk Operations.....	49
4.8.3.	S.M.A.R.T settings	50
4.9.	Event Setup	51
4.9.1.	Alarm Out.....	51
4.9.2.	ON/OFF Schedule.....	51
4.9.3.	Event Notification	52
4.9.4.	Buzzer output.....	52
4.9.5.	Display.....	52
4.9.6.	Email	53
4.9.7.	FTP	53
4.9.8.	Alarm Sensor	54
4.9.9.	Motion Sensor.....	55
4.9.10.	Video Loss	55
4.9.11.	System Event	56
4.9.12.	Disk	56
4.9.13.	Record	56
4.9.14.	System	57
4.9.15.	Network.....	57
5.	Record Setting.....	58
5.1.	To start the Record Setup menu	58
5.2.	Record Setup	58
5.2.1.	operation Mode	58
5.2.2.	Auto configuration.....	58
5.2.3.	Manual configuration	59
5.2.4.	Continuous Recording.....	59
5.2.5.	Size/FPS/Quality Setting	60
5.2.6.	Schedule Setting	60
5.2.7.	Motion Recording	61
5.2.8.	Alarm Recording	61
5.2.9.	Panic Recording	62
5.2.10.	Network Streaming.....	62
6.	Search	63
6.1.	To move to the Search menu while in monitoring.....	63
6.2.	To move to the Search menu while in playback mode	63
6.3.	Search Settings.....	64
6.3.1.	TIME Search	64

6.3.2.	Thumbnail Search	65
6.3.3.	Event Search	65
7.	Playback.....	67
7.1.	If you want to play.....	67
7.2.	Playback screen configuration	67
7.2.1.	Playback channel selection menu	68
7.2.2.	Using the play bar	68
7.3.	Bookmarking	68
8.	Archiving	70
8.1.	Using the archive menu during playback	70
8.2.	Using the archive menu during monitoring	70
8.3.	Archive	70
8.3.1.	Reserved data management	71
8.3.2.	Playing the archived data.....	71
8.3.3.	Archive devices Setup	72
9.	Web Viewer	73
9.1.	What is the web viewer?.....	73
9.2.	System Requirements	73
9.3.	connection.....	73
9.3.1.	To connect to the nvR from inside.....	73
9.3.2.	To connect to the nvR from outside	73
9.4.	Live	75
9.4.1.	Switching the split mode.....	76
9.4.2.	To save the video	76
9.4.3.	Print	76
9.4.4.	Screen capture	76
9.4.5.	Activex Settings.....	77
9.4.6.	Status tab	77
9.4.7.	Log tab	77
9.4.8.	PTZ tab	78
9.5.	Search.....	79
9.5.1.	Search Viewer at a Glance	79
9.5.2.	Search by time	80
9.5.3.	Search by event.....	80
9.6.	Setup	80
9.6.1.	Setup Viewer at a Glance.....	81
9.6.2.	Camera	81

9.6.3.	Camera Setting.....	81
9.6.4.	Covert Setting	82
9.6.5.	Motion Setting	82
9.6.6.	PTZ Setting	83
9.6.7.	Display.....	83
9.6.8.	OSD Setting	83
9.6.9.	Monitor Settings	83
9.6.10.	Audio	83
9.6.11.	User	83
9.6.12.	Network.....	84
9.6.13.	System	85
9.6.14.	Storage	86
9.6.15.	Event.....	87
9.6.16.	Record Setup	89
10.	Mobile Viewer	92
10.1.	nviewer.....	92
10.1.1.	nviewer specification.....	92
10.1.2.	Using the nviewer on iPhone.....	92
10.1.3.	To connect to NVR with nviewer	92
10.1.4.	Using nviewer with android.....	95
10.1.5.	To connect to NVR with nviewer	96
11.	Archive Viewer.....	99
11.1.	Getting started with the backup Player	99
11.2.	Backup Player at a glance.....	101
12.	Appendix.....	104
12.1.	Specification	104
12.2.	Compatible hdd Specifications.....	105
12.3.	Troubleshooting (FaQ)	106

1. Overview

1.1. Safety instruction

The Company shall not have any responsibility for any accident or damage that may incur during the use of the product.

For your safety, we provide a few instructions about installation, manipulation, cleaning, assembly/disassembly of the product as below. So please read carefully and comply with the instructions.

Before installation

Comply with the following instructions to prevent a fire, explosion, system failure or electric shock.

- Remove the power supply module before proceeding.
- Check the input voltage (AC100V–AC240V) to the power supply module before connecting it.
- Keep the product away from humidity.
- Ensure that all devices connected to the product should be properly earth-grounded.

In operation mode

Comply with the following instructions to prevent a fire, explosion, system failure or electric shock.

- If you need to open the cover, consult with a service person who could help you do what you want to do.
- Do not connect multiple devices to a single power socket.
- Keep the product away from dust or too much combustible substances (ex: propane gas).
- Do not touch it with wet hand.
- Do not insert a conductor in the vent of the ventilation system.
- Do not apply excessive force to unplug the power cord.

Disassembly & Cleaning

- When cleaning on the surface, use a dry cloth.
- Do not wipe the product using water, paint thinner or organic solvents.
- Do never dismantle, repair or modify the product by your own.

During installation

To prevent an accident or physical injury and to operate NVR properly, please comply with the followings:

- Secure at least 18 centimeter of distance between cooling fan and wall for a proper ventilation.
- Install the product on a flat surface.
- Keep it away from direct sunlight or excessive temperature.

While in use

- Do not apply force to or shake it while using it.
- Do not move, throw away or put excessive force to it.
- Using any unrecommended HDD may cause a system failure. Check the compatibility list and use only compatible HDDs.
{system failure or data loss caused by an incompatible HDD will void your warranty.}

CAUTION

Replaceable batteries

Risk of Explosion if Battery is replaced by an Incorrect Type. Dispose of Used Batteries According to the Instructions.

Warning to service personnel

Double pole/neutral fusing

Ethernet Instruction

This equipment is indoor use and all the communication wiring are limited to inside of the building.. or similar word.


1.2. Key Features

This product allows you to receive audio and video signals from a max of 4/8 CH Full HD(1080p) network camera before saving them to the internal HDD. Besides, you can also transfer them to an external device that can be monitored on your PC or mobile phone remotely.

- Display the video from up to 4/8 CH 1080p network camera in real time (Max 120/240 fps)
- Save the video from up to 4/8 CH 1080p network camera in a max of 8Mbps (Max 120/240fps)

- Play up to 4/8 CH 1080p video in real time (Max 120/240 fps)
- H.264 BP/MP/HP network camera supported
(BP: Baseline profile, MP: Main profile, HP: High profile)
- Support PoE(for camera) for all channel
- 'Plug & Display' camera connection
- Protect the IP camera via secured closed circuit LAN environment
- Auto notification with self diagnosis (HDD S.M.A.R.T, temperature, network connection status, fan error, etc.)
- Dual streaming supported for a remote display
- Auto resolution & FPS adjustment for a remote service
- External eSATA HDD supported (For Video Recording)
- Various search methods (time, event, bookmark and thumbnail)
- Mass storage backup via USB port or FTP server
- Dedicated smart phone applications that can be used with iPhone and iPad or on Android OS
- 1080p Full HD GUI


1.3. What's included

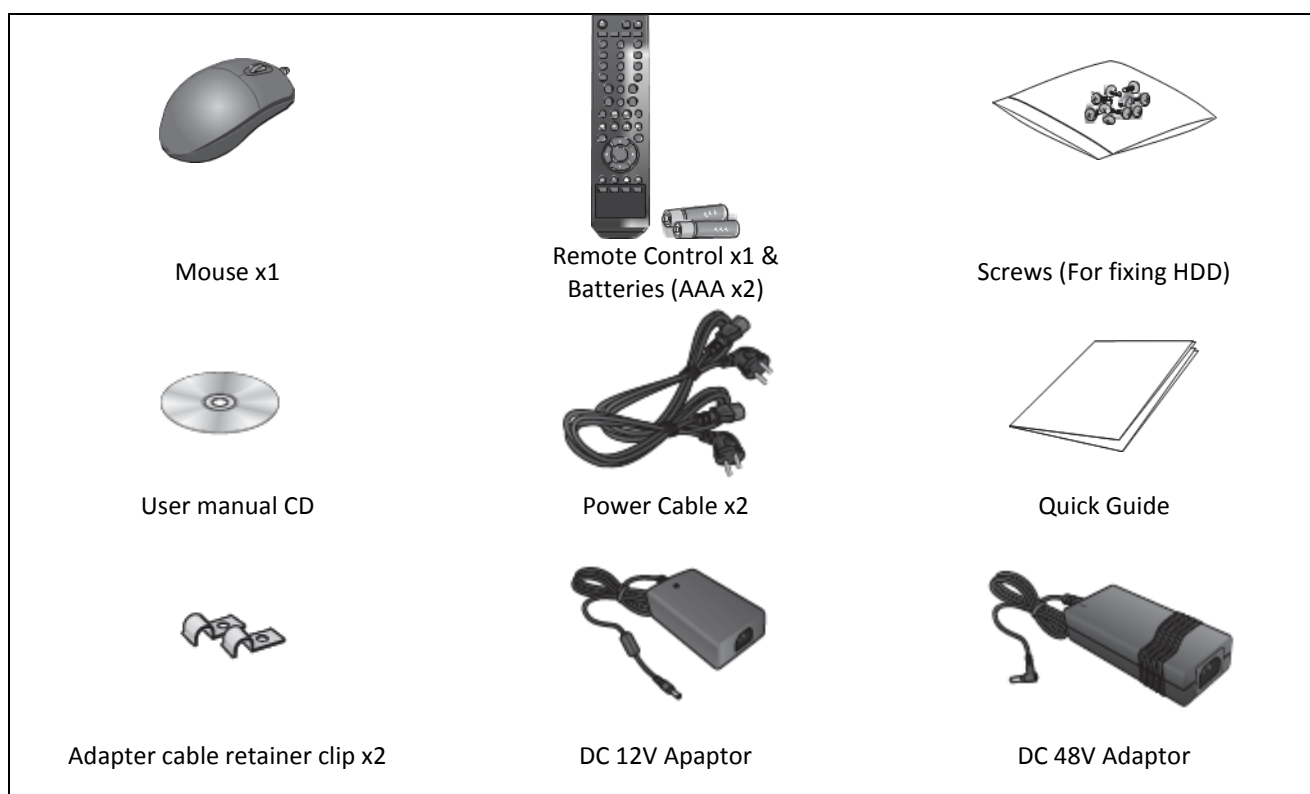

1.4. Front Panel


Name		Description
IR Remote Control Re		Receive the signal from the remote control.
USB		Used for connecting USB storage or mouse
Status LED	POWER REC NETWORK ALARM	Show the status of power, recording or network connection together with the corresponding alarm

1.5. Rear Panel

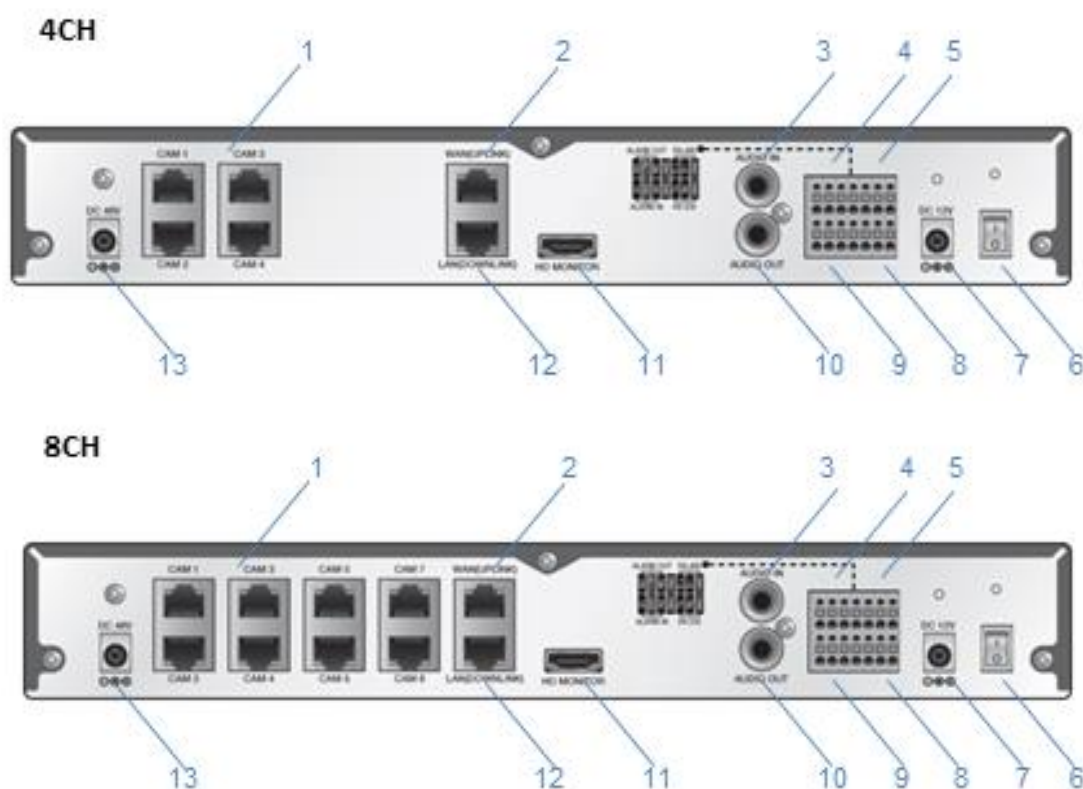

No.	No. Name	Description
1	CAM1~CAM8	Ethernet ports used for connecting the network camera video and power.(Can supply power to cameras with PoE function)
2	WAN(UPLINK)	Network port for connection to the Internet, router or hub.
3	AUDIO IN	Microphone connection port.
4	ALARM OUT	Alarm output device connection port.
5	RS-485	Communications port for connecting peripherals such as system keyboard.
6	Power Switch	NVR power switch. Plug the power cord and turn this switch on.
7	DC 12V	NVR power input port. Connect to a 12V adaptor
8	RS-232C	Signal connection port for POS and ATM. !Scheduled to be upgraded.
9	ALARM IN	Alarm input signal port.
10	AUDIO OUT	Port for speaker connection.
11	HD MONITOR	Port for connecting a full HD(1920x1080) supported monitor.Use the HDMI cable to connect with a 1080p 60Hz monitor.
12	LAN(DOWNLINK)	Exclusive Port dedicated to connect the NVR Hub. (Do not share with other device.)
13	DC 48V	Power input port for the camera (PoE compliant). Connect to a 48V adaptor.

1.6. Remote Control At a Glance

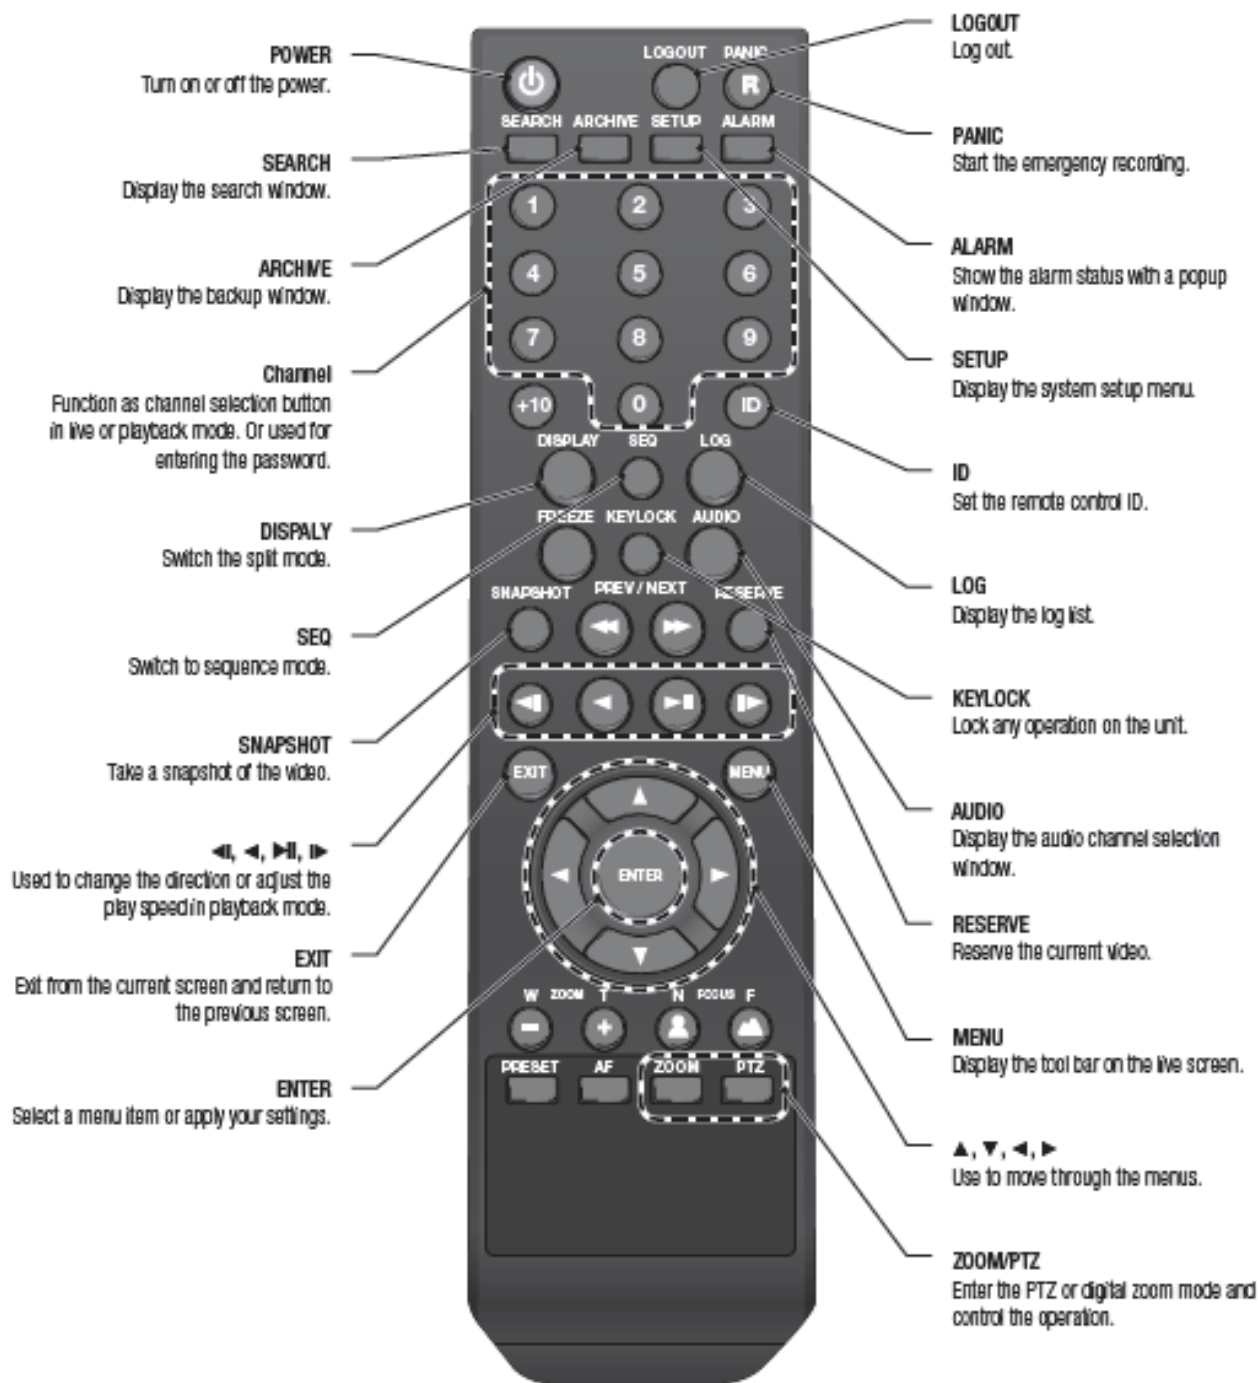

1.7. Change the remote control ID

The remote control will be active only if the remote control ID matches with that specified on the NVR.

If multiple NVRs are installed on one place and you have just a single remote control, use the ID button to set the remote control ID.

Only the ID-matching NVR can be controlled.

1. From **<SYSTEM>** - **<CONTROL DEVICE>** under the System Setup menu, set the **<REMOTE CONTROLLER ID>** and press **<APPLY>**.

Select between 00 and 99. For more details, refer to **<SYSTEM SETUP>**.

The remote control will be active only if the remote control ID matches with that of the NVR's system ID

2. Press the [id] button on the remote control. The default remote control ID is 00.
3. Use the number buttons to provide a two-digit ID. If you want to enter 01, for instance, enter the number 0 and 1 in sequence.






Check if the remote control ID is set properly by manipulating the remote control.

4. To reset the ID to 00, press and hold the **[ID]** button.


2. Installation

2.1. HDD Replacement

User can replace hard disk if existing one reaches its full capacity or becomes problematic.
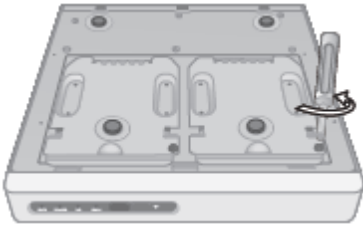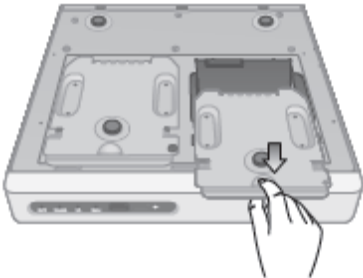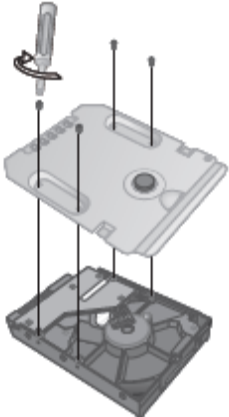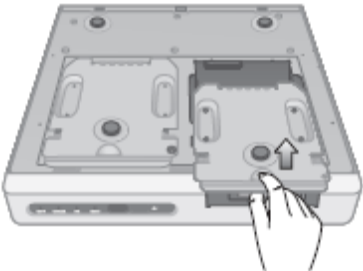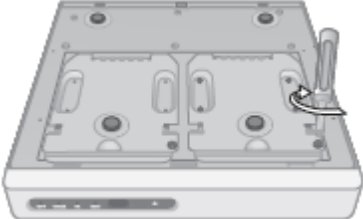
<p>1. Remove the bracket screw on the bottom of the NVR.</p>	
<p>2. Hold the bracket handle in the middle and pull it out to separate the bracket from the main unit.</p>	
<p>3. Install the HDD on the separated bracket and fasten 4 screws on both sides to secure the HDD. ! When installing HDD, make sure to install in the correct direction.</p>	
<p>4. Insert the bracket installed with HDD back into the main unit.</p>	
<p>5. Fasten the bracket screw removed earlier.</p>	

2.2. Basic Layout

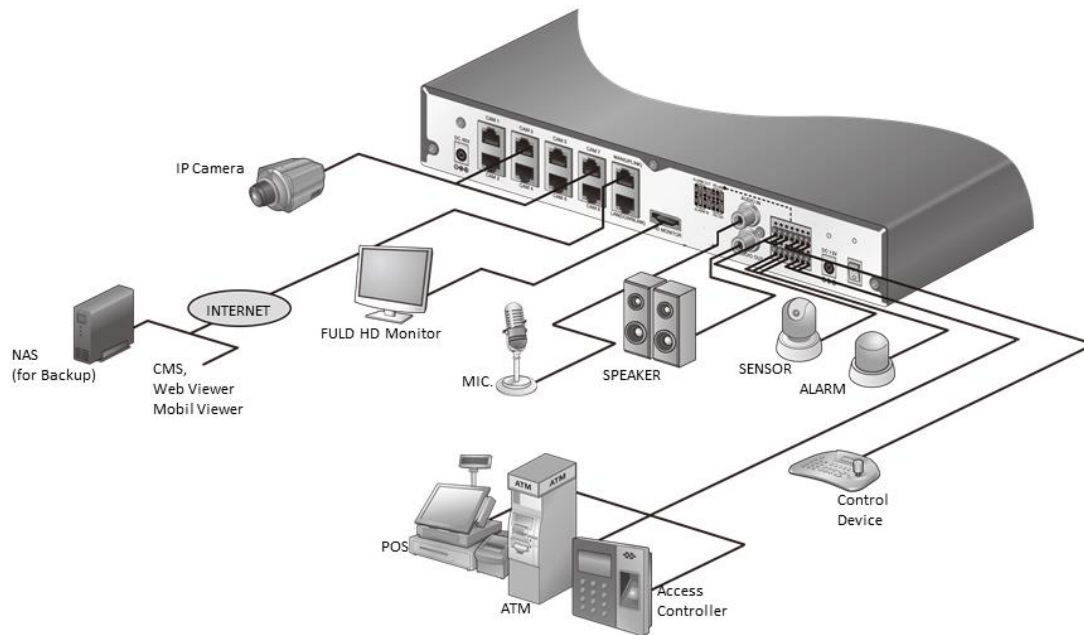

2.3. Precautions

To secure recording stability from an overloaded network traffic, hacking attempt or DoS (Denial of Service) attack, only the direct cable connection between camera and NVR is allowed.

! Using a hub is allowed only for extending single channel for extended transfer range to 100m each.

Any access from an outside PC to the IP camera will be strictly prohibited for the purpose of secure operation.

! Signal connection for POS and ATM is scheduled to be upgraded later.

2.4. Connecting to an external device

2.4.1. Connecting to the monitor

The product supports 1080p 60Hz monitors with HDMI connection and 1920x1080 resolutions DVI monitors only. Connect the HDMI cable between HDMI output port in the bottom rear panel and HDMI port of the monitor, or use the HDMI to DVI cable to connect to the DVI port of the monitor.

2.4.2. Power connection

Two adaptors are provided: one for NVR operation (DC 12V), and the other for PoE (Power Over Ethernet, 48V).


2.4.3. NVR power connection

Plug the provided DC 12V adaptor in the rear power port of the NVR.

2.4.4. Poe Switching hub power connection

Plug the provided DC 48V adaptor in the rear power port of the NVR.


When done, attach the adaptor cable clip to the rear panel and insert the cable in.

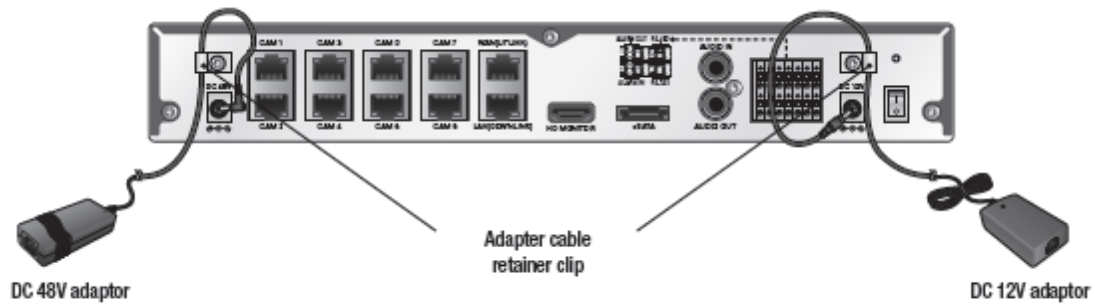


- Make connection when the power is not applied yet.
- Arrange up the cables and be careful not to peel off the cable coating.
- Do not place the power cord under the carpet or rug. The power cord is usually earth-grounded. However, even if it's not earth-grounded, do never modify it on your own for earth-grounding.
- Do not insert multiple devices in a single power socket. Otherwise, it may cause a power overload.
- For stable power supply, this product provides two separate adaptors and two corresponding AC cords by factory default. Make sure all cables are connected properly.

2.4.5. Connecting the camera

You can connect a PoE-featuring IP camera to the rear [CAM1]~[CAM8], RJ45 port using the CAT5 10/100Mb Ethernet cable without a separate power source.

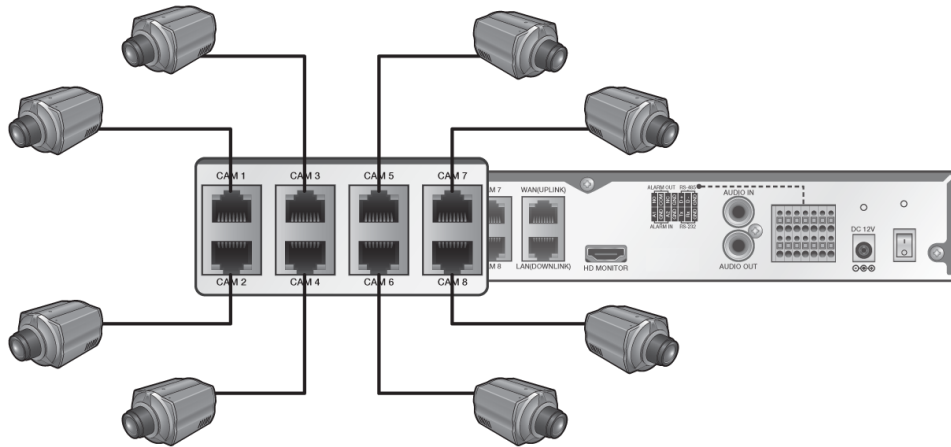


- If the IP camera provides the alarm I/O port or Audio I/O port, you can make alarm or audio connection. For more details, refer to the user manual of the IP camera.
- The Ethernet connection is effective within 100 meter in distance. Beyond that, you may encounter a data loss or failure to connect to the camera. If you need to make cable connection of longer than 100 meters, use a separate PoE extender for cable extension.
- The total power consumption of the IP cameras should not exceed the rated power capacity of the 48V PoE adaptor. Beyond that, the video may not be played properly or no video will be displayed at all. If this is the case, use a separate (additional) power source for supplying power to the cameras.
- Even if total power requirement meets PoE device's power capacity, a camera of more than 15W power requirement per a port cannot be used.
- Each camera's power consumption can be checked on the network map screen, and total power consumption should consider camera's maximum possible consumption with optional accessories (such as IR / heater device).

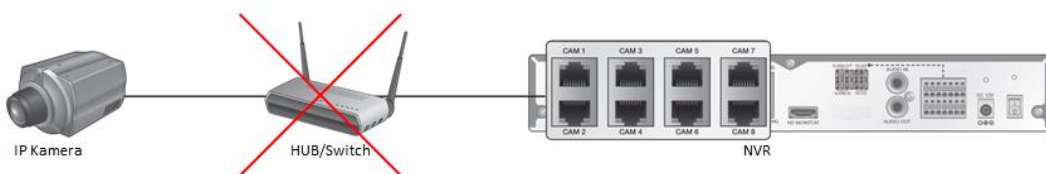

- For stable operation, a dedicated communication line is established for IP cameras in the same network. This is why network router or hub connection is not allowed.


2.4.6. If the distance between the NVR and IP camera is more than 100m

You may extend the transfer range by connecting a switching hub or PoE device between the Ethernet port and IP camera if desired distance is longer than 100m.

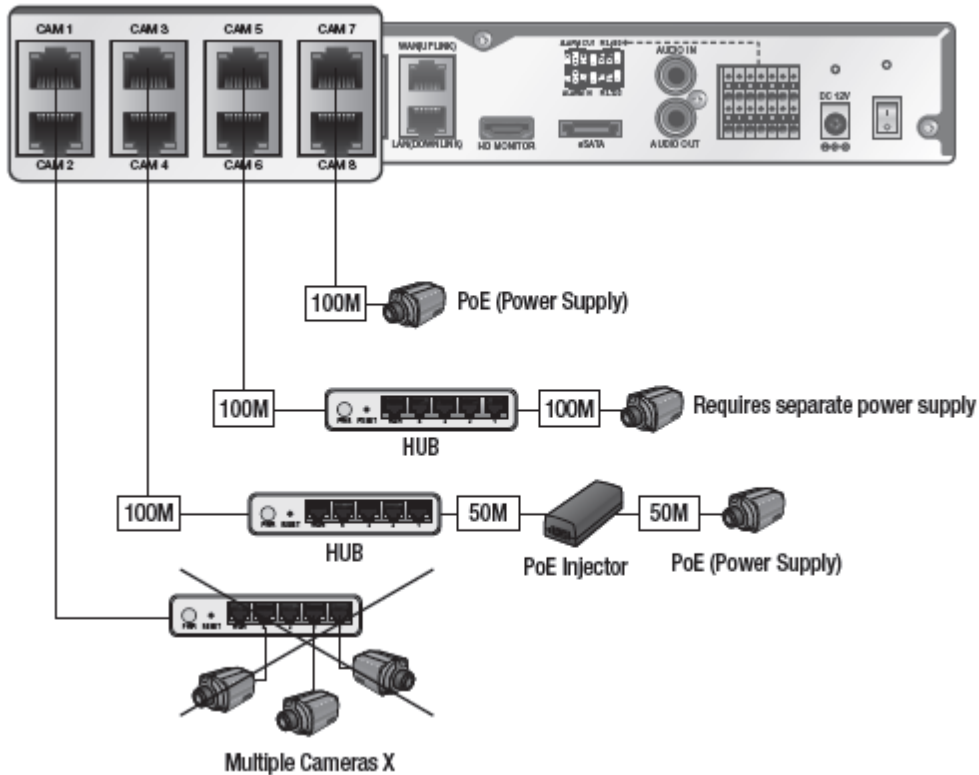

- Connecting cameras directly to a general switching hub requires camera connected to a separate power supply.
- A switching hub connected for extending transfer range of a single channel should be connected to one camera only.

2.4.7. Alarm I/O Connection

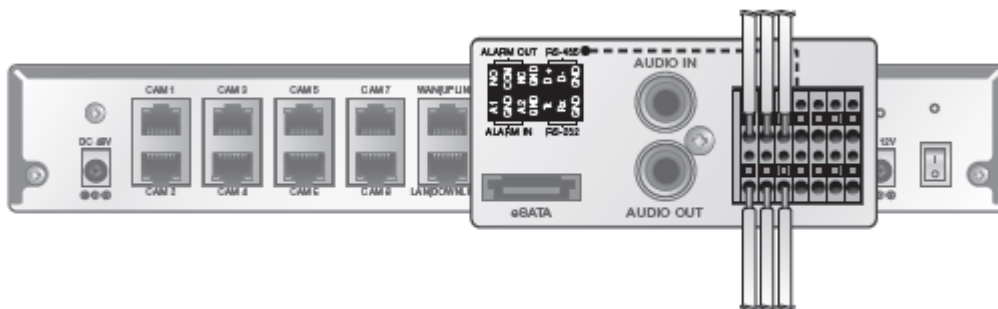

To connect the alarm input signal

Connect the signal line of an alarm input device such as sensor to the rear [ALARM IN] port.


1. While pressing and holding the [A1] or [A2] port button in the rear bottom of the NVR, insert the alarm signal cable in the hole under the button.
2. Insert the grounding wire in the [GND] port.
3. To ensure secure connection, release the button and pull out the wire to check if it's not pulled out.
4. To remove the wire, pull it out while holding the upper button.

To connect the alarm output signal

Connect the signal line of an alarm output device to the rear [ALARM OUT] port.

1. Check the relay output type of Normal Open or Normal Close before selecting a proper type (N/O or N/C).
While holding the [N/O] or [N/C] button, arrange the alarm signal cable through the hole under the button.
 - a. NO(Normal Open) : Normally Open but switching to Close if an alarm out occurs.
 - b. GND : Insert the grounding wire.
 - c. NC(Normal Close) : Normally Close but switching to Open if an alarm out occurs.
2. Insert the grounding wire in the [GND] port.
3. To ensure secure connection, release the button and pull out the wire to check if it's not pulled out.
4. To remove the wire, pull it out while holding the upper button.

2.4.8. Communication Port

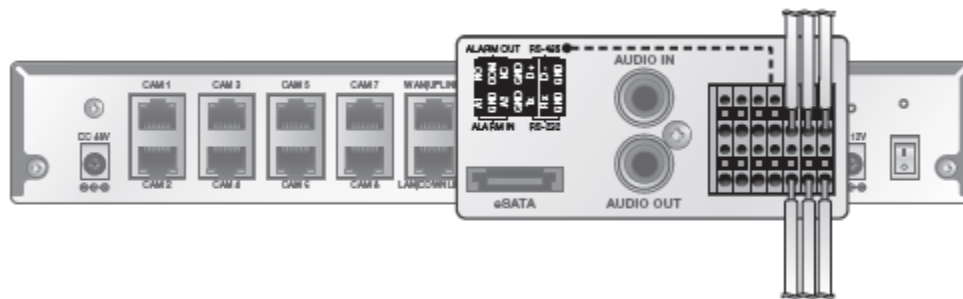

RS-485 connection

Connect the keyboard controller.

You can connect a text-in device such as POS or ATM. After connecting the control device, be sure to match the connection settings between NVR and device. Make communication settings in <CONTROL DEVICE>.

1. Use the signal wire to make connection between [D+] of the terminal block plug and [D+] of the keyboard controller.
2. Make connection between [D-] of the terminal block plug and [D-] of the keyboard controller.
3. Make connection between [GND] of the terminal block plug and [GND] of the keyboard controller.
 - a. For RS-485 connection, refer to the user manual of the keyboard controller.
 - b. Signal connection for POS and ATM is scheduled to be upgraded later.

RS-232 connection

You can connect a text-in device such as POS or ATM.

For connection of the text-in device, refer to the user manual of the text-in device.

- > Signal connection for POS and ATM is scheduled to be upgraded later.


Audio device connection

You can connect an audio output device such as speaker amplifier.

Connect the audio input device such as microphone to the rear Audio In port, connect the audio output device such as speaker amplifier to the Audio Out port.

2.4.9. **USB Device**

You can connect and use USB storage devices for backup of recorded video, saving snapshots, firmware updating, You can also connect the USB mouse to control all operations of the NVR.

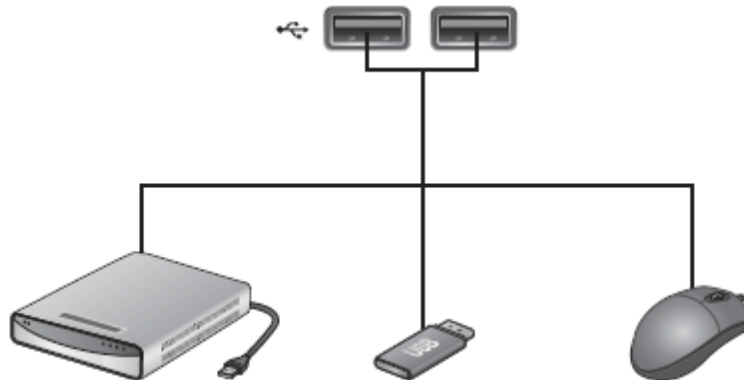


! If you need to connect a USB HDD with a high power consumption, it is recommended to use a separate power source for that HDD.

2.4.10. **Network Connection**

Pc connection in the local network


You can connect NVR to a PC in the same network and control or manipulate it on the PC monitor

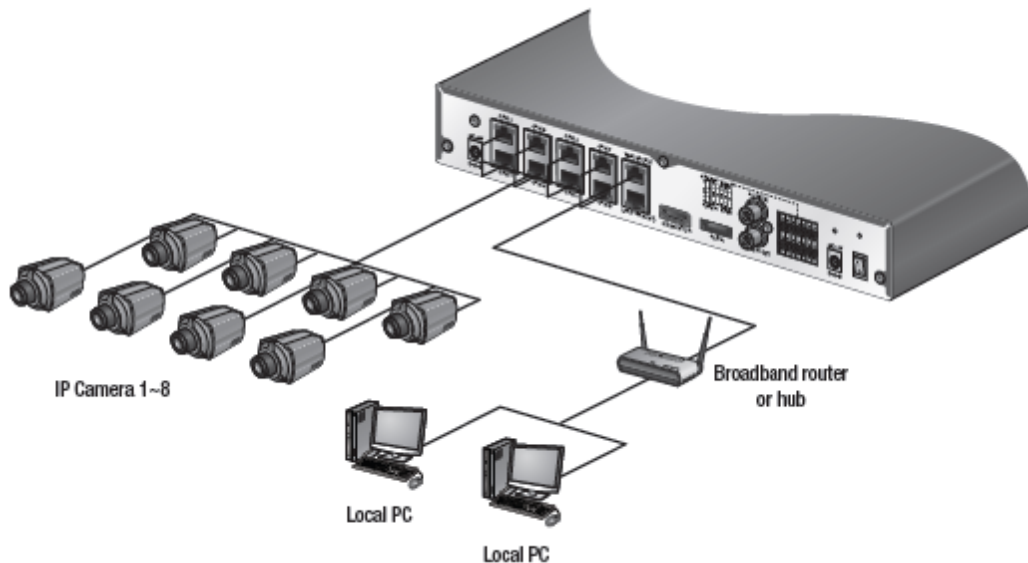


1. Connect the [WAN(UPLINK)] port in the rear panel to the router or hub.
2. Connect the local PC to the router or hub.
3. Enter the address in the address bar (web browser) of the local PC or of the dedicated software program in the format of "http://iP address:web service port ".
(Ex : http://192.168.0.23:8080) The web service port is set to 8080 by default. From the Network Setup screen, you can change the port number.
4. Provide the ID and password before logging in. Then, you can view the monitoring screen.
Access ID (factory default) : **ADMIN**, P/W : **1234**.
! For security purpose, change the password before you use the product for the first time after purchasing it.

2.4.11. **Pconnection from a remote network**

You can connect NVR to a PC or mobile device in the same remote network and control or manipulate it on the monitor of the PC or mobile device

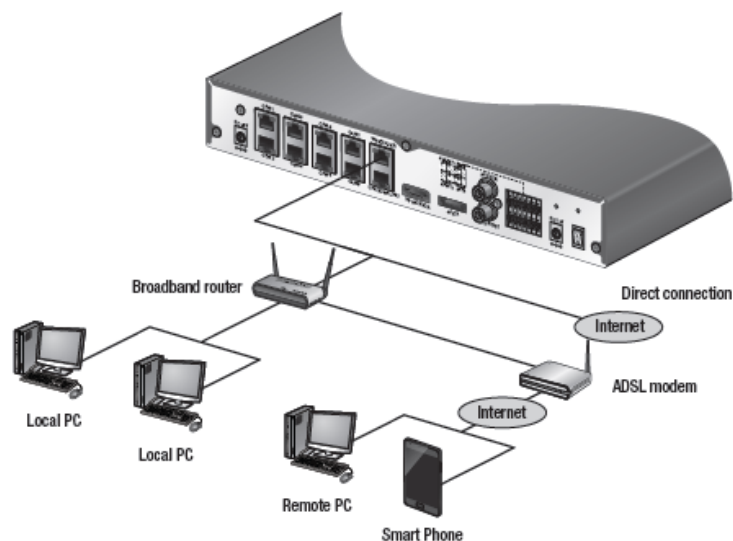

1. Connect the [WAN(UPLINK)] port in the rear panel to the router

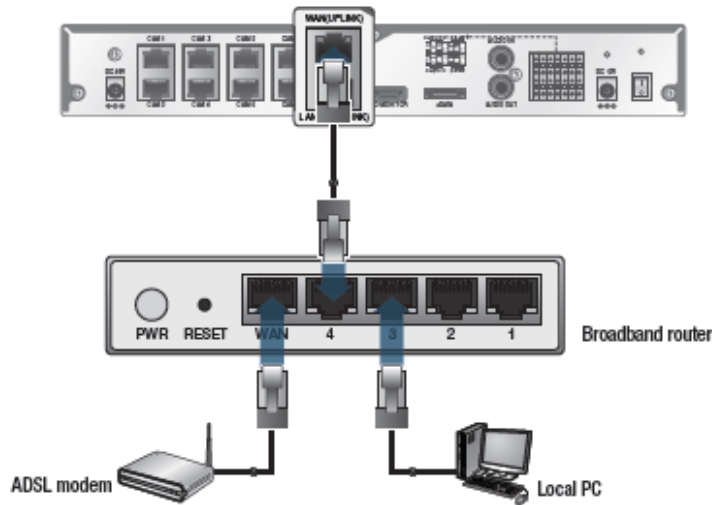


2. Connect the [WAN(UPLINK)] port of the router directly to the fixed IP LAN cable, or connect it to the ADSL modem.
3. If using the router, set the port forwarding and enter the DDNS address in the address bar (web browser) of the remote PC, or of the dedicated software program or mobile phone. For the IP and DDNS address settings, refer to "Network Setup".
4. If the MAC address of the NVR is 00-11-5F-12-34-56 and the web port number is 8080, enter "http://00115f123456.dvrlink.net:8080" in the address bar of the web browser.
If you have renamed DDNS as "mydvr", you can make network connection at <http://mydvr.dvrlink.net:8080>.

3. Monitoring

START

1. Connect the adaptor to the power input port in the rear panel of NVR.
! Make connection when the power is not applied yet.
2. Turn on the power switch in the rear panel of NVR.
With a beep, the logo screen appears several seconds after the front LED turns on.
3. When the booting process is completed, the live screen then the login screen appears.

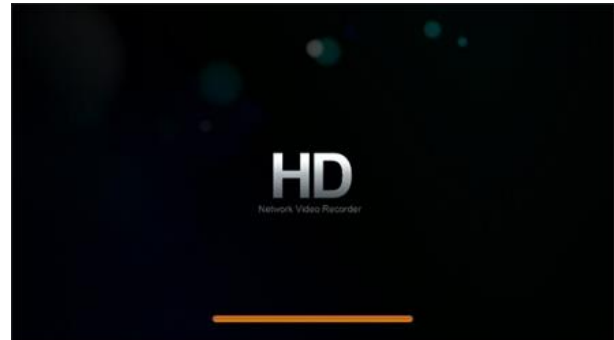

Log In

To manipulate or access the menus of NVR, you should have logged in.

1. When the system starts, the login screen appears.
2. Select a user and provide the password.
The default password of the "ADMIN" account is "1234".
3. Click <ok>.
If the login information is correct and valid, you will see the live screen.
! For security purpose, change the password before you use the product for the first time after purchasing it.




Log Out

To prevent unauthorized access, it is recommended to log out when you leave the screen.

! Hover the cursor near the bottom of the screen to display the menu.

1. In the monitoring screen, click <MENU> in the bottom left corner of the screen to <LOG OUT>, or press the [LOG OUT] button on the remote control.
2. Access to SEARCH / ARCHIVING / SYSTEM SETUP / RECORD SETUP / SHUTDOWN will be restricted.

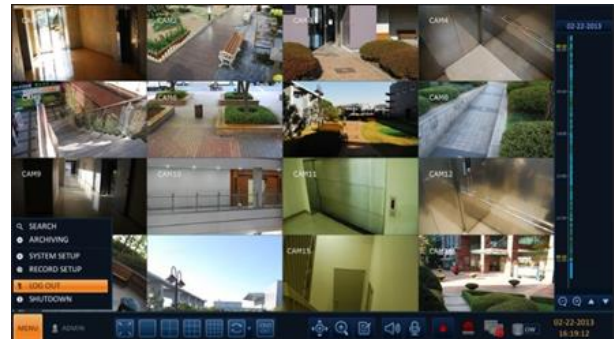


System Shutdown

1. In the monitoring screen, click <Menu> in the bottom left corner of the screen to <SHUTDOWN> the system, or press the [POWER] button on the remote control.
2. Use the virtual keyboard to enter the password.
3. Be sure to turn off the power switch in the rear panel.
! If you turn off the system in an abnormal manner such as removing the power cord while the system is in operation, the disk will have or increase the bad sectors, causing data loss and shortened life cycle of the disk.



3.1. Live Screen at a Glance

The live screen largely consists of three components: video window, status bar and timeline zone.

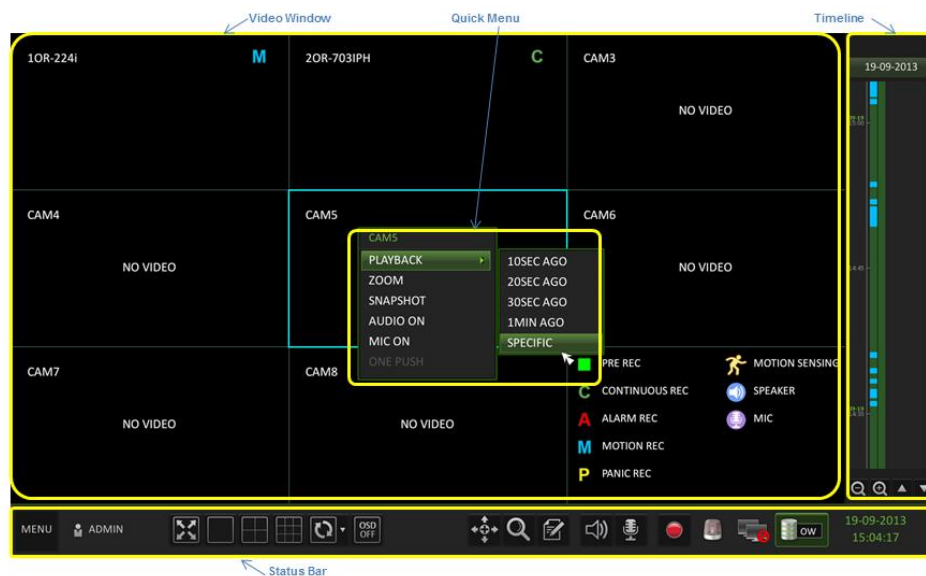

















3.1.1. Video Window

Icons used in the video window.

Item		Description
Camera ID	CAM	Show the camera ID.
Record Mode Icons		Displayed if an event recording is reserved.
	C	Display the status of the continuous recording.
	A	Display the recording status when an alarm occurs.
	M	Display the recording status when a motion event occurs.
	P	Display the status of the emergency recording.
Audio I/O Icons		The audio signal of the connected camera is outputting.
		The audio signal is transferring to the connected camera via the microphone.
Motion Detection Icon		A motion is detected by the connected camera.

3.1.2. Status bar




Press the ▼ button on the remote control, or place the mouse in the lower area of the screen to display the status bar.

Item		Description
Menu Button		Select one of the system setup, search and backup menu items before accessing it.
User ID		Show the ID of the user who has currently logged in
Screen Control Buttons		Edit the screen layout to show the status bar and timeline at all times or only when the mouse cursor hovers on the status bar/timeline.
		Select a split mode.
		Select Auto Sequence or Special Split Mode.
		Display or hide the OSD menu on the screen.
PTZ		Move to the PTZ screen. You can control the PTZ operations of a PTZ-compliant camera on the PTZ screen.
Zoom		Move to the Digital Zoom.
Quick Log		Display the log list of the recent recording events.
Audio Channel Selection Button		You can use the camera supporting the audio input to listen to the audio.
Microphone Channel Selection Button		Select a camera to which the audio signal will be transferred from the connected microphone.
Panic Record		Start the panic recording.
Alarm Indicator		Turns on if an event occurs. It does not turn on if no reaction to the event is yet defined. Click this to check the information of the event that occurred.
Network Connection Status		Check if network connection is made via an external PC or mobile device. Click this to view the details of the concurrent users and to check the network connection status. For more information, refer to "Network Setup".
Disk Space		Show the disk space information. If you have set the disk overwrite mode, it will be displayed "OW" (Over Write) from the start point of the overwriting. Click this to view the details of the disk status. For more information, refer to "Record Setup".
Date & Time		Display the current time and date.

3.1.3. Timeline

Press the [▶] button on the remote control or move the cursor to the right of the screen to display the timeline.

Double-click the timeline to move to the video screen. Drag and drop it to make backup or event search for the specified area.

Item		Description
Timeline Date	19-09-2013	Display the date of the current timeline. Click this to select a desired date of the timeline.
Expand/Collapse the timeline		Expand or collapse the timeline.
Navigation through Timeline		Navigate through the timeline. You can also use the mouse wheel to do the navigation.
Timeline Bar		Display the recording data with time. The color of each bar indicates the following: ~ Green : Continuous Recording ~ Red : Alarm Recording ~ Blue : Motion Recording ~ Yellow: Panic Recording

3.1.4. Quick Menu

Item	Description
Channel No	Display the number of the current channel.
Play	Start playing the video of the selected channel from the specified time.
Zoom	Operates (digital) zooming on the selected channel.
Snapshot Capture	Capture the current live video and save it in the .jpeg format. Then, you can save the captured video in the HDD or export it to an external USB memory device.
Audio ON/OFF	Turn on or off the audio signal of the selected channel.
Microphone ON/OFF	Turn on or off the microphone signal of the selected channel.
ONE PUSH	Automatically adjusts the focus, within the camera's focus range. It is available only if supported by the connected camera.

3.1.5. Using the status bar in the live mode

Selecting a split mode

Click a desired split mode from 1, 4, 9, 16, 6 and 8 split screen. Or press the [DISPLAY] button on the remote control until a desired split mode is displayed.
v 8CH NVR model support only 1-, 4-, 9-, 6- and 8-split screen modes.

Auto sequence

Click the Sequence button in the status bar, or press the [SeQ] button on the remote control to perform the specified sequence mode.
You can configure the sequence settings in <SeQUence>.
For details, refer to "Sequence".



Controlling PTZ

You can control PTZ cameras connected to each channel. Use the mouse to click PTZ button on the status bar, or press the [PTZ] button of the remote control to initiate the predefined sequence.

In PTZ mode, use buttons on the screen to control PTZ or use [ZOOM], [FOCUS] and [PRESET] buttons of the remote control.



Pan/Tilt control

Use mouse to rotate the PTZ camera in the direction of up/down/left/right and diagonal directions.

You can control Pan/Tilt with [▲▼▶◀] buttons of the remote control



Zoom / Focus Control

You can control the PTZ camera for zooming and focus adjustment.

Click <ONE PUSH FOCUS> button to adjust the camera's focus automatically.


If the connected camera supports manual iris adjustment, you can adjust the iris setting.

You can control by using [ZOOM] and [FOCUS] buttons of the remote control.



Click <PROPERTY> and change to a desired setting of the PTZ camera (for auto focus, auto IRIS, pan/tilt speed, zoom speed, focusing speed, iris speed).
! Depending on the PTZ camera manufacturer and model, some of the PTZ properties may not be applicable.

CH : Selects the PTZ camera connected to the NVR.
> PRESET (No. / Name) : You can select the preset number and name.
! Up to 255 presets can be selected for a PTZ camera, while up to 16 presets can be registered to one NVR.

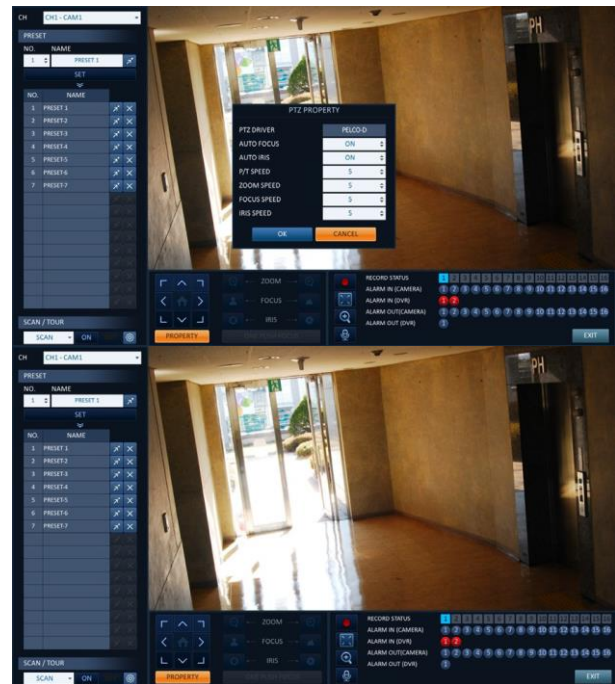

Control the Camera's PTZ while watching the video. Press the <Set> button to append the preset.





Click the shortcut icon to move to the corresponding PTZ (preset) position.





Click Delete icon to delete the corresponding preset.

! PRESET: Memorizes the PTZ camera's framing for direct access at a later time.

SCAN/TOUR

1. Select <Scan> and click the <on> button.
2. Click the  icon
3. Select a user-defined preset and register it.
! DWELL : Sets the dwell time of 00 seconds before moving to the next preset location.
<SCAN> function patrols two preset positions at the specified speed and interval for back-and-forth monitoring.
4. Select <TOUR> and click the <ON> button.
5. Click the  icon.
6. Select a user-defined preset and register it.
! DWELL: Sets the dwell time of 00 seconds before moving to the next preset location.
<TOUR> function patrols multiple presets in order (PRESET1 ; PRESET 2 ; PRESET 3 ;...) for automated patrolling monitoring.

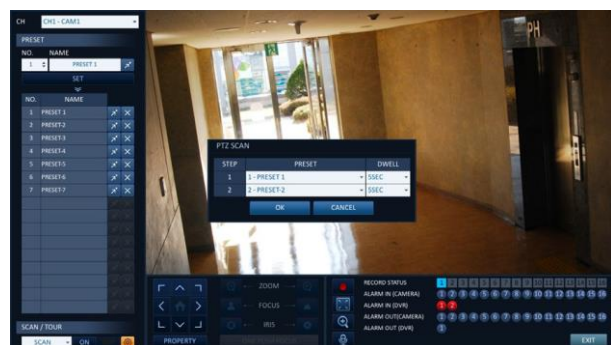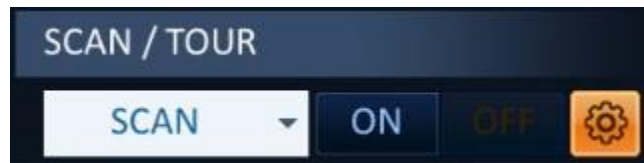

3.1.6. Digital Zooming

You can enlarge the monitoring screen for better view.

Zooming will enlarge the video of the selected channel. If no channel is selected, channel 1 will be zoomed.

1. Click Zoom in the status bar or move the cursor to a desired channel and right-click it to display the context menu. Select <ZOOM>. You can also press the [ZOOM] button on the remote control.
2. Move to the zoom control screen. When the menu bar appears in the right bottom, use the buttons to control the zooming.

: Select a channel to zoom in/out.

: Zoom out the current (enlarged) image step by step.

: Enlarge the current image step by step.

Zoom Box : Use the yellow box to move to or select a desired zooming area.

: Exit the zooming screen and return to the live screen.

By its nature, digital zooming which interpolates original image to have it enlarged, it may produce less clear image compared to the original.

For clearer zooming, it is recommended to use a camera that supports optical zooming.

To check the event log

You can check the log of the events that occurred.

1. Click Log to display the "EVENT LOG" window. The log list is sorted with the latest one on top.
2. Double-click a desired log to display the event video. You will move to the play screen of the selected log.


To select an audio input channel

Select a channel from which the audio signal will be received.

>CHANNEL : Produces the selected channel's audio, regardless of the split screen mode.

>LINK TO FULL SCREEN : When switching the NVR display mode to view one channel (Single Split), it produces the selected channel's audio.

v A camera supports audio input should be used, and the NVR is connected to a speaker.

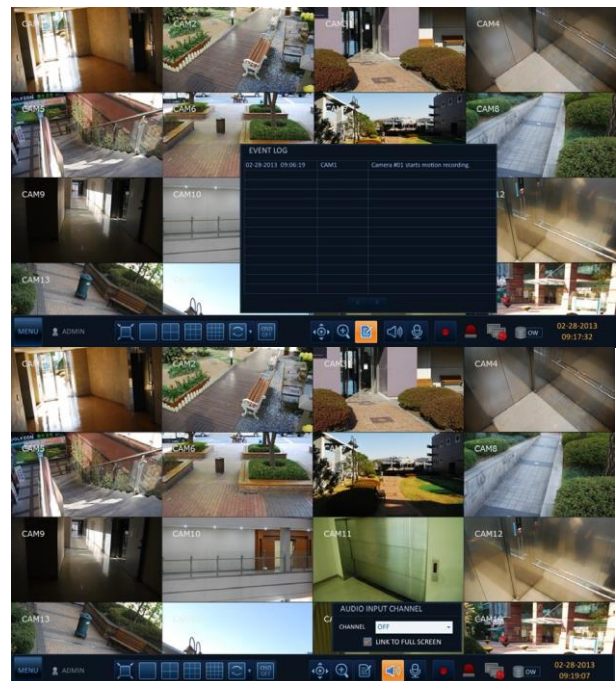

To select an audio output channel

You can select a camera outputting the voice signal from the microphone that is connected to NVR.

To check the alarm status

You can check the alarm status of each camera.
Click <OK> to close the window.

To check the network status

You can check the network connection status.
Click <OK> to close the window.
! For more information, refer to "Network Status".

To check the disk status

You can check the storage space of the current disk and check also if there is any problem with the disk.
Click <OK> to close the window.
! For more information, refer to "Disk Information".


Saving Captured Snapshots

You can capture the current video screen and save or export to a connected storage device.

1. Select a channel first, and right click to open popup menu, and select <SNAPSHOT> menu item, or press the [SNAPSHOT] button of the remote control.



2. Connect a storage device, and click <EXPORT> button.
To save the captured image onto the built-in HDD, press the <RESERVE> button.
Saved image can be found in the “Archiving > Reserved data management” and can be backed up.
3. Enter the <TAG NAME> and <MEMO> and press <BURN> or <ERASE & BURN> button.
 - A progress bar appears and indicates the progress of exporting to storage device.
 - BURN : Snapshot is stored in the connected USB storage device.
 - ERASE & BURN : Deletes all files in the connected USB storage and then saves the snapshot.
 - Note that <ERASE & BURN> option erases all data in the USB storage device and will not be restored once deleted.

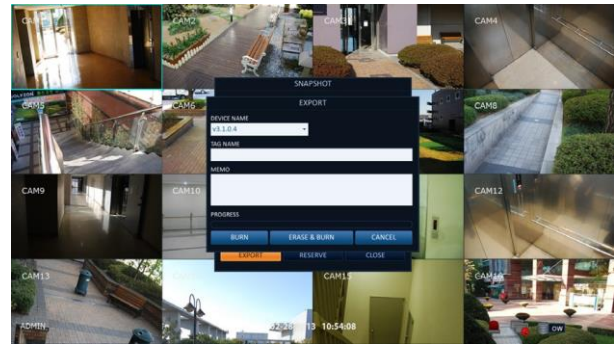

4. System Setting

4.1. To move to the System Setup menu

How to use the Mouse



How to use the remote control 1



How to use the remote control 2




4.2. Camera Setting

You can configure the camera settings on the NVR screen regarding the camera title, image, hide/show, motion and PTZ.


4.2.1. Camera Title

You can change the camera ID that is displayed on the screen.

1. From <SYSTEM SETUP> - <CAMERA>, select <CAMERA TITLE>.
2. Use the [▲▼◀▶]/ENTER] buttons on the remote control or use the mouse to select a channel that you want to rename.
Alternatively, simply double-click the camera to rename from the top left corner.
! Up to 12 alphanumeric letters can be entered.

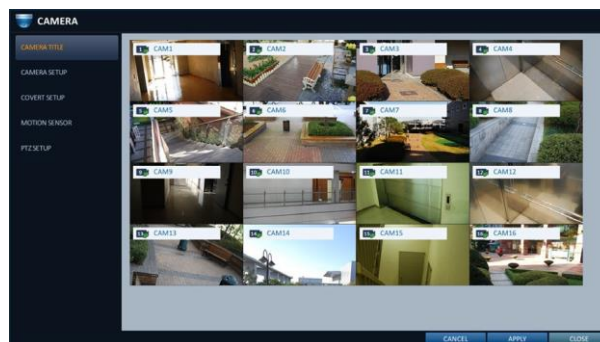



3. With the virtual keyboard that appears, enter a camera title and click <OK>.
4. To apply the change, click <APPLY> in the bottom of the screen.
5. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu

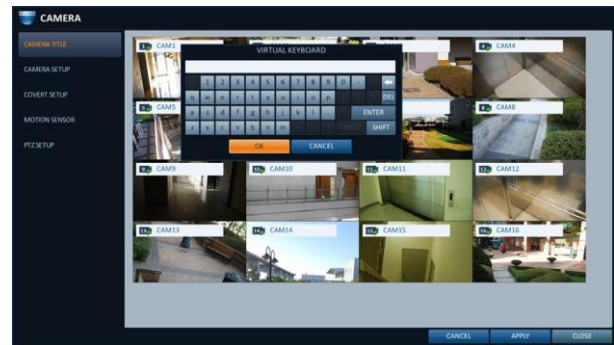

4.2.2. Camera Setup

Adjust the brightness, contrast, color and quality for each channel to your preference.

1. From <SYSTEM SETUP> - <CAMERA>, select <CAMERA SETUP>.
2. Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to set each option of the camera setup menu.
 - > IMAGE SETTINGS : Configures detailed image capturing setup for the camera.
 - > EXPOSURE : Controls the camera's exposure adaptively to ambient lighting condition of installed location.
 - > DIRECT CONFIGURE : Connects to the IP camera via web to manipulate directly.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

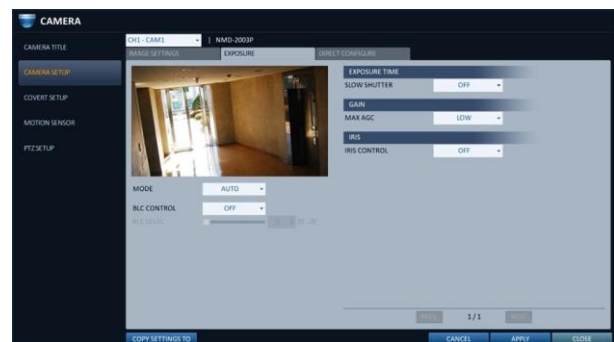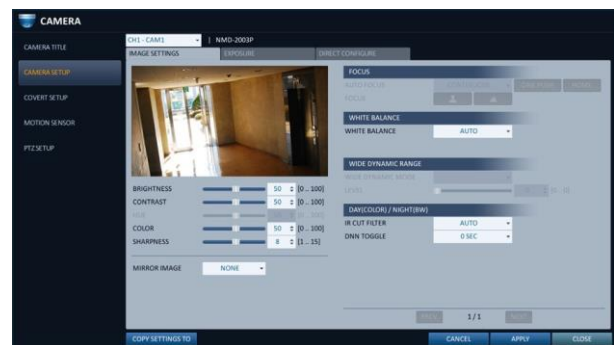


4.2.3. Direct Configuration

Direct configuration support may differ from camera manufacturers.

If supported by the camera, you can access the camera via web to directly manipulate the camera, for updating the camera's firmware for example.

For cameras not supporting direct configuration over web, use the computer connected to the camera for configuring it.


1. Select <DIRECT CONFIGURE> from the <CAMERA SETUP>.
2. Press the <START> button to display a popup message.
 - ! Recording stops for the corresponding channel during manipulating the camera.

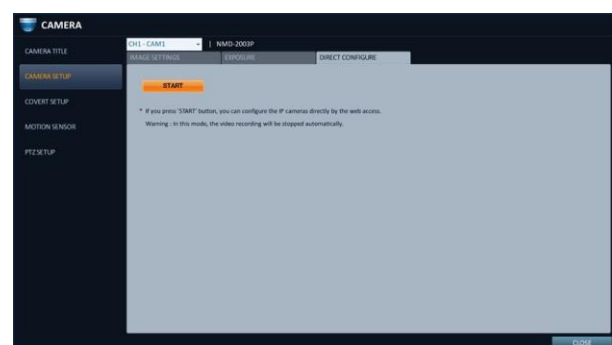

4.2.4. Covert Setup

You can set to hide the camera video so that a specific user or user group can not view. Set a channel(s) that you want to hide from a specific user or user group.

- From <SYSTEM SETUP> - <CAMERA>, select <COVERT SETUP>.
- Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to select a covert channel(s) from a specific user group.
 > ADMIN, MANAGER, USER : Set them to <on>. The selected channel will be covert from the applicable user account.
 > LOG OUT : Set it to <on>. When the user logs out, the current channel will be set to a covert channel.
 > SHOW AS : Sets how to display video of the <COVERT CHANNEL> channel.
 - NO VIDEO : Appears to have no video for the channel.
 - COVERT : Shows nothing for the Live screen only.
- To apply the change, click <APPLY> in the bottom of the screen.
- When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.
 ! To change the covert settings from user group to user, move to the <USER> menu and make necessary changes.

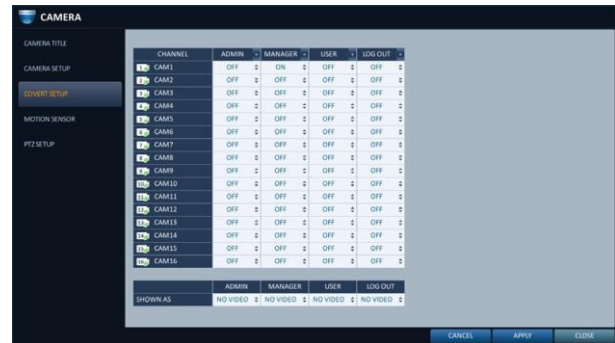

4.2.5. Motion Sensor

Set the motion sensor of the camera so that it can detect a motion event.

- From <SYSTEM SETUP> - <CAMERA>, select <MOTION SENSOR>.
- Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to specify the use of each option item.
 ! ACTIVATION : Set whether to activate motion sensor of the camera channel.
 ! MOTION MARK : Set to <ON> to display motion detection indicator on the corresponding channel's video.
- To apply the change, click <APPLY> in the bottom of the screen.
- When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.



4.2.6. Motion area Setup


Setting the motion area may differ depending on the camera model. Below is a typical setting of the motion area.

1. Click <AREA SETUP> to move to the motion area setup screen.
2. Select a channel to define a motion detection area.
3. Use the arrow buttons to move to a desired block and press [ENTER]. The area setup will begin. Then, use the arrow buttons to specify the area. Alternatively, you can use the drag-and-drop method to specify or release the area as using mouse.
4. If you select the specified area again, it will be released.
5. You can set the channel's detection period for day and night, sensitivity, minimum number of blocks and interval.
 - > DAYTIME : specify the time period that will be considered as daytime.
 - > SENSITIVITY : Sets the sensitivity level for detection during the day time or night time. The higher the level, the higher the detection sensitivity.
 - > MIN BLOCK : 1(High) ~ 10(Low) - The lower the number is, the higher the sensitivity level becomes.
 - > INTERVAL : A detected motion may trigger events continuously; set the interval to ignore such unnecessary trailing events.
 - > SELECT ALL : Select all area as motion detect area.
 - > DESELECT ALL : Deselect all selected area.

Images recorded in a low contrast scene such as at night cause severe noise, triggering the motion event too often.

If this is the case, reduce the nighttime sensitivity to a degree.

! The above options such as <SENSITIVITY> and <MINIMUM BLOCKS> and how to set the motion area may be restricted depending on the specification of the connected camera.

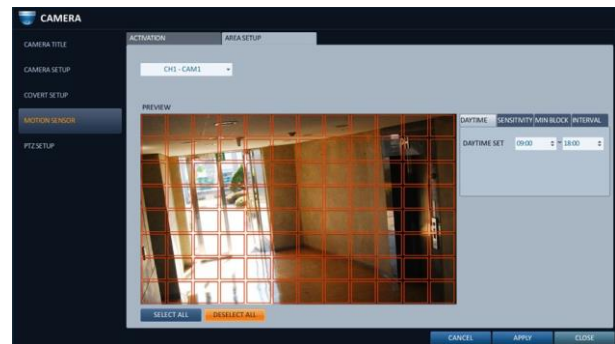


4.2.7. PTZ Settings

You can set the camera ID, protocol, baud rate and data transmission speed for each channel.

1. From <SYSTEM SETUP> - <CAMERA>, select <PTZ SETUP>.
2. Use [▲▼◀▶]/ENTER buttons of the remote control or mouse to set the address (ID), protocol and data transmission speed for each channel.
 - ! RS-485 : You can manually configure RS-485 communication connection to the pan/tilt base (PT driver) of IP Box type camera or motorized zoom lens. Check to enable editing <ID>, <PROTOCOL> and <BAUD RATE> submenu items.

IP PTZ cameras and others that transfers PTZ control signal over IP network require no separate settings.
3. To apply the change, click <APPLY> in the bottom of the screen. Once clicked <APPLY> button after changing settings, a restarting message pops up.

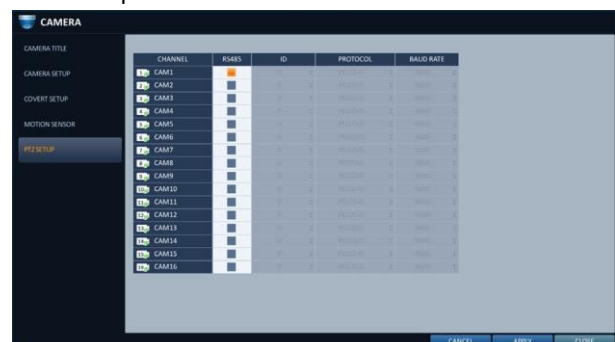

Click <YES> to restart the system automatically.

4. Once the setup is complete, press the [EXIT] button of the remote control or click <CLOSE> button on the bottom to display a confirmation dialog. Click <CANCEL> to return to the previous menu.

4.3. Display Setting

You can configure the display settings regarding the OSD menus, monitor and sequence.

4.3.1. OSD

Configure the settings for the time, title, boundary, icon and language that will be displayed on the screen.

1. From <SYSTEM SETUP> - <DISPLAY>, select <OSD>.

2. Use the [▲▼◀▶]/ENTER] buttons on the remote control or use the mouse to set each option of the OSD item.

! CAMERA TITLE : specify the display of the camera title on the screen.

! RECORDING MODE ICON : specify the display of the record mode icon on the screen.

! AUDIO ICON : specify the display of the audio icon on the screen.

! STATUS BAR ON FULL SCREEN MODE : select to show or hide the status bar in full screen mode.

- AUTO HIDE : place the cursor in the lower area of the screen to display the status bar. If moving the cursor up, the status bar will disappear.

- ALWAYS ON : The status bar will be displayed at all times.

- 5 SEC ~1 MIN : If no mouse movement is detected for from 5 seconds to 1 minute, the status bar will disappear.

! TIMELINE ON FULL SCREEN MODE : select to show or hide the timeline in full screen mode.

- AUTO HIDE : place the cursor in the right corner to display the timeline. If moving the cursor to the left, the timeline will disappear.

- ALWAYS ON : The timeline will be displayed at all times.

- ALWAYS OFF : The timeline will not be displayed.


! BORDER LINE : specify the display of the crossborder between channels in a split mode

! BORDER COLOR : select a color for the border.

! USER NAME : specify the display of the currently logged-in users on the status bar.

! LANGUAGE : select a menu display language.


3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

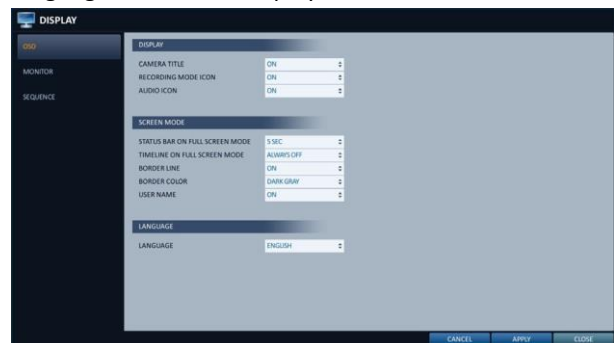

4.3.2. Monitor

If you change from monitoring mode to sequence, you will have to set the interval of the sequence.


1. From <SYSTEM SETUP> - <DISPLAY>, select <MONITOR>.
2. Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to set a sequence interval for auto mode to 1 through 60 seconds.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

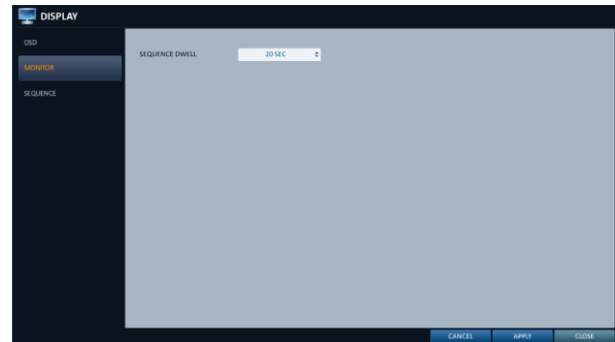

4.3.3. Sequence


Select a split mode for the sequence, and also select a list of active items when the sequence is performed.

1. From <SYSTEM SETUP> - <DISPLAY>, select <SeQuence>.
2. Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to add a sequence or change the settings of the existing sequence.
> ACTIVATION : Select a list that you want to activate the sequence for. Only one list will become active.
> ADD : add a sequence.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [exit] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

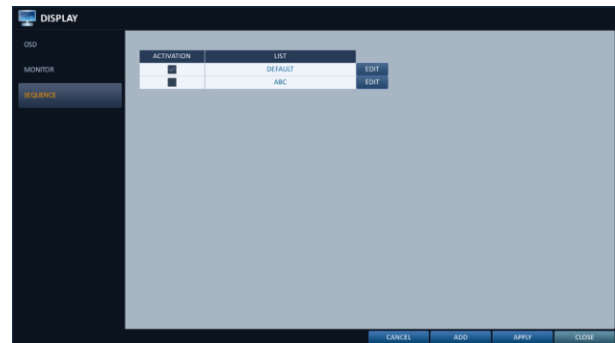

4.3.4. To add a sequence

1. Click <ADD> in the bottom of the screen.
2. When the "ADD" dialog appears, enter a title using the virtual keyboard.
3. Enter the name of the sequence and click <SAVE>.


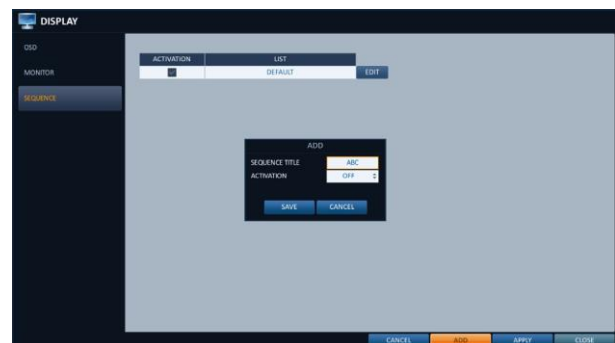


- When the "ADD VIEW TYPE" dialog appears, click <ADD VIEW TYPE>.
 - When the "SEQUENCE SETUP" dialog appears, select a split mode that you want to add from <VIEW TYPE>.
 - If the selected split mode is displayed on "VIEW CONFIGURE", select a channel you want to display in each split screen.
 - Click <CONFIRM>.
 - The set sequence mode is confirmed and will be added to the Add Sequence list in order
 - When done, click <CLOSE> in the bottom of the screen. After the sequence type is saved, you will return to the previous screen.
 - Right-click on the new sequence, or press the [ENTER] button on the remote control to edit or delete it.
- 8CH NVR model support only 1-, 4-, 9-, 6- and 8-split screen modes



4.3.5. To edit a sequence

- Click the <EDIT> button on the right side of listed Sequence to be edited.
- The "EDIT" dialog appears.
- Use the [▲▼◀▶] buttons on the remote control or use the mouse to edit the selected sequence
 - > SEQUENCE TITLE : enter a new sequence name.
 - > ACTIVATION : specify the use of the sequence.
 - > MODIFY : change the settings of the sequence mode.
 - > DELETE : delete the selected sequence list.
 - > CANCEL : cancel the changes.
- Pressing the <MODIFY> button will display the Edit Sequence window.
- To change the existing settings, select a screen mode that you want to edit and right-click to display the context menu. Then, select <MODIFY>.
- When done, click <CLOSE> to close the window.
- To apply your changes, click <APPLY>.

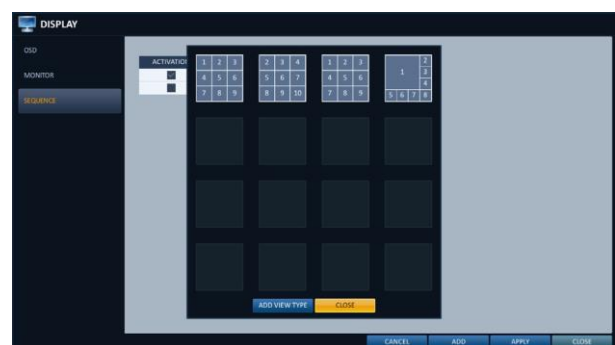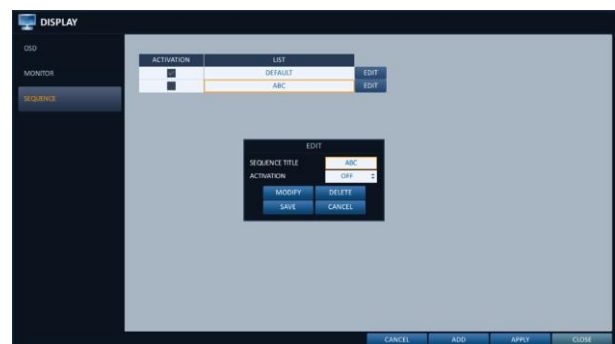


4.4. Audio Setup

You can configure audio and signal beeps.

4.4.1. Audio

You can select the default audio channel and configure network audio transmission


1. From <SYSTEM SETUP> - <AUDIO>, select < AUDIO >.
2. Use the [▲▼◀▶]/ENTER] buttons on the remote control or use the mouse to select an item that you want to edit.
 - > DEFAULT LIVE AUDIO CHANNEL : select an audio channel to monitor on the live screen.
 - > NETWORK AUDIO TRANSMISSION : decide if NVR transfers the audio signal to the remote client.
 - > RECEIVE NETWORK AUDIO : decide if NVR receives the audio signal from the remote client.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [exit] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

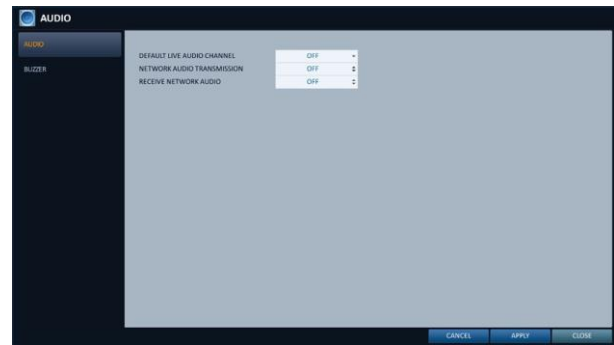

4.4.2. Buzzer output

You can set to output the buzzer if you manipulate the remote control

1. From <SYSTEM SETUP> - <AUDIO>, select <BUZZER>.
2. Use the [▲▼◀▶]/ENTER] buttons on the remote control or use the mouse to select an item that you want to edit.
 - > REMOTE CONTROL : specify the output of a beep when you press a button on the remote control.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

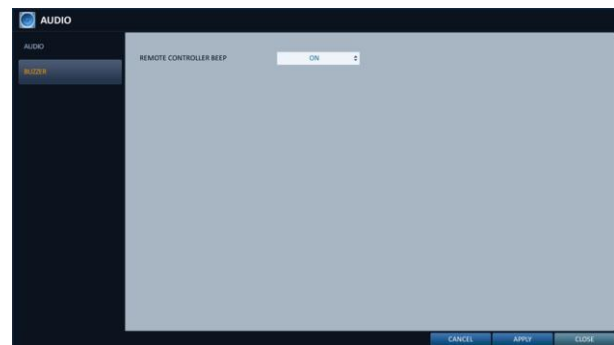


4.5. User Setting

You can configure the settings regarding user management and user and group permissions.

4.5.1. Management


You can add a user account(s) that can be edited at a later time.

1. From <SYSTEM SETUP> - <USER>, select <MANAGEMENT>.
2. Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to add a user account or select an item that you want to edit.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [exit] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

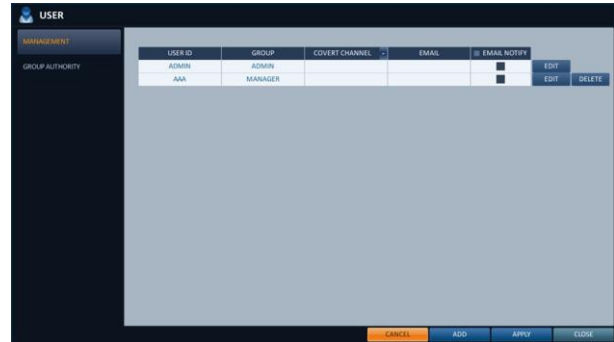


4.5.2. To add a user account

1. Click <ADD> in the bottom of the screen.
2. Use the [▲▼◀▶] buttons on the remote control and move to a desired item. Then, press [ENTER] to select the item.
 - > USER ID : enter the user ID using the virtual keyboard.
 - > PASSWORD : With the virtual keyboard, enter the password.
 - > GROUP : From <ADMIN>, <MANAGER> and <User>, select a group that the user belongs to.
 - > EMAIL : Type in the e-mail address to which you will receive notification of an event if it occurs.
 - > EMAIL NOTIFY : Choose whether you will receive notification of an event if it occurs.
 - > COVERT CHANNEL : You can set the channel to hide from a specific user.
3. When done, click <OK>. The added user account will be listed.

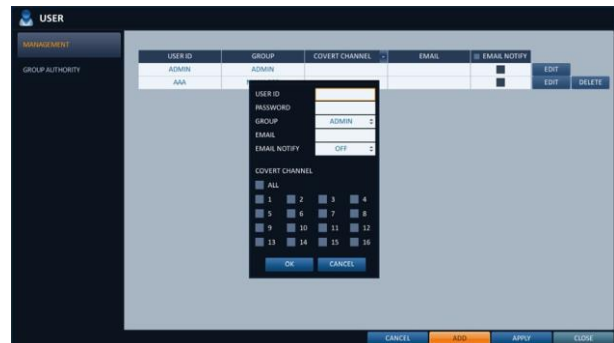

4.5.3. To edit the user account information

1. From the list of users, select a user account to edit and click <EDIT> next to it.
2. From the Edit window, make necessary changes and click <OK>.
3. To delete the user account, click <DELETE>. The <ADMIN> account can not be changed or edited.

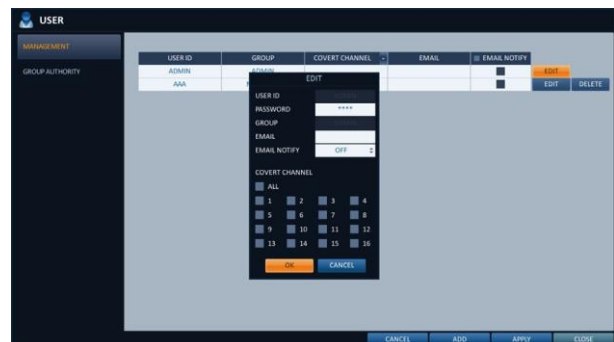

4.5.4. Group Authority

You can grant different user groups different permissions to a specific menu.

1. From <SYSTEM SETUP> - <USER>, select <GROUP AUTHORITY>.
2. Use the [▲▼◀▶/ENTER] buttons or use the mouse to set the permissions for both <MANAGER> and <USER> groups.
 - > SEARCH : Set the permissions for the Search menu.
 - > ARCHIVING : Set the permissions for the Backup menu.
 - > SYSTEM SETUP : Set the permissions for the System Setup menu.
 - > RECORD SETUP : Set the Access Permissions for the Record Setup menu.
 - > EVENT ACTION CONTROL : Set the permissions to output the alarm or control the buzzer if an event such as alarm occurs.
 - > LISTEN TO AUDIO : Set the permission to listen to the audio.
 - > MICROPHONE : Set the permission to speak through the microphone.
 - > REMOTE LOG IN : Set the permission to access remotely.
 - > SHUTDOWN : Set the permission to shut down NVR from the System menu.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.




4.6. Network Setup

Specify the IP address, DDNS, e-mail, network status and network security.

4.6.1. IP Setup

Specify the IP address as well as the remote service port.


- From <SYSTEM SETUP> - <NETWORK>, select <iP Setup>.
- Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to specify each item of the network settings.
 - > DHCP : If it is checked, set the IP address of the NVR to Dynamic IP.
 - If the <dhcp> item is checked, the sub items of IP address, gateway, subnet mask, primary DNS server, secondary DNS server will be filled in automatically.
 - ! If you select to obtain an IP address from the <DHCP> server, when the lease time of the DHCP server expires, you will lose connection to the IP camera momentarily while the network settings will be updated. However, the network connection will be restored soon. It is recommended to use a fixed IP for stable network connection.
 - > RENEW : The network server restarts and re-allocates dynamic IP address.
 - > IP ADDRESS : Provide the IP address.
 - > GATEWAY : provide the gateway address.
 - > SUBNET MASK : provide the subnet mask address.
 - > 1ST DNS SERVER : enter the address of the primary DNS server.
 - > 2ST DNS SERVER : enter the address of the primary DNS server.
 - > RTSP SERVICE PORT : port number that the remote client receives the NVR video from.
 - > WEB SERVICE PORT : port number used for connecting to the NVR with the web browser.
 - > PORT FORWARDING : If you are using a router, you can set the port forwarding so that external access to the NVR is enabled. If the router does not support the uPnP protocol, you must set the port forwarding manually. For more information, contact your network administrator.
 - > DELETE PORT : release the port forwarding settings for the router.
 - > MAX TX SPEED : limit the network transfer rate to access a remote client. The video signal may be transferred at a less rate than specified, which depends on the status of your network connection.
- To apply the change, click <APPLY> in the bottom of the screen.
- When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

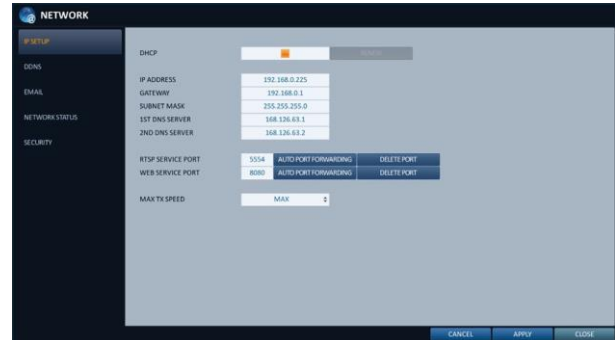

4.6.2. DDNS

You can configure the DDNS settings so that remote users who are connected to the network can access remotely. DDNS is an IP redirection service in a dynamic IP environment that redirects (maps) the new IP address to a registered domain name each time the IP address is changed.


1. From <SYSTEM SETUP> - <NETWORK>, select <DDNS>.
2. Use the [▲▼◀▶]/ENTER buttons on the remote control or use the mouse to specify the use of DDNS and select a server.
 - > DDNS : Specify the use of DDNS connection.
 - > DDNS SERVER : Select a server to connect to.
 - > NVR NAME : Enter the name of the NVR that you want to use as DDNS.
 - > DDNS REGISTRATION TEST : Check if the <NVR NAME> can be set as DDNS. If there is a duplicate name in the server, the registration will fail. If this is the case, rename the < NVR NAME > and press Test to check if it works properly.
 - > USER NAME : Use this field only if you set DDNS server to dyndns.org.
 - > PASSWORD : Use this field only if you set DDNS server to dyndns.org.
 - > NVR ADDRESS : Provide the <NVR NAME> and press the <DDNS REGISTRATION TEST> button. The name will be added automatically.
 - > DDNS CONNECTION TEST : Perform the connection test to check if DDNS is normally registered.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [exit] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

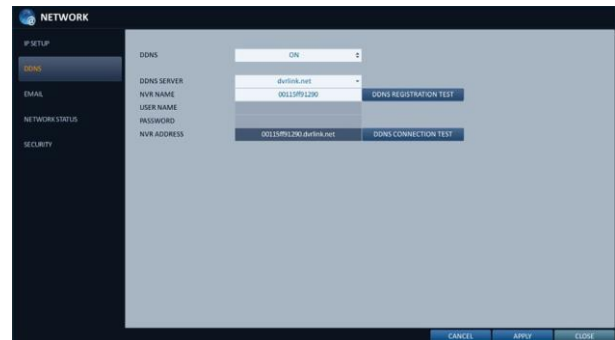

4.6.3. Email

You can register and test an email address so that an email notification is delivered at a specific interval or if an event occurs.

1. From <SYSTEM SETUP> - <NETWORK>, select <EMAIL>.
2. Use the [▲▼◀▶]/ENTER buttons on the remote control or use the mouse to specify the use of email and select a server.
 - > SERVER : Set up the mail server. Set the mail server that will be used for notification to the NVR. Use the virtual keyboard to enter your mail server.
 - > PORT : Enter the mail server port.
 - > SECURITY : If it is set to <ON>, the email will be transferred in secure mode. If it is set to <OFF>, the email will be transferred to a server that does not support SSL.
 - > USER : Provide the email account (ID) of the sender.
 - > PASSWORD : Provide the password of the sender.

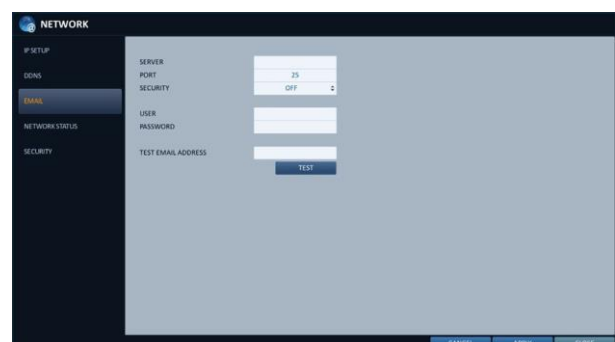

- > TEST EMAIL ADDRESS : Enter an email address for the test purpose.
- > TEST : Send a test email and check if the test email is delivered normally.
- 3. To apply the change, click <APPLY> in the bottom of the screen.
- 4. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

4.6.4. Network Status

From the network map screen, you can check the internet connection status and IP camera connection status, and check also the details of the connection status for each camera.

1. From <SYSTEM SETUP> - <NETWORK>, select <NETWORK STATUS>.
2. Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to select one between <NETWORK MAP> and <DETAIL STATUS>.
3. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

4.6.5. Network Map

- > IP ADDRESS : Indicates the internal IP address of the NVR.
- > MAC ADDRESS : Indicates the internal MAC address of the NVR.
- > DDNS ADDRESS : Indicates the internal DDNS address of the NVR.
- > RTSP SERVICE PORT : Indicates the network port of the video service. For remote service, the router must have set up the port forwarding.
- > WEB SERVICE PORT : Indicates the webservice network port. For the remote service to be enabled, the corresponding port of the router should have set up the port forwarding.
- > DDNS UPDATE STATUS : Shows if the DDNS address was registered to the DDNS server normally. Press < 🔄 > to try to register the DDNS address forcibly
- > EXTERNAL IP ADDRESS : Indicate the IP address for the Internet, accessible from the NVR. The NVR can be granted access with the web browser at "http://<external IP address>:<web Service Port>". The IP address can vary in a dynamic IP environment.
- > CONNECTED CLIENTS : Shows the list of clients that are currently connected. Press < > to terminate the connection of an unwanted client forcibly.

Termination is limited to only users in a lower group than the current user.

! The current PoE power consumption is updated sequentially in the order of channel.

! Alarm is generated if power consumption reaches 90% of rated supply capacity, for both NVR main unit and external PoE Hub. This alarm threshold setting can be edited in "EVENT > SYSTEM EVENT > POE FAIL EVENT".




4.6.6. **Detail Status**

You can check the details of the cameras that are connected to each channel.

Click < > in the right area of the list to show the details.

Click <RESET> in the "IP CAMERA CONFIGURATION" window to reset the IP camera.

When the IP camera settings are complete, click <OK>.

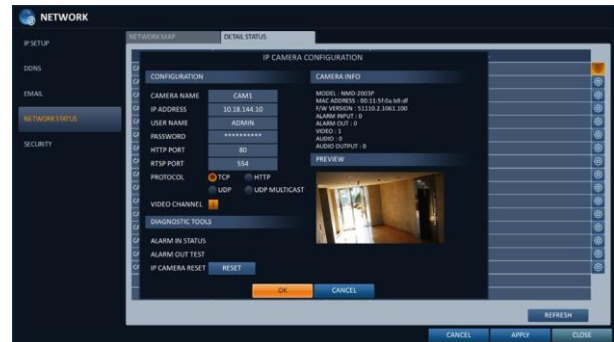


4.6.7. **Security**

For security purpose, you can set whether to use encryption and its method, and configure IP filtering.

1. From <SYSTEM SETUP> - <NETWORK>, select <SECURITY>.
2. Use the [▲▼◀▶]/ENTER buttons on the remote control or use the mouse to select one between <ENCRYPTION> and <IP Filter>.
3. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.


4.6.8. **ENCRYPTION**

- › RTSP ENCRYPTION ENABLE : Set whether to apply RTSP encryption or not.
- › RTSP ENCRYPTION METHOD : Select the encryption method.
- › HTTPS ENABLE : Set whether to use HTTPS encryption or not.
- › HTTP AUTHENTICATION METHOD : Select the authentication method for encrypted communication.

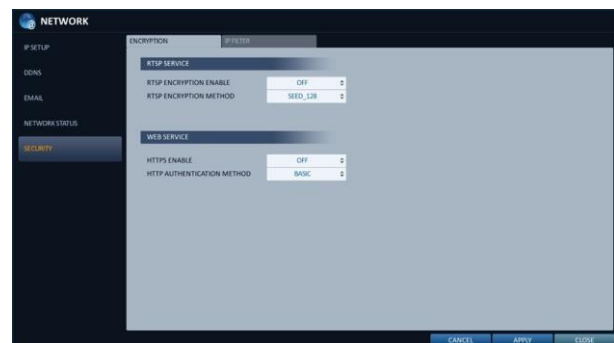

4.6.9. **IP FILTER**

- › IP FILTER ENABLE : Set whether to apply IP filter or not.
- › IP FILTER RULE : You can set to allow or deny IP addresses listed in the IP filter.
- › ADD : Click the button to add an IP address to be filtered, if IP filtering is enabled.

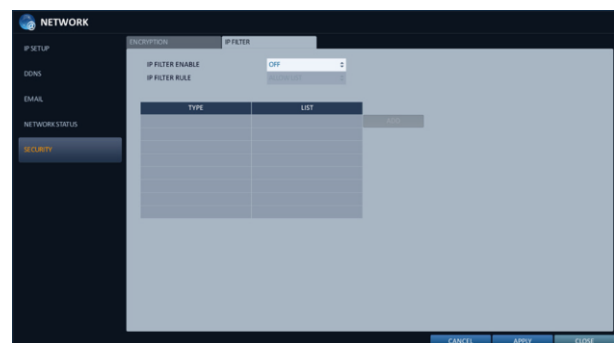





4.7. System Setting

You can configure the settings of date/time, system management, control device and system security.

4.7.1. Date/Time

Specify the current date and time.



- From <SYSTEM SETUP> - <SYSTEM>, select <DATE/TIME>.
- Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to change the time or set the options as necessary.
 - > DATE/TIME : Set the current time and date. Click<  > to adjust the time manually.
 - > DATE FORMAT : specify the date format.
 - > TIME FORMAT : specify the time format.
 - > TIME SERVER : obtain the current time from the time server. Click <  > to get the current time.
 - > AUTO TIME SYNC : automatically synchronize the time with the time server at a specific time.
 - > SYNC AT : Set the time to sync with the time server.
 - > TIMEZONE : specify the GMT standard time for your local area.
 - > DST : You can set up or release the DST (Daylight Saving Time).
- To apply the change, click <APPLY> in the bottom of the screen.
- When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

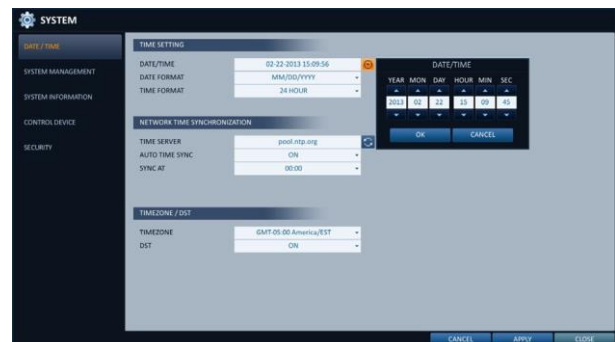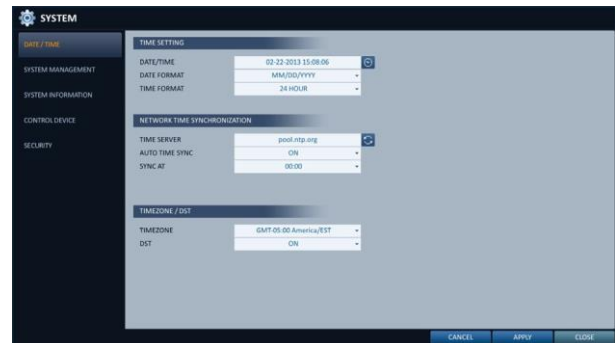

4.7.2. System Management

You can check, update or reset the system information.




- From <SYSTEM SETUP> - <SYSTEM>, select <SYSTEM MANAGEMENT>.
- Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to set each option of the system management.
 - > FW UPDATE : you can update the current software with the latest version.
 - > FACTORY DEFAULT : Return the NVR settings to the factory default.
 - > SYSTEM DATA : Save the system settings or get the system information from other device.
 - SAVE : Store the NVR settings to a storage device. Connect the storage device to the USB port of NVR.
 - LOAD : Apply the settings of the storage device to the NVR. Connect the storage device to the USB port of NVR.

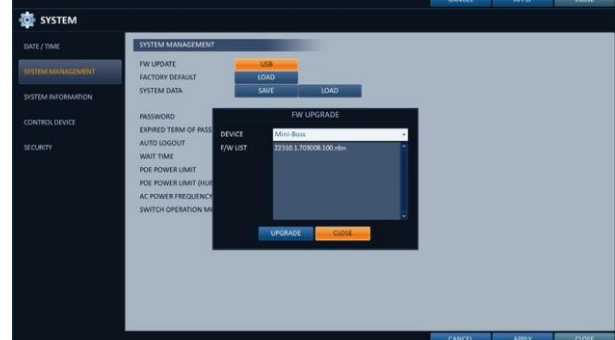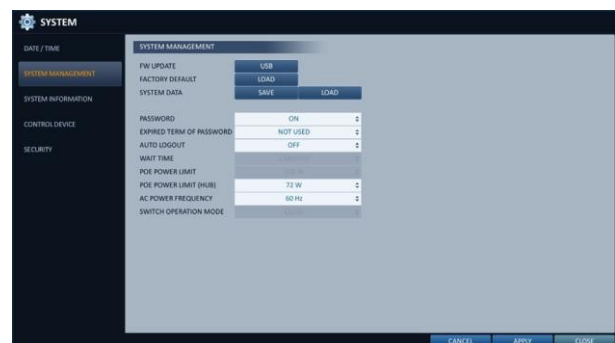

- › **PASSWORD** : Open or close the dialog box for settings of the menus: quit, system settings, record settings, backup, and search.
! If it is set to <OFF>, note that the ADMIN account is only effective and access to all menus will be restricted.
 - › **EXPIRED TERM OF PASSWORD** : You will be prompted to change the current password after a certain period of time.
 - › **AUTO LOGOUT** : If there is no user input for a certain period of time, you can set to log out automatically.
 - › **WAIT TIME** : Specify the waiting time for Auto Logout.
 - › **PoE POWER LIMIT (HUB)** : Sets the nominal power consumption of the external PoE device's power adaptor.
 - › **AC POWER FREQUENCY** : Set to the actual AC power's frequency (50Hz / 60Hz) applied to NVR to avoid flickering.
 - › **SWITCH OPERATION MODE** : Sets the network connection method of the IP camera. (To be implemented)
3. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

4.7.3. To perform the upgrade

1. Connect the USB storage device that contains the updatable files.
2. Click <USB>.
3. Select one(s) from the updatable files listed in <F/W LIST>.
Firmware should be located in the <root> directory of the USB storage device. Do not place it under a certain folder.
4. Click <UPGRADE>.
5. When the confirmation message appears, click <OK>.
6. The progress bar displays the progress of the firmware upgrade process.
7. When the upgrade is complete, reboot the system.
! During the updating, never turn off the NVR forcibly or disconnect the USB storage device to avoid serious damage to the product or data. If required, consult your nearest service center for professional assistance.

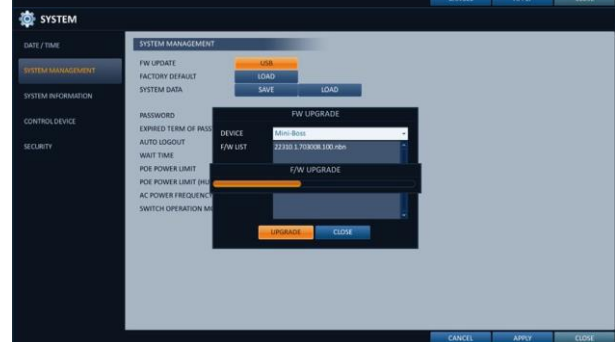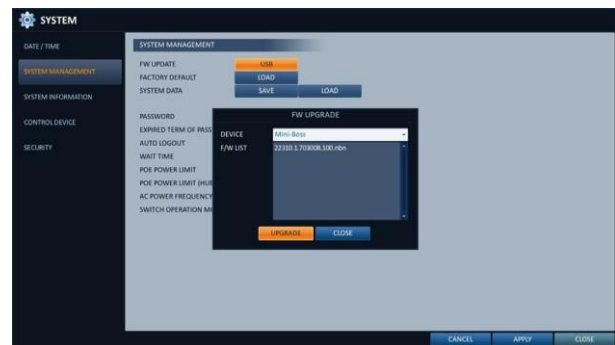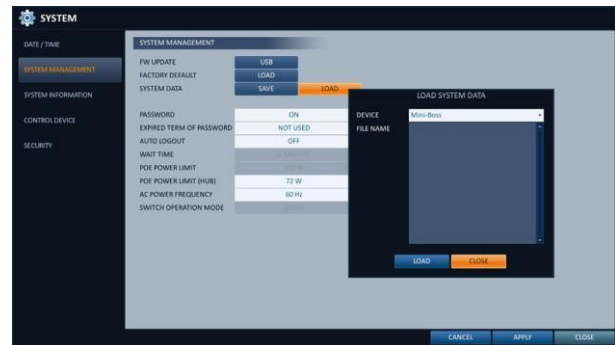

4.7.4. System information

You can check the current system version and system-related settings.


1. From <SYSTEM SETUP> - <SYSTEM>, select <SYSTEM INFORMATION>.
2. Check the status of the current system.
3. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.



4.7.5. Control Device

Configure the settings of the remote control and keyboard controller.


1. From <SYSTEM SETUP> - <SYSTEM>, select <CONTROL DEVICE>.
2. Use the [▲▼◀▶]/ENTER buttons on the remote control or use the mouse to set the connection options for the control device.
 - > SYSTEM ID : Set the ID of the NVR so that the keyboard controller can identify.
 - > PROTOCOL : Set up the protocol of the keyboard controller.
 - > BAUD RATE : Set the data transmission speed.
 - > REMOTE CONTROLLER ID : Set the ID of the remote control.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [exit] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

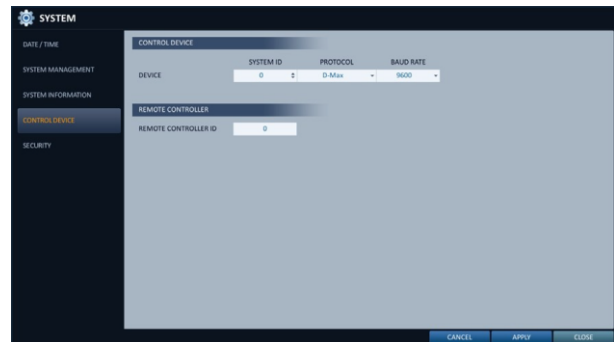

4.7.6. Security

For security, you can set to apply reinforced password policy (to system, search/backup) and control accessing audio and snapshot.

1. From <SYSTEM SETUP> - <SYSTEM>, select <SECURITY>.
2. Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to set each option of security.
 - › AUDIO SUPPORT : Allows audio function. If set to <OFF>, all audio functions are disabled. Live and playback screen do not produce audio, and no audio recording is allowed.
! Note that changing the setting from <Off> to <ON> initializes audio related settings. Hence, reconfiguration is required after enabling.
 - › SNAPSHOT SUPPORT : Allows snapshot function.
If set to <OFF>, all capturing functions are disabled. User cannot take a snapshot on the Live screen, playback screen, and backup player screen.
Event notification with e-mail will not include event snapshot too.
! Note that changing the setting from <OFF> to <ON> initializes snapshot related settings. Hence, reconfiguration is required after enabling.
 - › ENHANCED PASSWORD RULE : Sets whether to apply strong password policy, which prevents using too easy password.
 - › PASSWORD CHECK WHEN SEARCH/BACKUP : Sets whether to ask password when attempted search/backup. Set to <ON> to ask password when accessing backup menu. Using <EXPORT> on the timeline will ask password, too.
3. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

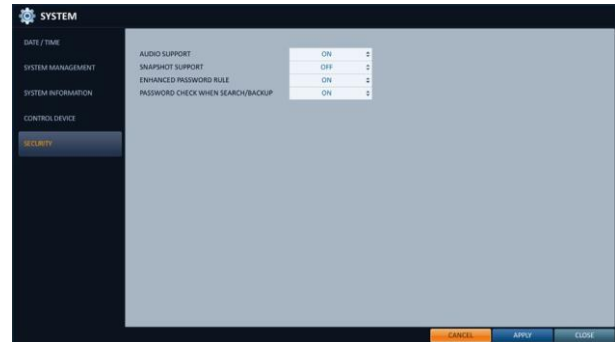



4.8. Storage

You can configure the settings of and view information of the disk and external storage device.

4.8.1. Disk Information

It will show information about the connected disk

- From <SYSTEM SETUP> - <STORAGE>, select <DISK INFORMATION>.
- Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to select either <INTERNAL DISKS> or <EXTERNAL STORAGE>.
 - Please check the status for each connected device.
 - START / END TIME : show the start time and end time of data stored in each disk.
 - STATUS : check if the connected disk is being used by the NVR. If you encounter a problem with the disk, the NVR will terminate the connection to the disk and mark it as 'Not In Use'.
 - CAPACITY : show the capacity of the disk.
 - MODEL : indicate the disk model.
 - S.M.A.R.T STATUS : Read the S.M.A.R.T information of the disk and check to display if the current disk is in normal operation.
 - NORMAL : The disk is in a normal state.
 - CHECK : The disk has an error so that you need to check the disk or the connection cables of the disk. If you leave the problem unresolved, no recording may be enabled. So it is recommended that you replace the disk immediately.
 - ERROR : The disk fails or is unable to use due to an error of the disk or the cable. The disk should be replaced immediately. Contact the retailer or the customer service to replace the disk.
- When done, press the [exit] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

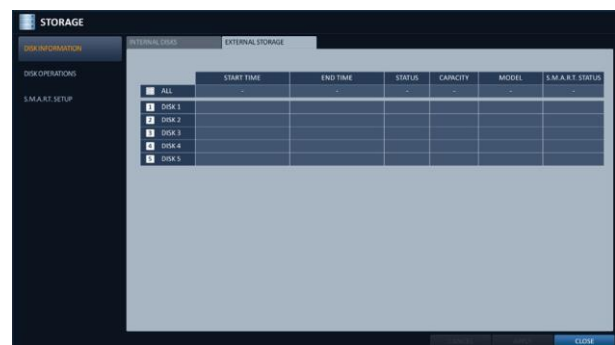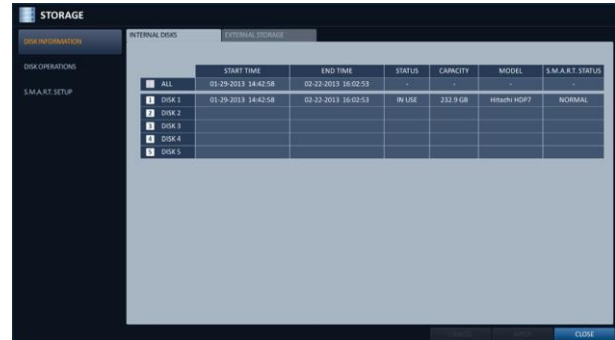

4.8.2. Disk Operations

- From <SYSTEM SETUP> - <STORAGE>, select <DISK OPERATIONS>.
- Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to set the operation conditions of the disk.
 - > DISK WRITE MODE
 - If it is set to <OVERWRITE>, the existing data will be overwritten by new recording data if the recording data size exceeds the free space of the HDD.
 - If the option is set to <ONCE> and the HDD is full, the NVR will stop recording and output the beep or alarm that is pre-defined at <event>.
 - > RECORDING TIME LIMIT : The recording data will be deleted after a specific time of reservation. If it is set to




<OFF>, this function will be disabled.

> DISK FORMAT : format the hard disk.

! Note that formatting the HDD will delete all video data and logs.

4. ERASE VIDEO : You can delete all or part of stored video. Click <ERASE> to move to "ERASE VIDEO" menu. Set the beginning and ending time and click <ERASE> button to delete video of selected time range.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

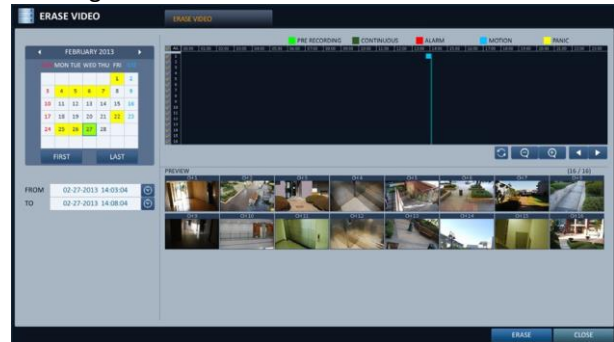



4.8.3. S.M.A.R.T settings

You can check the S.M.A.R.T information of the disk and specify the check frequency.

- What is S.M.A.R.T information?

S.M.A.R.T (Self-Monitoring, Analysis and Report Technology) is to detect a HDD that is likely to cause a problem in the future with a warning message.

1. From <SYSTEM SETUP> - <STORAGE>, select <S.M.A.R.T. SETUP>.
2. Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to check the S.M.A.R.T operation and specify the check interval.
 - > S.M.A.R.T STATUS : Read the S.M.A.R.T information of the disk and check to display if the current disk is in normal operation. Click <DETAIL INFO> to view the details.
 - NORMAL : The disk is in a normal state.
 - CHECK : The disk has an error so that you need to check the disk or the connection cables of the disk. If you leave the problem unresolved, no recording may be enabled. So it is recommended that you replace the disk immediately.
 - ERROR : The disk fails or is unable to use due to an error of the disk or the cable. The disk should be replaced immediately. Contact the retailer or the customer service to replace the disk.
 - > S.M.A.R.T CHECK INTERVAL : Specify the S.M.A.R.T check interval. Click <CHECK NOW> to start checking.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

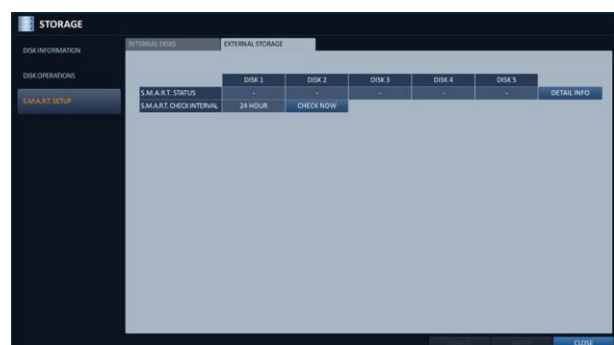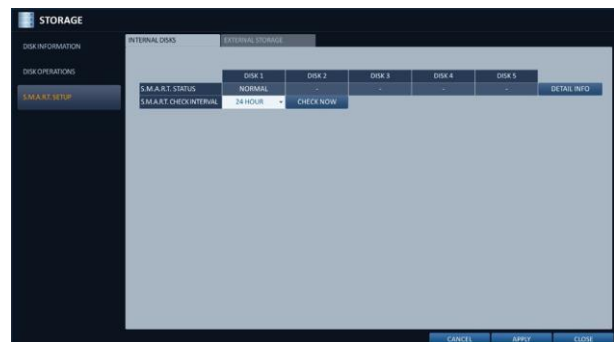

4.9. Event Setup

Define various events, and specify the conditions to notify the user in various ways.

4.9.1. Alarm Out

Specify the alarm output conditions with the work schedule.

- From <SYSTEM SETUP> - <EVENT>, select <ALARM OUT>.
- Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to select <ALARM OUT> and configure the related settings.
 - > NAME : You can rename the alarm.
 - > OPERATION : Set the alarm output mode.
 - N/O (Normal Open) : It normally stays Open. However, if an event occurs, it will switch to Close.
 - N/C (Normal Close) : It normally stays Close. However, if an event occurs, it will switch to Open.
 - > DURATION : Specify the duration of the alarm output.
 - TRANSPARENT : Keep the alarm out for as much time as the event lasts.
 - UNTIL KEY : Keep the alarm out until a mouse or remote control button is pressed.
 - 5 ~ 300 SEC : Keep the alarm out for as long as specified.
 - > TEST : Forcibly output the alarm for the test purpose.
- To apply the change, click <APPLY> in the bottom of the screen.
- When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.




4.9.2. ON/OFF Schedule

You can activate or turn off the alarm output as scheduled.

- Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to select a <DATE> for the schedule.
- Drag the mouse to resize the cell or use the on the [▲▼◀▶] buttons to move to the cell, then press [ENTER].
- Select a desired alarm output mode.
 - > ON : The alarm output is always turned on.
 - > OFF : The alarm output is always turned off.
 - > EVENT : Trigger the alarm output in sync with the event.
- Click <COPY SCHEDULE TO> to check the checkbox of the date that you want to copy the schedule at.
- When done, click <OK> to apply the settings.
- To apply the change, click <APPLY> in the bottom of the screen.
- When done, press the [EXIT] button on the remote



control or click <CLOSE> in the lower screen to return to the previous menu.

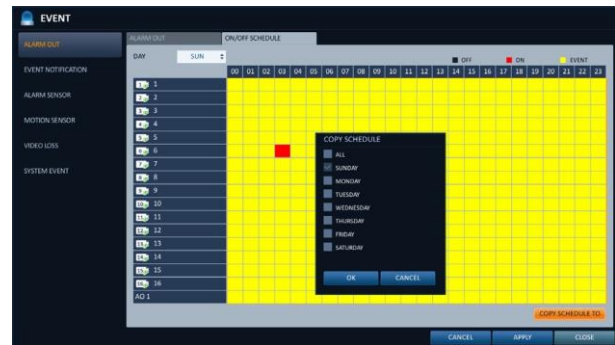

4.9.3. Event Notification


Specify the methods of notification such as buzzer, video popup, email or FTP if an event occurs.

1. From <SYSTEM SETUP> - <EVENT>, select <event notification>.
2. Use the [▲▼◀▶] buttons on the remote control or use the mouse to select one from <BUZZER>, <DISPLAY>, <EMAIL> and <FTP>.
3. Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to set the output method and duration.
4. To apply the change, click <APPLY> in the bottom of the screen.
5. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

4.9.4. Buzzer output

You can notify the user of the event using the buzzer.

5. DURATION
 - TRANSPARENT : Keep the buzzer out for as much time as the event lasts.
 - UNTIL KEY : Keep the buzzer out until a mouse or remote control button is pressed.
 - 5 ~ 300 SEC : Keep the buzzer out for as long as specified.

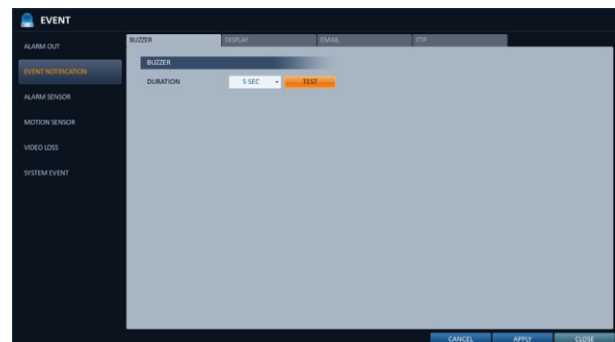

4.9.5. Display

If an event occurs, you can display the video screen or a popup message to notify the user of the event.

6. VIDEO POPUP : Display the video channel that is synchronized with the event on a single split screen. Set the DURATION of the single split screen.
 - UNTIL KEY : Keep the video popup displayed until a mouse or remote control button is pressed.
 - 5 ~ 300 SEC : Keep the video popup displayed for as long as specified.

! If multiple events occur at the same time, or if multiple eventrelated video channels exist, the video popup will be displayed in the maximum split screen mode rather than the single split screen mode.



7. **OSD POPUP** : This will notify the user of the event with a popup message if an OSD popup event occurs. You can adjust the duration of the popup message.
 - UNTIL KEY : Keep the OSD popup displayed until a mouse or remote control button is pressed.
 - 5 ~ 300 SEC : Keep the OSD popup displayed for as long as specified.

4.9.6. Email

If an event occurs, this will notify registered users of the event by email. If you do not want to receive the email, uncheck the <EMAIL NOTIFY> option in <MANAGEMENT>.

› ADD NEW EMAIL


If you want to add a new mail recipient beside the existing ones, click <EDIT> to add the recipient.

› MINIMUM EMAIL FREQUENCY

Adjust the minimum frequency of sending the email. For example, even if you have set the minimum frequency to one minute and another event occurs in less than one minute after the last email sending, the email for the new event will be sent one minute after.

! Some email servers can block the email sending if the email delivery cycle is too short, and classify it as spam. Contact your email service provider to adjust the Minimum delivery cycle so that the server does not classify the email as spam.

- ##### › INCLUDE SNAPSHOT IMAGE
- : Set whether to include snapshot image of the event with the notification.

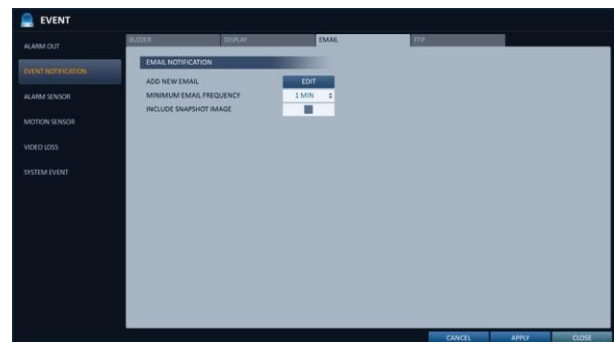

4.9.7. FTP

Upon events, uploads event notification onto the added FTP server.

- ##### › FTP SERVER
- : Enter the FTP server address for event transfer.

- ##### › DIRECTORY
- : Select or manually enter the destination folder of the FTP for event transfer.

- ##### › FILE NAME
- : Select the uploading event file's format or manually set the file name.

- ##### › MINIMUM FREQUENCY
- : Sets the minimum recurrence delay for uploading event notification onto the FTP server.

For example, when the minimum recurrence is set to 1 minute, the next FTP event notification will be uploaded after 1 minute from the last event, even if another event is detected within 1 minute from the last one.

- ##### › INCLUDE WEBRA LINK
- : Select whether to include WEBRA link address of the event generating NVR, which can be accessed with web browser (Internet Explorer).

! Check to play back the event footage.


- ##### › INCLUDE SNAPSHOT IMAGE
- : Set whether to include snapshot (still image) or not.



4.9.8. Alarm Sensor

You can configure the settings of the alarm sensor and specify the operation of the sensor if an event occurs.

- From <SYSTEM SETUP> - <EVENT>, select <ALARM SENSOR>.
- Use the [▲▼◀▶] buttons on the remote control or use the mouse to specify the sensor input method and operation.
 - NAME : You can specify the name of the alarm sensor.
 - OPERATION : You can specify the type of the alarm sensor.
 - N/O (Normal Open) : Normally the sensor is left Open. If the sensor switches to Close, an event will be triggered.
 - N/C (Normal Close) : Normally the sensor is left Close. If the sensor switches to Open, an event will be triggered.
 - LINKED CAMERA : Set the camera to sync with the alarm sensor if it is triggered. If you have set the alarm recording and the sensor detects the recording, all synchronized cameras will start alarm recording
 - ALARM OUTPUT : Specify the alarm output channel if it is detected by the alarm sensor. The alarm will be output to the specified channel.
 - PRESET : On alarm sensor's detections, the camera moves as defined by the selected preset.
 - BUZZER : Specify the output of the buzzer if an alarm is detected by the alarm sensor.
 - VIDEO POPUP : Select to display the video popup if an alarm is detected by the alarm sensor. If there exist multiple <LINKED CAMERA>, the video popup will be displayed in the maximum split mode.
 - OSD POPUP : Select to display the OSD popup message if it is detected by the alarm sensor.
 - EMAIL : Select to send an email if detected by the alarm sensor.
 - FTP : Select whether to upload event notification onto the FTP upon detected alarm event.
- To apply the change, click <APPLY> in the bottom of the screen.
- When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

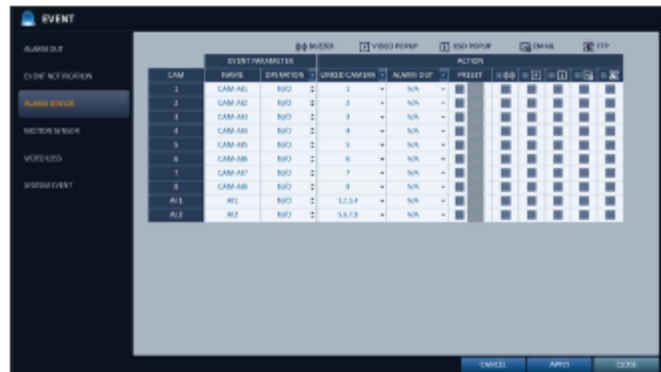

4.9.9. Motion Sensor

You can set an action to execute when a motion is detected.

For the settings of the motion sensor, move to <CAMERA SETUP>.

- From <SYSTEM SETUP> - <EVENT>, select <MOTION SENSOR>.
- Use the [▲▼◀▶] buttons on the remote control or use the mouse to specify the ignorance interval and operation.
 - IGNORING INTERVAL : Specify the minimum interval of the motion event occurrence. For example, even if you have set the minimum frequency to 5 seconds and another motion event occurs in less than 5 seconds after the last motion event occurred, the new event will be ignored. If too many motion events occur, adjust to shorten the interval.



! Motion recording will be triggered immediately after the motion occurred regardless of the above settings.

- ALARM OUTPUT : Specify the alarm output channel if a motion is detected by the motion sensor.
 - PRESET : On motion sensor's detections, the camera moves as defined by the selected preset.
 - BUZZER : Specify the output of the buzzer if a motion is detected by the motion sensor.
 - VIDEO POPUP : Select to display the video popup if a motion is detected by the motion sensor.
 - EMAIL : Select to send an email if a motion is detected by the motion sensor.
 - FTP : Select whether to upload event notification onto the FTP upon detected motion event.
- To apply the change, click <APPLY> in the bottom of the screen.
 - When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

4.9.10. Video Loss

You can specify a reaction to the case where no video is received from the camera

- From <SYSTEM SETUP> - <EVENT>, select <VIDEO LOSS>.
- Use the [▲▼◀▶] buttons on the remote control or use the mouse to specify the reaction to a video loss
 - ALARM OUTPUT : Specify the alarm output channel if a video loss occurs.
 - PRESET : On video loss's detections, the camera moves as defined by the selected preset.
 - BUZZER : Specify the output of the buzzer if a video loss occurs.
 - EMAIL : Select to send an email if a video loss occurs.
 - FTP : Select whether to upload event notification onto the FTP upon detected video loss event.
- To apply the change, click <APPLY> in the bottom of the screen.
- When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.



4.9.11. **System Event**


You can set event actions for disk, recording, network and system events. As same to setting event actions for normal events, you can set to trigger alarm output, buzzer, display on-screen pop-up, or send event notification via email and FTP.

1. From <SYSTEM SETUP> - <EVENT>, select <SYSTEM EVENT>.
2. Use the [▲▼◀▶] buttons on the remote control or use the mouse to specify the reaction to each event.
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

4.9.12. **Disk**


- › **OVERWRITE START EVENT** : if you set the disk write mode to <OVERWRITE>, this event occurs when the disk is full and the overwriting begins accordingly.
- › **DISK FULL EVENT** : if you set the disk write mode to <ONCE>, this event occurs when the disk is full (100%).
- › **DISK SPACE EXHAUSTED EVENT** : Event that is triggered if the disk is almost full. Click to specify the threshold percentage of usage to trigger the event.
- › **S.M.A.R.T EVENT** : Occurs if the disk causes the S.M.A.R.T error.
- › **NO DISK EVENT** : Occurs if no disk is recognized after the booting due to a disk failure or cable problem.

! To detect the disk error, it is recommended not to change the settings of the S.M.A.R.T event, no disk event and buzzer output.

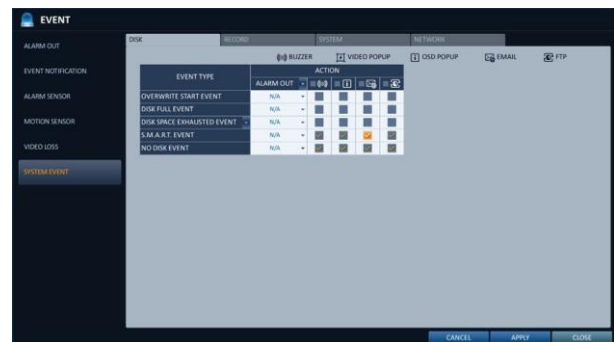


4.9.13. **Record**

- › **PANIC RECORD START EVENT** : Specify the action to perform when the panic recording begins.

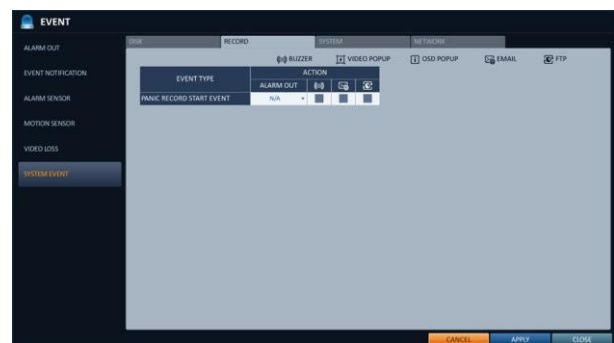

4.9.14. System

- › BOOTING EVENT: This event occurs when the NVR is booting.
- › LOGIN FAIL EVENT: This event occurs when the NVR fails to log in. You can specify the times of clicking <  > to trigger the event.
- › FAN FAIL EVENT : This event occurs if the CPU cooling fan or unit's cooling fan does not work at all.


! If the fan fails, no recording will proceed by the NVR. If you encounter a fan failure, contact the retailer or the service center for technical assistance.

- › TEMPERATURE FAIL EVENT : This event occurs if the internal temperature of the NVR exceeds the effective range. Then, the NVR will not operate normally. If this is the case, check the followings and take a necessary measure.
 - Check if the ventilation of the NVR is clogged with foreign substances. If so, remove them.
 - Keep the NVR away from a heat source such as heater. Install it in a flat, lower area with good ventilation.
 - If the problem persists, contact the retailer or service center.
- › POE FAIL EVENT : This event occurs if power consumption reaches specified level of power supply capacity of NVR and external PoE Hub.

! To monitor the normal operation of the NVR, it is recommended not to change the buzzer output settings of the fan failure event and the temperature fail event.




4.9.15. Network

- › TROUBLE IN INTERNET CONNECTION : Occurs if the Internet connection to the NVR fails. If you do not want to connect the NVR to the network, leave the <ACTION> item blank.
- › FAIL IN REMOTE LOGIN : This event occurs if a remote client fails to log in due to an invalid ID or password. You can specify the times of clicking <  > to trigger the event.
- › FAIL IN DDNS UPDATE : This event occurs if the NVR tried to update the DDNS address but failed.

! If the DDNS address fails to be updated, the NVR may not connect to a remote client. If this is the case, enter the IP address from the client side to allow access from the NVR. This is just a temporary measure. For the IP address, move to and check <EXTERNAL IP ADDRESS> from the <NETWORK> window. Note that the <EXTERNAL IP ADDRESS> is subject to change if the NVR does not use the static IP.

! Note that the <EXTERNAL IP ADDRESS> can change at any time in a dynamic IP environment.

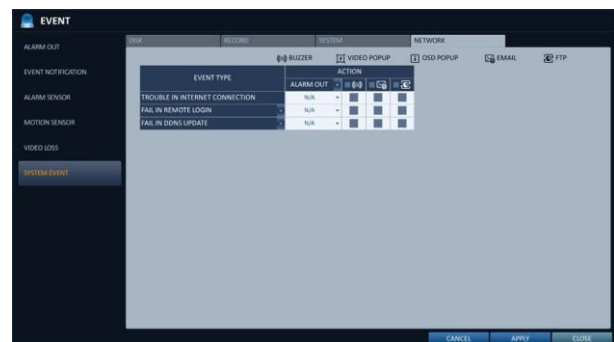


5. Record Setting


You can configure the record settings for the NVR. Only authorized users can access the Record Setup menu.

5.1. To start the Record Setup menu

How to use the mouse

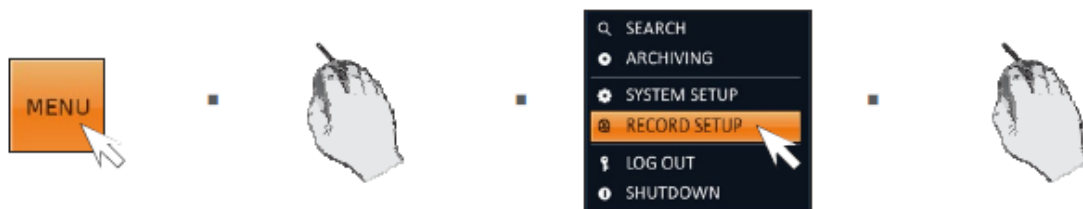

How to use the remote control

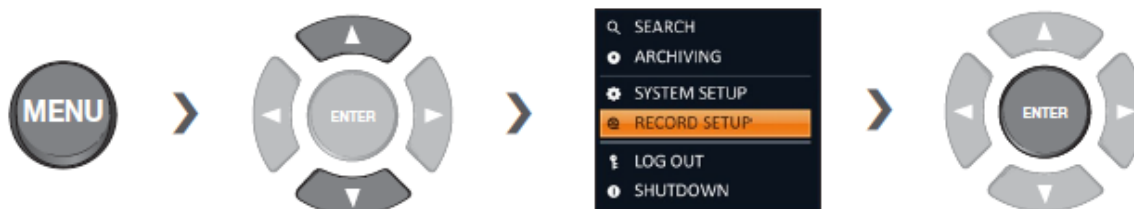

5.2. Record Setup

5.2.1. operation Mode


You can set the recording options for Auto or Manual mode.

1. From <RECORD SETUP> menu, select <OPERATION MODE>.
2. Use the [▲▼◀▶] buttons or use the mouse to set <RECORDING CONFIGURATION MODE> to <AUTO CONFIGURATION> or <MANUAL CONFIGURATION>.
3. Set the recording options for each selected Record mode.
4. To apply the change, click <APPLY> in the bottom of the screen.
5. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

5.2.2. Auto configuration

If you choose your preferred record mode, the NVR will recommend you the optimized settings for the selected record mode.


- › CONTINUOUS RECORD : Records always regardless of events.
 - LONG DURATION BUT LOW QUALITY : Recording will proceed in the low quality at all times. As this option will always make recording in the low quality, the recording period is the longest compared to the other record modes.
 - HIGH QUALITY BUT SHORT DURATION : Recording will proceed in the best quality at all times. As this option will always make recording in the best quality, the recording period is the shortest compared to the other record modes.
- › MOTION RECORD : Recording will proceed only if a motion is detected.
- › ALARM RECORD : Recording will proceed only if an alarm event occurs.
- › MOTION/ALARM RECORD : Recording will proceed only if a motion is detected or an alarm event occurs.
- › INTENSIVE MOTION RECORD : Normally recording will be performed in a low quality. However, the quality will switch to high if a motion is detected.
- › INTENSIVE ALARM RECORD : Normally recording will be performed in a low quality. However, the quality will switch to high if an alarm event occurs.
- › INTENSIVE MOTION/ALARM RECORD : Normally recording will be performed in a low quality. However, the quality will switch to high if an alarm event occurs or a motion is detected.

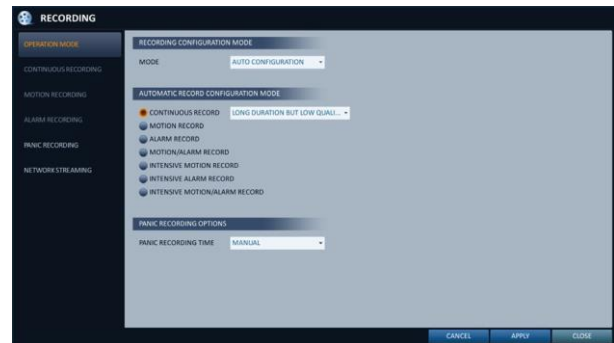

5.2.3. Manual configuration

If you set the record mode to <Manual configuration>, the manual configuration window will appear where you can set the manual recording and panic recording options.

- › MANUAL CONFIGURATION OPTIONS : You can configure the recording settings by the time, date, and channel.
 - SCHEDULE MODE : You can schedule your recording with time range or combining time with selected week days.
 - PRE RECORDING TIME : Set the pre-recording time.
 - POST RECORDING TIME : Set the post-recording time.
- › PANIC RECORDING OPTIONS : Set the panic recording duration. If it is set to <MANUAL>, recording will continue until you turn it off Manually.

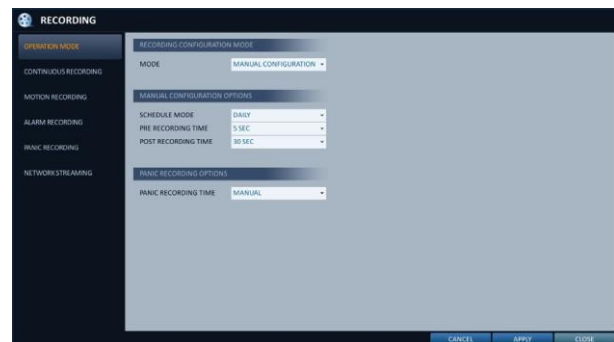

5.2.4. Continuous Recording

You can configure the settings of: continuous recording time, recording size, frame rate per second and quality.

1. From the <RECORD SETUP> menu, select <CONTINUOUS RECORDING>.
 - ! From <OPERATION MODE>, you must set <RECORDING CONFIGURATION MODE> to <MANUAL CONFIGURATION> before you can set the <CONTINUOUS RECORDING>.
2. Use the [▲▼◀▶] buttons on the remote control or use the mouse to select either <SIZE/FPS/QUALITY> or <SCHEDULE>.

5.2.5. Size/FPS/Quality Setting

1. Please select the day of the week to perform the continuous recording.
To select <DAY>, set the <SCHEDULED MODE> to <WEEKLY> in <MANUAL CONFIGURATION OPTIONS> of <OPERATION MODE>.

2. Click a time cell from which you want to edit the SIZE/FPS/Quality and drag it to a desired cell.



Or use the [▲▼◀▶] buttons on the remote control to move to the cell and press [ENTER]. Then, use the [▲▼◀▶] buttons to move to a desired cell and press [ENTER] again

3. When the cell selection is complete, the "SIZE/FPS/QUALITY" table appears.
! Specify the <RESOLUTION>, <FPS>, <QUALITY> and use of the <AUDIO> recording for each channel.

- > RESOLUTION : set the size of the video recording.
- > FPS : set the frame rate per second.
- > QUALITY : set the recording quality.
- > AUDIO : specify the use of the audio recording.
- > HELP : You can view help text regarding the recording configuration.


4. When done, click <OK>.

You can check the recording size in the size table under the time selection bar.
! The video size, FPS, quality and audio recording options may differ depending on the specification of the IP camera. For some IP cameras, the video transfer may be interrupted if some of the options are changed.

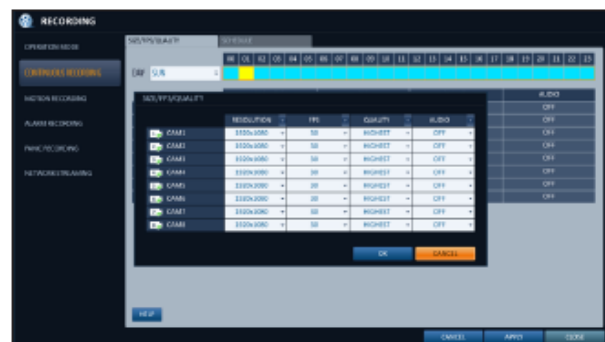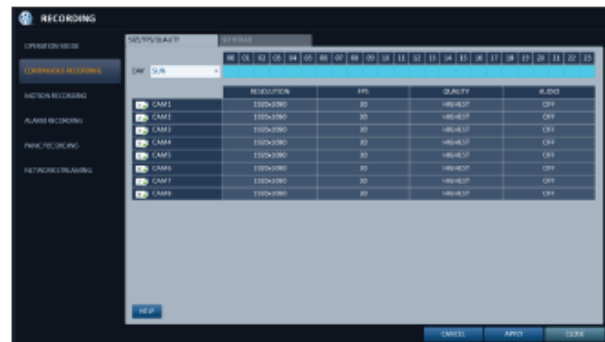

5.2.6. Schedule Setting

1. Select a start day of the week on the schedule.
2. Click a time cell from which you want to make the schedule and drag it to a desired cell. Or use the [▲▼◀▶] buttons on the remote control to move to the cell and press [ENTER]. Then, use the [▲▼◀▶] buttons to move to a desired cell and press [ENTER] again.
3. When the time selection is complete, you will be prompted to specify the use of recording in the Record Setup window.
4. Click <COPY SCHEDULE TO> to check the checkbox of the date that you want to copy the schedule at.
5. To apply the change, click <APPLY> in the bottom of the screen.
6. When done, press the [exit] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

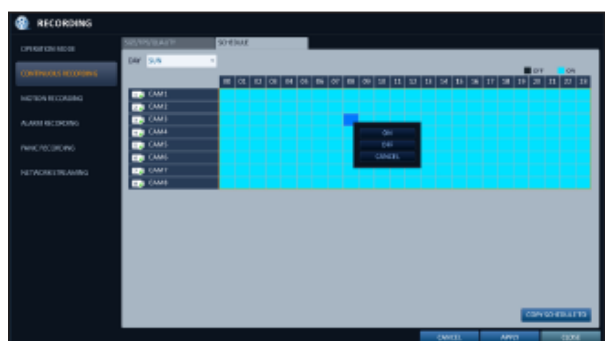


5.2.7. Motion Recording

Specify the recording size of the motion event if it occurs and make schedule for that recording.

- From the <RECORD SETUP> menu, select <MOTION RECORDING>.

From <OPERATION MODE>, you must set <RECORDING CONFIGURATION MODE> to <MANUAL CONFIGURATION> before you can set the <MOTION RECORDING>.
- Use the [▲▼◀▶] buttons on the remote control or use the mouse to select either <SIZE/FPS/QUALITY> or <SCHEDULE>.
- Set each item for the motion recording.

For more information, see the "Continuous Recording".
- To apply the change, click <APPLY> in the bottom of the screen.
- When done, press the [exit] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

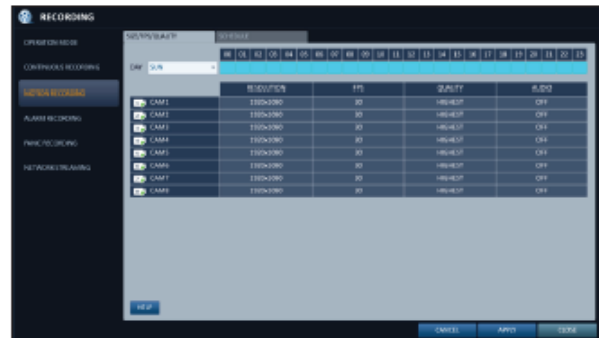


5.2.8. Alarm Recording

Specify the recording size of the alarm event if it occurs and make schedule for that recording.

- From the <RECORD SETUP> menu, select <ALARM RECORDING>.

From <OPERATION MODE>, you must set <RECORDING CONFIGURATION MODE> to <MANUAL CONFIGURATION> before you can set the <ALARM RECORDING>.
- Use the [▲▼◀▶] buttons on the remote control or use the mouse to select either <SIZE/FPS/QUALITY> or <SCHEDULE>.
- Set each item for the alarm recording.


For more information, see the "Continuous Recording".
- To apply the change, click <APPLY> in the bottom of the screen.
- When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

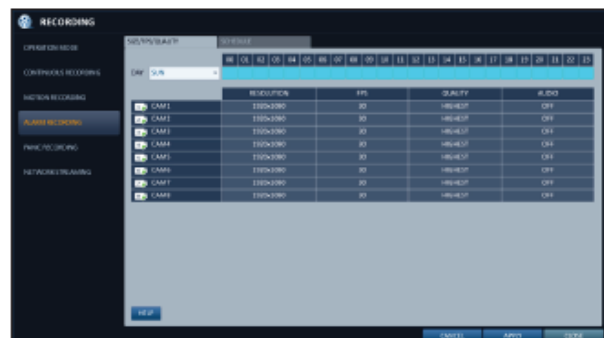

5.2.9. **Panic Recording**

In panic recording mode, you can specify the recording size and quality of the video.

1. From the <RECORD SETUP> menu, select <Panic RecoRding>.
2. Set each item of <RESOLUTION>, <FPS>, <QUALITY> and use of the <AUDIO> for the panic recording. For more information, see the "Continuous Recording".
3. To apply the change, click <APPLY> in the bottom of the screen.
4. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

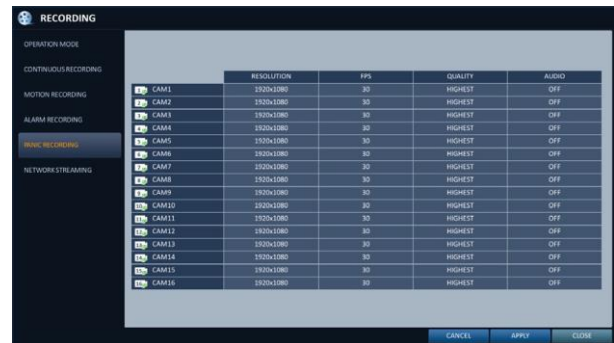

5.2.10. **Network Streaming**

You can specify the maximum size of network streaming for remote users and set the FPS.

Even if you set the resolution and FPS to high for the network streaming, the NVR will reduce the size or FPS according to the network status (speed) before transferring the recording video.

1. From the <RECORD SETUP> menu, select <NETWORK STREAMING>.
2. Use the [▲▼◀▶/ENTER] buttons on the remote control or use the mouse to select an item that you want to edit.
3. Set the <MAX RESOLUTION> and <MAX FPS> for each channel.
> ENABLE ADAPTIVE STREAMING CONTROL FOR REMOTE CLIENTS. : Optimizes the transfer rate for client PC and mobile accesses, in case the network connection (through the Internet) is low speed. (Default : Selected / Enabled)
Frame rate of recorded video playback may drop to 15 fps for recordings of 5 or more split screens.
4. When done, click <OK>.
5. To apply the change, click <APPLY> in the bottom of the screen.
6. When done, press the [exit] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.




6. Search


You can search for the recording data in the HDD by the criteria of time, thumbnail, event, etc.

6.1. To move to the Search menu while in monitoring

HOW to use the mouse

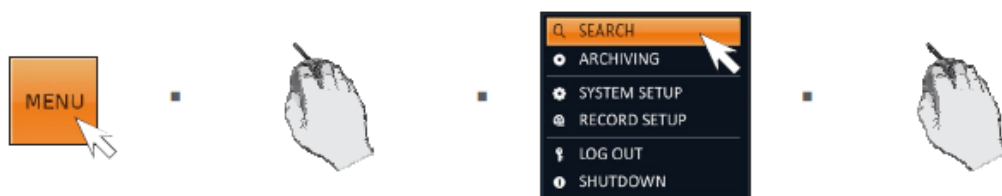

HOW to use the remote control 1

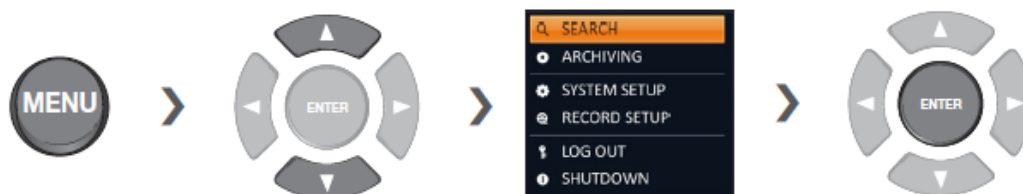

HOW to use the remote control 2



6.2. To move to the Search menu while in playback mode

HOW to use the mouse



HOW to use the remote control





6.3. Search Settings

6.3.1. TIME Search

With the calendar, you can search for the recording data by the recorded date.

- From the <SEARCH> menu, select <TIME SEARCH>.
- Use the [▲▼◀▶] buttons or use the mouse to specify the search date and time from the calendar in the left corner of the screen.
 > FIRST : The first date of recording is automatically selected.
 > LAST : The last date of recording is automatically selected.
 > [🕒] : Press this to display the time selection menu where you can specify the time and date.
- You can identify the type of the recording data by the color in the bar.
 > Yellow Green (Pre recording) : The pre-recording is performed on the recording data after you set the <PRE RECORDING TIME> from <OPERATIONMODE>.
 > Green (Continuous) : The continuous recording is performed on the recording data.
 > Red (Alarm) : The alarm event recording is performed on the recording data.
 > Blue (Motion) : The motion event recording is performed on the recording data.
 > Yellow (Panic) : The panic manual recording is performed on the recording data.
- Click to move to a desired start time in the time bar, or use the buttons at the bottom of the status bar to make search.
 > [🕒] : Recall the recording data.
 > [🔍] : Expand the timeline of the time bar to a greater unit of time.
 > [🔍] : Collapse the timeline of the time bar to a smaller unit of time.
 > [◀] : Use this to move to a previous time that is hidden in the time bar as it is expanded to a greater time unit.
 > [▶] : Use this to move to a next time that is hidden in the time bar as it is expanded to a greater time unit.
- Click a thumbnail channel or use the [▲▼◀▶] buttons on the remote control to move to a desired channel and press [ENTER]. You can check the video in <PREVIEW>.
 ! Click to move to a desired time, or simply double-click a desired time in the time bar to play the video data on that time.
- Press the [ENTER] button again on the remote control with the mouse, or simply double-click on the channel. You will move to the playback screen.
- If you want to stop playing and return to the search screen, press [EXIT] or [SEARCH] on the remote control. You can also click <MENU> in the lower left corner and select a desired menu.

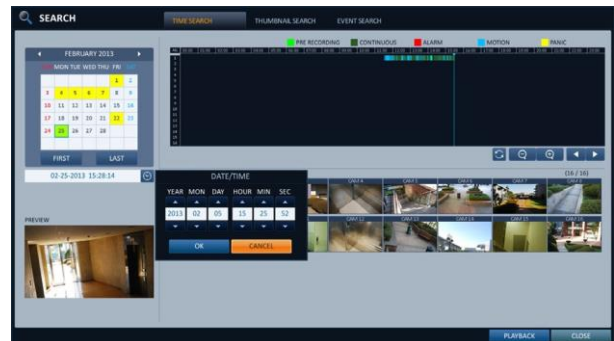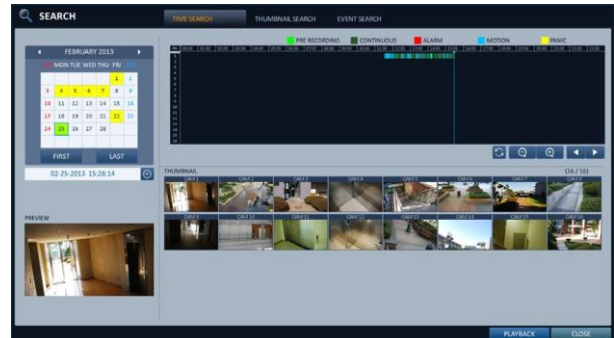


6.3.2. *Thumbnail Search*

To improve your search, you will be provided with a list of thumbnails. Select Day, Hour or Minute to narrow down the search results.


1. From the [SEARCH] menu, select [THUMBNAIL SEARCH].
2. Use the [▲▼◀▶] buttons or use the mouse to specify the search date and time from the calendar in the left corner of the thumbnail search screen.
 - > FIRST : The first date of recording is automatically selected.
 - > LAST : The last date of recording is automatically selected.
 - > CHANNEL : Select a channel to search for.
 - > DATE/TIME : Specify the search date and time. The menus available differ depending on the selected interval mode.
 - > INTERVAL: Select a time interval of the thumbnail view.
3. Double-click a desired play time in the recording data bar, or double-click a desired time image from the thumbnail list.

You will move to the playback screen.
4. If you want to stop playing and return to the search screen, press [exit] or [SEARCH] on the remote control.


You can also click [MENU] in the lower left corner and select a desired menu.

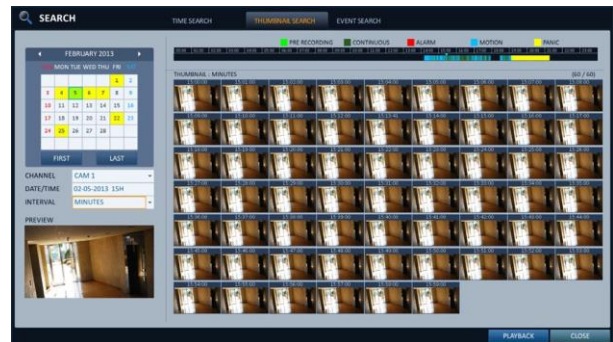

< "MINUTES" selection screen >

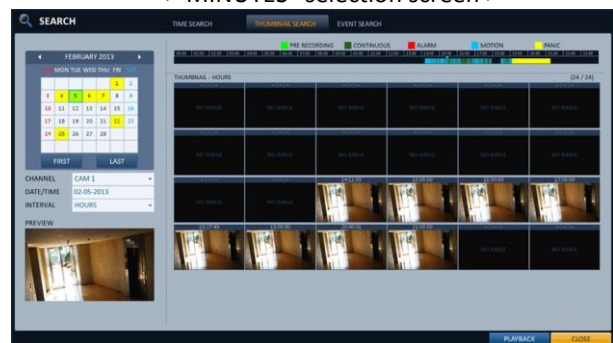

< "HOURS" selection screen >

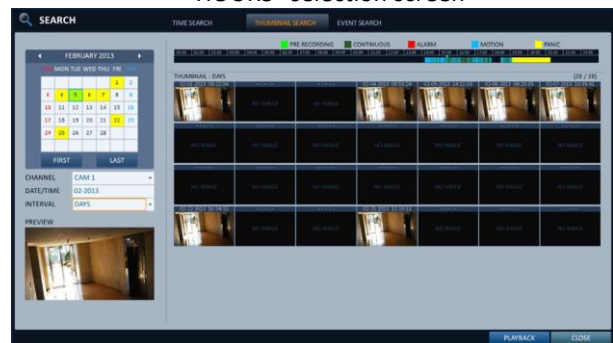

< "DAYS" selection screen >

6.3.3. Event Search

Search for events that occurred at the specified time and select an event to play from the list.

1. From the <SEARCH> menu, select <EVENT SEARCH>.
2. Use the [▲▼◀▶] buttons or use the mouse to specify the <START> and <end> times in the left of the event search list.
3. Select a channel to search.
4. Mark the checkbox of the event to search from the <EVENT> list.
5. Press the <SEARCH> button.
The search results will be listed as shown.

- > TYPE : displays the event type.
- > TIME : displays the recording start time.



- › CONTENTS : shows the details of the event found.
 - › ORDER BY : If you select <OLDEST>, the list will be sorted with the earliest one on top.
6. Double-click a desired event or click <PLAYBACK> in the lower right corner to move to the play screen.
 7. If you want to stop playing and return to the search screen, press [EXIT] or [SEARCH] on the remote control. You can also click <MENU> in the lower left corner and select a desired menu.

7. Playback

7.1. If you want to play

1. To play the searched data - You can search for and play a searched data.
2. To play with the live viewer
 - Simply double-click a desired time point in the right corner of the play screen.
 - If you move the cursor to the rightmost, the "Timeline" bar will be displayed.
 - Select a desired channel in the live screen and right-click to select <Playback> in the context menu. Then, select a desired play time.

7.2. Playback screen configuration



Video window

- Display the current video.

Timeline

- Display the type of recording data.
The vertical bar in the timeline indicates the current point of playback. Double-click a desired point in the timeline to start playing the video from that point. Once you drag to specify an area, you can perform the backup or event search for that area.

Menu/split-screen selection menu

- For more information about how to use each button, refer to "Using the status bar in the live mode".










Play bar

- You can start playing, stop playing or change the play speed of the current video.

7.2.1. Playback channel selection menu

Item	Description
CAM1	Display the title of the selected channel.
ZOOM	Zoom the video of the selected channel. (The zooming function is active only in '1' split screen.)
START BOOKMARKING	The "BOOKMARK SETUP" popup appears, and you can bookmark a play point for the backup purpose.
SNAPSHOT	Capture the current live video and save it in the .jpeg format.


7.2.2. Using the play bar

Item		Description
Jump		Move forward or backward.
Reverse Fast Play		The video will be reversely played at the speed of x64 > 32 > 16 > 8 > 4 > 2 in this order.
Reverse Play		Play the video in the reverse direction.
Pause		Stop playing forward or playback temporarily.
Play		Play the video forward.
Fast Forward		The video will be played forward at the speed of x2 < 4 < 8 < 16 < 32 < 64 in this order.
Zoom In		Move to the zoom in/out screen of the selected channel.
Snapshot		Capture the current live video and save it in the .jpeg format. Then, you can save the captured video in the HDD or export it to an external USB memory device. While you perform the snapshot, the current video will be stopped playing.
Start/end bookmark		Add a bookmark for the current playback screen. Press this to display the "BOOKMARK SETUP" window. Provide each entry and click Start. The arrow in the bookmark button blinks to indicates that the bookmarking is in process. If you press the Bookmark button again, the bookmarking stops and the current settings will be reserved. Then, the reserved data can be backed up in Archive menu or can be played in the "RESERVED DATA MANAGEMENT" menu.

7.3. Bookmarking

During playback, you can add a bookmark for reserving the video data.

You can view the bookmarked data in the Archive menu, which can be saved to a connected device for the backup purpose.

1. Provide a tag in the <TAG> item for data reservation.
2. Provide the details of the reserved data in the <MEMO> input box.
3. Click <START>.
You will return to the play screen with the backup progress.
4. To stop the bookmarking, click <BOOKMARK> ().
5. To quit the bookmarking, click <STOP>.
To continue with bookmarking, just click <CONTINUE>.



6. Click <RESERVE>.

You can export the reserved data to a connected storage device using the <ARCHIVING> menu.



What is the <RESERVE> function?

With the <RESERVE> function, you can reserve data even in overwrite mode. This is useful if you want to backup data but you have no backup device available such as USB memory. If you use "Reserve", the recording days will be compromised. When you have backed up the reserved data to an external device, it is recommended to delete the internal reserved data.




8. Archiving

8.1. Using the archive menu during playback

1. During the playback, click <NEW ARCHIVE()>.
2. The "ARCHIVING SETUP" window appears where you can reserve the data.
3. Click <MENU()> in the lower left corner and select the <ARCHIVING> menu.
4. Press the [ARCHIVE] button on the remote control.



8.2. Using the archive menu during monitoring

1. Click <MENU()> in the lower left corner and select the <ARCHIVING> menu.
2. Press the [ARCHIVE] button on the remote control.

8.3. Archive


You can archive the searched data or reserve it.

1. From the <ARCHIVING> menu, select <NEW ARCHIVING>.
2. Select a date for the archive from the calendar in the left.
The date containing recording data will be marked in a colored box.
- FIRST : The first date of recording is automatically selected.
- LAST : The last date of recording is automatically selected.
3. Check the <FROM> and <TO> times.
Drag the timeline to specify the start and end time.
4. Mark the <LOG> and <CODEC> checkboxes and select to include the archiving.
5. Click <QUERY>.
The results will be listed in <ARCHIVINGINFO>.
The maximum backup capacity for one time is 20GB.
If the archiving request exceeds 20GB, the end time will be adjusted to within 20GB.
6. If you want to import to a storage device, connect it to the NVR and click <EXPORT>.
7. If you just want to reserve the data, click <RESERVE>.
If the <TAG NAME> dialog appears, enter the name and click <OK>. Click <RESERVE> to save it to the HDD.
Using <RESERVE> will compromise the recording days available. When you have archived the reserved data to an external device, it is recommended to delete the internal reserved data.
8. To exit the Archive menu, click <CLOSE>.

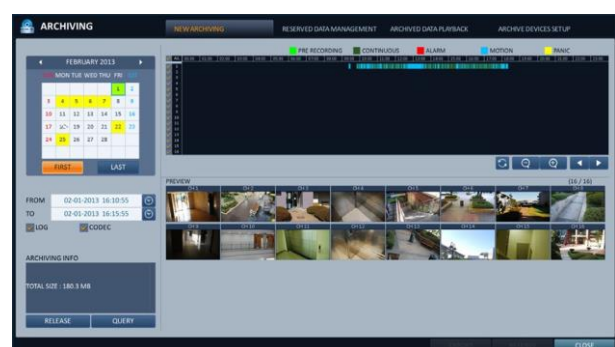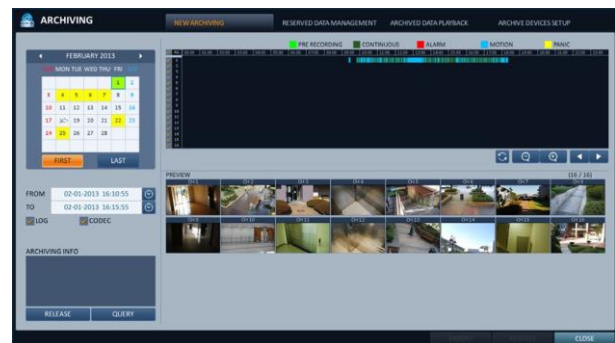

8.3.1. Reserved data management

You can search for the reserved data and delete or import it to a storage device.


1. From the <ARCHIVING> menu, select <RESERVED DATA MANAGEMENT>. The reserved data will be listed.
2. Select a data type from <AVI> and <SNAPSHOT>.
 - > AVI : Searches AVI video files stored in the NVR.
 - > SNAPSHOT : Searches captured snapshots stored in the NVR.
3. If you want to play the data, double-click a desired data item or click it and select <PLAYBACK>.
4. If you want to import to a storage device, connect it to the NVR and click <EXPORT>.
5. If you want to delete the reserved data, click  next to the list. Click <RELEASE ALL> to cancel reserving the whole page at once.
6. To exit the Archive menu, click <CLOSE>.



8.3.2. Playing the archived data

You can search the storage device for the archived data and check the details of or play it.

1. Connect the storage device containing the archived data.
2. When the storage device is recognized, click <SEARCH>.
3. To view the details, click <> next to the list. Click <VERIFY INTEGRITY> to check if the data is corrupt or incomplete.
4. Select an item to play from the list and click <PLAYBACK>.
5. To exit the Archive menu, click <CLOSE>.

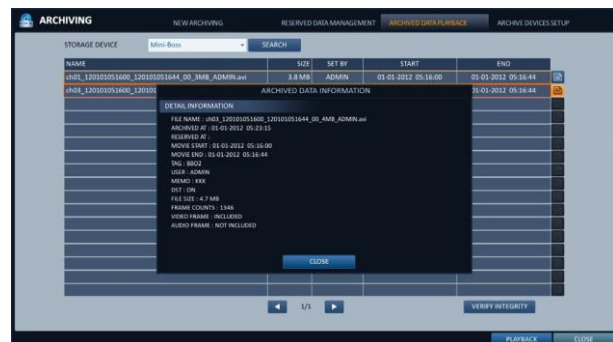

8.3.3. *Archive devices Setup*

Provide the FTP server information for archiving data in the HDD before testing the transfer.

1. From the <ARCHIVING> menu, select <ARCHIVE DEVICES SETUP>.
2. Move to the FTP information box.
3. Fill in each item using a virtual keyboard.
 - > HOST NAME : enter the address at which you can access the server.
 - > PORT : enter the port number to which you can access the server.
 - > USER NAME : enter the user ID with which you can access the server.
 - > PASSWORD : enter the connection password.
 - > DIRECTORY : specify the archiving path.
4. When all information is filled, click <CONNECTIONTEST> to check the connection status.
5. To apply the change, click <APPLY> in the bottom of the screen.
6. When done, press the [EXIT] button on the remote control or click <CLOSE> in the lower screen to return to the previous menu.

The screenshot shows the 'ARCHIVING' menu with the 'ARCHIVE DEVICES SETUP' option selected. The setup screen has a title bar with 'ARCHIVING' and several sub-menus: 'NEW ARCHIVING', 'RESERVED DATA MANAGEMENT', 'ARCHIVED DATA PLAYBACK', and 'ARCHIVE DEVICES SETUP'. Below the title bar, there's a 'FTP' section with input fields for 'HOST NAME', 'PORT' (containing '21'), 'USER NAME', 'PASSWORD', and 'DIRECTORY' (containing 'ARCH'). A 'CONNECTION TEST' button is located below these fields. At the bottom of the screen, there are three buttons: 'CANCEL', 'APPLY', and 'CLOSE'.

9. Web Viewer

9.1. What is the web viewer?

The Web Viewer is an application software program for a PC (for web browser) that provides user-friendly interface for easier access and use over the network, to access NVR remotely, view or search live / recorded videos and control NVR.

9.2. System Requirements

The following is the minimum hardware and operating system requirements to run Web RA.

Operating System	Windows XP Professional Windows Vista Home Basic / Premium Windows 7
Web browsers:	Internet Explorer 7.0 or later/Mozilla Firefox 3.6/Google Chrome 4.1/Opera 10 Some web browsers other than Internet Explorer may not fully function
CPU:	Intel Pentium 2.0 GHz
Memory	512 MB
Display	16-bit 1024 x 768 High Color
Hard Disk Drive	50MB (space required for installing the web viewer) *Additional HDD space is required for saving your recordings. The file size of your recording may differ depending on the specified quality.

9.3. connection

Open a browser and enter the IP address of NVR, or type the URL in the address bar.

9.3.1. To connect to the nvr from inside

- › Check the "network Status" and verify the <IP ADDRESS> and <WEB SERVICE PORT> of the NVR.
- › Enter the IP address and web service port in the address bar of the browser.
Ex) http://192.168.1.200:8080



9.3.2. To connect to the nvr from outside

- › Using the IP address
 - Check the "network Status" and verify the <EXTERNAL IP ADDRESS> and <WEB SERVICE PORT> of the NVR.
 - If using a fixed (external) IP, enter the external IP that is specified in the NVR in the address bar of the web browser. Ex) If the internal IP address is set to "http://222.112.4.48:8080" (192.xxx.xxx.xxx), no access from outside is allowed.
- › Using the URL.
 - Check the "network Status" and verify the <DDNS ADDRESS> and <WEB SERVICE PORT> of the NVR.
 - Enter the DDNS address and web service port in the address bar of the browser.
Ex) http://00115f123456.dvrlink.net:8080


! In a router network, you have to set the "Port Forwarding" and "DMZ Setting" to allow access from outside.

! For the necessary settings of the router, refer to the user manual of the router or contact the manufacturer of the router

1. Provide the user ID and password.
The default User name : **ADMIN**;
the default password is **1234**.



2. Click the upper warning bar to install the ActiveX.
If you fail to download the ActiveX control, move to Tools ; Internet Options ; Security ; Custom Level ; Download unsigned ActiveX control, and change its setting from "Disable (recommended)" to "enable", and then click OK.
3. Click <INSTALL>.

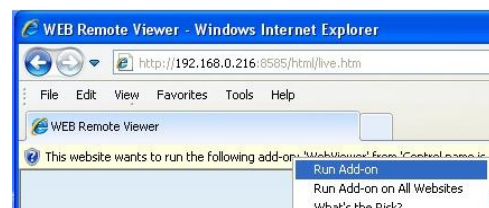

4. When the installation is complete, you will see the live screen.



9.4. Live

Live Screen at glance




No.	No. Name	Description
a	View Selection tab	You can switch to the live, playback and setup screen and check the provided information.
b	Live	Display the live screen of the currently connected NVR.
c	Split Mode	Select and switch to a desired split-screen mode.
d	Sequence	Set the sequence mode, switch to the next camera, zoom the screen or select the full screen mode.
e	Status	Show the connection status of each channel.
	Log	Show the log.
	PTZ	You can control PTZ cameras connected to each channel. (Only for PTZ cameras.)
	Refresh Time	Set the interval at which the NVR Status is refreshed.
	Reload	Load the NVR Status immediately.
f	Voice transmission	With the microphone, your voice will be transmitted to the NVR, or you can turn on or off the output of the voice signal
g	Channel	Select a channel listed in the screen.
h	Save	Save the live video on the screen.
	Print	Print out the current screen.
	Capture	Capture the selected image.
	ActiveX Settings	Configure the ActiveX settings or specify the saving path of the captured image.

9.4.1. *Switching the split mode*

Click the Switch button to switch the mode as follows:



<1-split Mode>

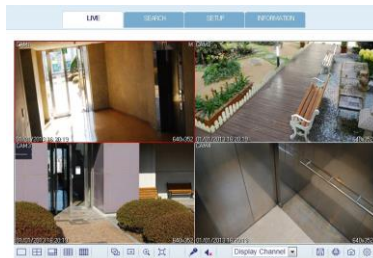


<4-split Mode>



<9-split Mode>



<9-split Mode>

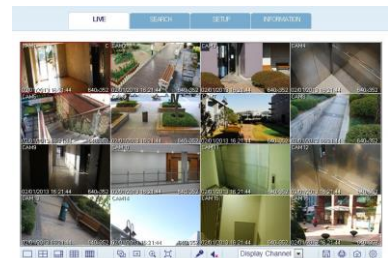

<16-split Mode>

9.4.2. *To save the video*

1. Click <📁> to start saving.
2. The video from the selected channel will be saved to the PC in the AVI format. (Default path: C:\SaveFolder)
Click <📁> again to stop saving. Click <⚙️> to display the context menu where you can change the saving path.


9.4.3. *Print*


1. Click <🖨️>.
2. The current screen will be printed with the printer connected to the PC.

9.4.4. *Screen capture*

1. Click <🖼️>.
2. The current screen of the selected channel will be saved to the path specified in the PC. (Default path: C:\SaveFolder) Click <⚙️> to display the context menu where you can change the saving path.

9.4.5. **Activex Settings**

1. Click  >
2. When the setup screen appears, you can change the settings of the render type, audio, capture and saving path as well as the video streaming.
! Render : DirectDraw is recommended in order to enable the hardware acceleration.
3. If you want to change the saving path, click <> (Save Folder) and specify a new path.
The Windows Vista user cannot change the saving path.
4. Change the streaming settings according to the PC specification and network environment.
Auto mode is recommended.
> Sync : If this option is set, the audio signal will be synchronized with the video signal. However, you may encounter a delay due to buffering for the synchronization.
> Live CH : Set the audio signal to use in live monitoring mode.
> I Frame Only : Only the I frames (key frames) will be transferred.
> Type
- Auto : The NVR will optimize the quality and FPS to the network status and specification of the connected PC before transferring the data.
- Main : The video will be transferred in high definition (HD).
- Second : The video will be transferred in a medium definition (SD).
5. When done, click <OK> to save your settings.

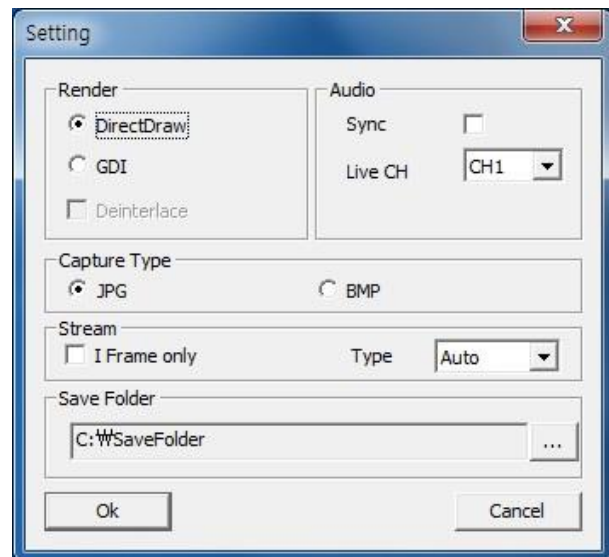

9.4.6. **Status tab**

Click <Status> at the bottom of the screen.

You can check the event occurrence for each channel of the connected NVR.

STATUS	LOG	PTZ
CHANNEL NO.	1	2
ALARM IN (CAM)		
ALARM IN (NVR)		
MOTION		
VIDEO LOSS		
RECORDING		
ALARM OUT (CAM)		
ALARM OUT (NVR)		

REFRESH 3 SEC

REFRESH

9.4.7. **Log tab**

Click <Log> at the bottom of the screen.

You can check the log of the connected NVR.

STATUS	LOG	PTZ
No.	DATE TIME	LOG
1	2013.02.25 17:13:02	MOTION: A motion event is detected on #01.
2	2013.02.25 17:13:02	RECORD: Camera #01 starts motion recording.
3	2013.02.25 17:13:02	RECORD: Camera #01 stops continuous recording.
4	2013.02.25 17:09:58	RECORD: Camera #01 starts continuous recording.
5	2013.02.25 17:09:58	MOTION: A motion event of #01 is returned to normal state.
6	2013.02.25 17:09:58	RECORD: Camera #01 stops motion recording.
7	2013.02.25 17:08:30	MOTION: A motion event is detected on #01.
8	2013.02.25 17:08:30	RECORD: Camera #01 starts motion recording.

PAGE UP PAGE DOWN

REFRESH 3 SEC

REFRESH

9.4.8. **PTZ tab**

Click <PTZ> at the bottom of the screen.

You can control the operations of a PTZ camera. Adjust the focus, zooming and iris of the camera. You can use the arrow buttons to control the operations of the camera.

- > Pattern : You can configure various settings of the camera including the zooming and movement.
(Applied to some PTZ cameras only)
- > PRESET : Move the camera in a predefined direction.
- > Swing : The camera will move back and forth to a set position.




The screenshot shows the PTZ control interface with the following elements:

- Tabs:** STATUS, LOG, PTZ (active).
- Pattern:** A dropdown menu showing '0', with 'Set' and 'Run' buttons below it.
- PRESET:** A dropdown menu showing '0', with 'Set' and 'Run' buttons below it.
- Swing:** Includes 'START' and 'END' dropdown menus (both showing '0'), a 'Run' button, and a 'STEP' dropdown menu (showing '1').
- Camera Functions:** Checkboxes for ZOOM, FOCUS, and IRIS, each with a '+' button.
- Navigation:** A set of arrow buttons (up, down, left, right) and a central 'PTZ' button.

9.5. Search

Click <SEARCH> to display the remote control screen for the NVR.

9.5.1. Search Viewer at a Glance

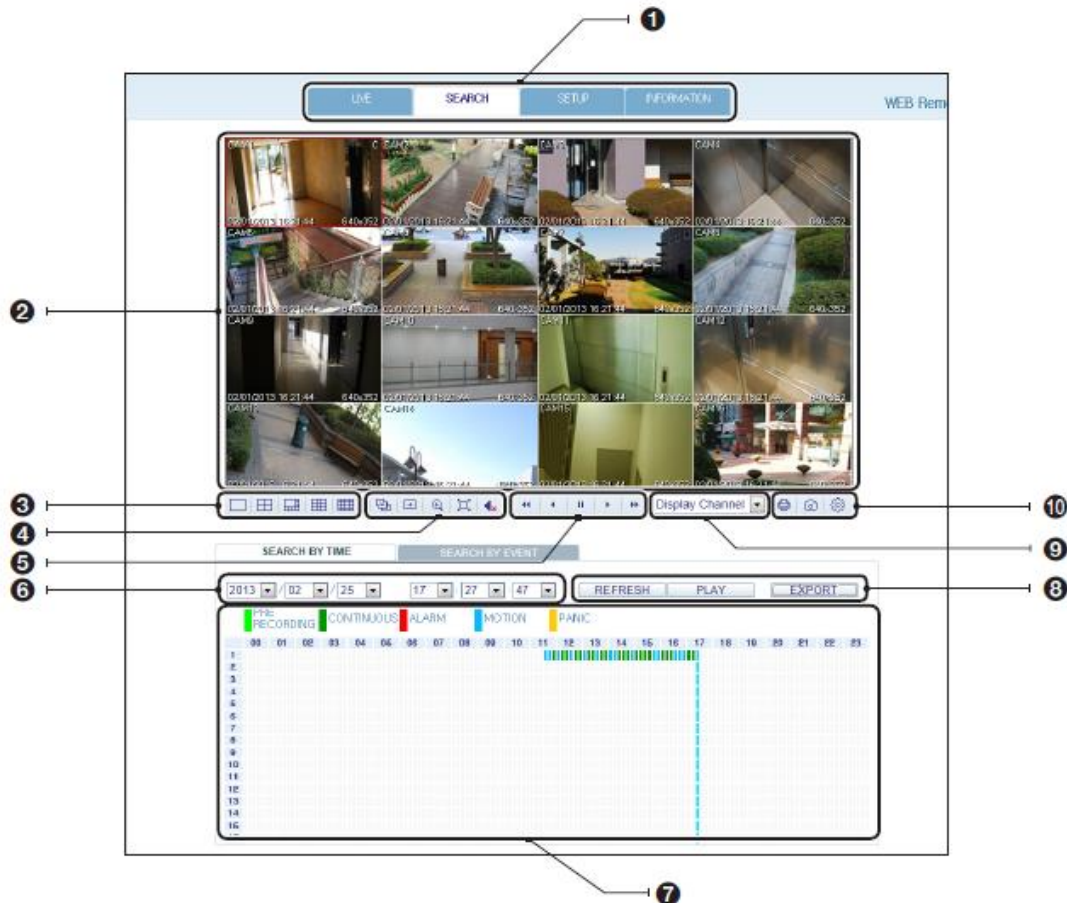


No.	No. Name	Description
1	View selection tab	You can switch to the live, playback and setup screen and check the provided information.
2	Playback Screen	Play the recording data.
3	Split Mode	Select and switch to a desired split-screen mode.
4	Sequence	Set the sequence mode, switch to the next camera, zoom the screen or select the full screen mode. You can turn on/off the voice signal
5	Play button bar	You can control the playback screen
6	Time Selection	Specify the start time of playback
7	Time Line	Indicates the status of the recorded data.
8	REFRESH	Reload the time line.
	PLAY	Play the video that satisfies your search criteria
	Export	Archive the video that satisfies your search criteria.
9	Channel Selection	Select a channel listed in the screen.
10	Screen	Print out the current screen.
	Image Capture	Capture the selected image.
	ActiveX Settings	Configure the ActiveX settings or specify the saving path of the captured image.

9.5.2. Search by time

Use the timeline to search for the data recorded in the NVR.

1. Select a date that you want to search.
2. Click <REFRESH>.
3. Check the existence of recording data in the bottom time line and specify the time range for your search. You can specify the start time by moving the time bar.
4. Click <PLAY>.
 - > REFRESH : If your changes are not applied to the current screen, reload the changes.
 - > PLAY : Play the searched video.
 - > Export : Archive the recorded video.

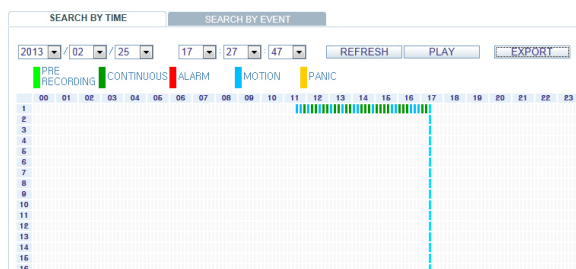


9.5.3. Search by event

You can sort the recording data items by event to facilitate your search.

1. Mark the checkbox of the event that you want to search for.
2. Specify the start and end dates and times for your log search.
3. Set the display order of the items found.
 - > LATEST : The most recent event will be listed on top.
 - > OLDEST : The earliest event will be listed on top.
4. Click <SEARCH>.

You can check the log for your search at the bottom of the screen.
5. Select a log to play the recording data.

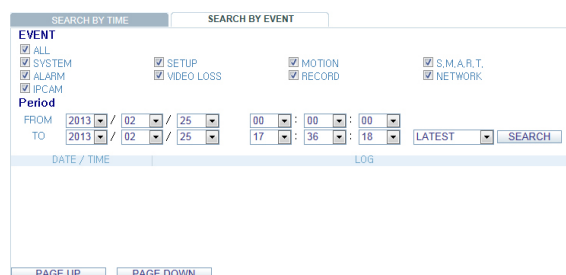

9.6. Setup

Click <SETUP> to display the remote control screen for the NVR.

When done, click <APPLY > to apply the changes to the remotely connected NVR.

If the NVR is in process of system or record setting, the remote control will be disabled.

! If you change the settings remotely at will, the major 'Record Settings' of the NVR may be changed, which is not recommended at all.

9.6.1. Setup Viewer at a Glance

CHANNEL	CAMERA TITLE
ALL	
1	CAM1
2	CAM2
3	CAM3
4	CAM4
5	CAM5
6	CAM6
7	CAM7
8	CAM8
9	CAM9
10	CAM10
11	CAM11
12	CAM12
13	CAM13
14	CAM14
15	CAM15
16	CAM16

9.6.2. Camera

To name the camera title

You can name the camera title that is displayed on each channel screen. Select a channel to name and provide a new title. Then, click <APPLY > to apply it.

! You can enter up to 9 alphanumeric characters for the camera title.

CHANNEL	CAMERA TITLE
ALL	
1	CAM1
2	CAM2
3	CAM3
4	CAM4
5	CAM5
6	CAM6
7	CAM7
8	CAM8
9	CAM9
10	CAM10
11	CAM11
12	CAM12
13	CAM13
14	CAM14
15	CAM15
16	CAM16

9.6.3. Camera Setting

You can set the image and exposure of each channel. When done, click <APPLY > to apply the changes.

- > The default color value is <50>. (Brightness, Contrast, Tint, Color)
- > If you change the default settings, the video from the NVR or the video color may not be displayed properly.
- > To apply the same settings to another channel's camera, click <COPY SETTINGS TO> button and set the checkbox.

CH1 - CAM1 NMD-2003P

IMAGE SETTINGS EXPOSURE DIRECT CONFIGURE

BRIGHTNESS 50 [0-100]

CONTRAST 50 [0-100]

HUE 50 [0-100]

COLOR 50 [0-100]

SHARPNESS 8 [1-15]

MIRROR IMAGE NONE

FOCUS

AUTO FOCUS CONTINUOUS [ONE] [HOME]

FOCUS [NEAR] [FAR]

WHITE BALANCE

WHITE BALANCE [AUTO]

WIDE DYNAMIC RANGE

WIDE DYNAMIC MO... [0-100]

LEVEL [0] [100]

DAY(COLOR) / NIGHT(BW)

IR CUT FILTER [AUTO]

DNN TOGGLE [0 SEC]

COPY SETTINGS TO

9.6.4. Covert Setting

You can set to hide the video of a specific camera from a specific user. Set to hide the camera video so that a specific user or user group can not view. To change the covert settings from user group to user, move to the <USER> menu and make necessary changes.

- › When done, click <APPLY > to apply the changes.
- > SHOW AS : Sets how to display video of the <COVERT CHANNEL> channel.
- NO VIDEO : Appears to have no video for the channel.
- COVERT : Shows nothing for the Live screen only.

COVERT SETUP

CHANNEL	ADMIN	MANAGER	USER	LOG OUT
ALL	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SHOWN AS	COVERT	NO VIDEO	NO VIDEO	NO VIDEO

9.6.5. Motion Setting

Specify the use of motion detection and reaction for each channel and set also the daytime/nighttime options. Select a channel. Set the mask area and activation and specify the daytime range.

When done, click <APPLY > to apply the changes.

! For information about how to set the motion area, refer to "Motion Area Setup".

MOTION SENSOR

ACTIVATION		MOTION MARK	
CAM	ON/OFF	ON/OFF	ON/OFF
CAM1	ON	OFF	OFF
CAM2	ON	OFF	OFF
CAM3	ON	OFF	OFF
CAM4	ON	OFF	OFF
CAM5	ON	OFF	OFF
CAM6	ON	OFF	OFF
CAM7	ON	OFF	OFF
CAM8	ON	OFF	OFF
CAM9	ON	OFF	OFF
CAM10	ON	OFF	OFF
CAM11	ON	OFF	OFF
CAM12	ON	OFF	OFF
CAM13	ON	OFF	OFF
CAM14	ON	OFF	OFF
CAM15	ON	OFF	OFF
CAM16	ON	OFF	OFF

MOTION SENSOR

ACTIVATION

AREA SETUP

Select

Normal

SELECT ALL

DESELECT ALL

CHANNEL

1

DAYTIME

9:00

~

18:00

SENSITIVITY

DAYTIME

10

1

NIGHTTIME

10

1

INTERVAL

50

[1~100]

9.6.6. PTZ Setting

You can set the camera ID, protocol, baud rate and data transmission speed for each channel.

! For information about how to set the PTZ, refer to "PTZ Settings".

CHANNEL	RS485	ID	PROTOCOL	BAUD RATE
1	<input checked="" type="checkbox"/>	0	PELCO-D	9600
2	<input checked="" type="checkbox"/>	0	PELCO-D	9600
3	<input checked="" type="checkbox"/>	0	PELCO-D	9600
4	<input checked="" type="checkbox"/>	0	PELCO-D	9600
5	<input type="checkbox"/>	0	PELCO-D	9600
6	<input type="checkbox"/>	0	PELCO-D	9600
7	<input type="checkbox"/>	0	PELCO-D	9600
8	<input type="checkbox"/>	0	PELCO-D	9600
9	<input type="checkbox"/>	0	PELCO-D	9600
10	<input type="checkbox"/>	0	PELCO-D	9600
11	<input type="checkbox"/>	0	PELCO-D	9600
12	<input type="checkbox"/>	0	PELCO-D	9600
13	<input type="checkbox"/>	0	PELCO-D	9600
14	<input type="checkbox"/>	0	PELCO-D	9600
15	<input type="checkbox"/>	0	PELCO-D	9600
16	<input type="checkbox"/>	0	PELCO-D	9600

9.6.7. Display

9.6.8. OSD Setting

Configure the settings for the time, title, boundary, icon and language that will be displayed on the screen.

Make changes to each item of the OSD menu and click <APPLY > to apply the changes.

For details about each displayed item, refer to "OSD".

OSD

CAMERA TITLE

RECORDING MODE ICON

AUDIO ICON

STATUS BAR ON FULL SCREEN MODE

TIMELINE ON FULL SCREEN MODE

BORDER

BORDER COLOR

LANGUAGE

9.6.9. Monitor Settings

You can set the interval of an active sequence.

Specify the interval and click <APPLY > to apply it.

MONITOR

SEQUENCE DWELL

9.6.10. Audio

Audio/Buzzer

You can configure the settings of the voice and audio signal.

! For details about each displayed item, refer to "Audio Setup".

AUDIO

DEFAULT LIVE AUDIO CHANNEL

NETWORK AUDIO TRANSMISSION

RECEIVE NETWORK AUDIO

BUZZER

REMOTE CONTROLLER

9.6.11. User

User Management

You can add a user account and change the password.

For details about each displayed item, refer to "User Setting".

USER ID	GROUP	COVERT CHANNEL	EMAIL	NOTIFICATION	EDIT	DELETE
ADMIN	ADMIN			<input type="checkbox"/>	<input type="button" value="EDIT"/>	
AAA	MANAGER			<input type="checkbox"/>	<input type="button" value="EDIT"/>	<input type="button" value="DELETE"/>

To add a user, click <ADD> and provide the user information.

If you want to delete the user click <DELETE> next to it.

When done, click <APPLY > to apply the change.

Group Permission Setting

You can grant different user groups different permissions to a specific menu.

Mark the checkboxes of the menu items accessible by the user group.

When done, click <APPLY > to apply the changes.

For more information about the accessible menu items, refer to "Group Authority".

GROUP AUTHORITY

	Manager	User
SEARCH	<input checked="" type="checkbox"/>	<input type="checkbox"/>
ARCHIVING	<input type="checkbox"/>	<input type="checkbox"/>
SYSTEM SETUP	<input checked="" type="checkbox"/>	<input type="checkbox"/>
RECORD SETUP	<input checked="" type="checkbox"/>	<input type="checkbox"/>
EVENT ACTION CONTROL	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
LISTEN TO AUDIO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MIC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
REMOTE LOG IN	<input type="checkbox"/>	<input type="checkbox"/>
SHUTDOWN	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

9.6.12. Network

IP Setting

You can check the network connection status and change the baud rate.

Change the maximum transfer rate and click <APPLY > to apply it.

! For more information about each network entry, refer to "IP Setup".

DDNS Setting

You can configure the DDNS settings so that remote users who are connected to the network can access remotely.

Change the DDNS settings and click <APPLY > to apply the changes.

Email Setting

You can register and test an email address so that an email notification is delivered at a specific interval or if an event occurs.

Provide the necessary information and click <APPLY > to apply it.

! For more information, refer to "Email".

Security Setting

For security purpose, you can set whether to use encryption and its method, and configure IP filtering. Change the system network settings and click <APPLY > to apply the changes.
! For more information, refer to "Security".

SECURITY

ENCRYPTION

IP FILTER

RTSP SERVICE

RTSP ENCRYPTION ENABLEOFF

RTSP ENCRYPTION METHODSEED_128

WEB SERVICE

HTTPS ENABLEOFF

HTTP AUTHENTICATION METHODBASIC

SECURITY

ENCRYPTION

IP FILTER

IP FILTER ENABLEOFF

IP FILTER RULEALLOW LIST

TYPE	LIST	
		ADD

9.6.13. **System**

Date/Time Setting

Specify the current date and time.
When done, click <APPLY > to apply the changes.

! For more information about each of the time and date settings, refer to "Date/Time".

DATE/TIME

DATE FORMATMM/DD/YYYY

TIME FORMAT24 HOUR

NETWORK TIME SYNCHRONIZATION

TIME SERVERpool.ntp.org

AUTO TIME SYNCON

SYNC AT00:00

TIMEZONE / DST

TIMEZONEGMT-05:00 America/EST

DSTON

System Management

You can configure the access settings of: log in, log out, and auto logout.

> Network F/W upgrade: Checks for the latest firmware available on the network with the given URL and update it.

To apply a new firmware, click <FW UPGRADE> and provide the firmware URL.

SYSTEM MANAGEMENT

NETWORK F/W UPGRADE

FW UPGRADE

PASSWORDON

EXPIRED TERM OF PASSWORDNOT USED

AUTO LOGOUTOFF

DURATION1 MINUTE

POE POWER LIMIT100w

POE POWER LIMIT (HUB)72w

AC POWER FREQUENCY60Hz

SYSTEM MANAGEMENT

NETWORK F/W UPGRADE

FW UPGRADE

PASSWORDOFF

EXPIRED TERM OF PASSWORDNOT USED

AUTO LOGOUTOFF

DURATION1 MINUTE

POE POWER LIMIT72w

AC POWER FREQUENCY60Hz

APPLY

CANCEL

FW UPGRADE

FW LOCATION

http://

VERIFY INTEGRITY

Verified 'F/W Location' field is required.

FW UPGRADE

CANCEL

System Information

You can check information of system firmware version, disk space, and network settings, as well as the status information of network connection and alarm I/O.

Control Device Setting

Set the connection of both the remote control and the keyboard control.

Change the communication settings and click <APPLY > to apply the changes.

! For more information about each communication item, refer to "Control Device".

Security Setting

For security, you can set to apply reinforced password policy (to system, search/backup) and control accessing audio and snapshot.

Change the system security settings and click <APPLY > to apply the changes.

! For more information, refer to "Security".

9.6.14. Storage

Device Information

You can check a list of internal/external storage devices connected to the NVR as well as the recording time information of each device

S.M.A.R.T Status

You can check the S.M.A.R.T status for each of the internal and external devices.

What is S.M.A.R.T?

This is a sort of HDD self-diagnosis tool that detects any error on the system and alerts the user if an error occurs

SYSTEM INFORMATION

FW VERSION	22310.1.703008.100
LAST FW UPDATE DATE	02-07-2013
HW VERSION	
DISK CAPACITY	232.9 GB
DISK USAGE	158.1 GB
NUMBER OF DISKS	1
IP ADDRESS	192.168.0.225
MAC ADDRESS	00115B91290
DNS ADDRESS	00115B91290.dvrlink.net
RTSP SERVICE PORT	5554
WEB SERVICE PORT	8080
RESOLUTION	HDMI(1080P-60)

STATUS

CAMERA CONNECTION	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
ALARM IN (CAMERA)	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
ALARM IN (NVR)	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
ALARM OUT(CAMERA)	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
ALARM OUT (NVR)	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

CONTROL DEVICE

DEVICE	SYSTEM ID	PROTOCOL	BAUD RATE
0		D-Max	9600

SECURITY

AUDIO SUPPORT	ON
SNAPSHOT SUPPORT	ON
ENHANCED PASSWORD RULE	OFF
PASSWORD CHECK WHEN SEARCH/BACKUP	OFF

DISK INFORMATION

	START TIME	END TIME	STATUS	CAPACITY	MODEL	S.M.A.R.T. STATUS
ALL	01-29-2013 14:42:58	02-25-2013 18:49:48	-	-	-	-
DISK 1	01-29-2013 14:42:58	02-25-2013 18:49:48	IN USE	232.9 GB	Hitachi HDP7	NORMAL
DISK 2	-	-	-	-	-	-
DISK 3	-	-	-	-	-	-
DISK 4	-	-	-	-	-	-
DISK 5	-	-	-	-	-	-

OPERATIONS

START TIME	01-29-2013 14:42:58
END TIME	02-25-2013 18:49:48
DISK WRITE MODE	OVERWRITE
RECORDING TIME LIMIT	OFF

S.M.A.R.T. SETUP

	Disk 1	Disk 2	Disk 3	Disk 4	Disk 5
S.M.A.R.T. STATUS	NORMAL	-	-	-	-

9.6.15. *Event*

Alarm Output

Specify the alarm output conditions with the work schedule.


When done, click <APPLY > to apply the changes.

! For more information about the alarm output and N/OFF schedule, refer to "Alarm Out".

ALARM OUTPUT

ALARM OUT		ON/OFF SCHEDULE			
	NAME	TYPE	OPERATION	DURATION	
1	CAM-A01	DIGITAL OUT	N/O	5 SEC	
2	CAM-A02	DIGITAL OUT	N/O	5 SEC	
3	CAM-A03	DIGITAL OUT	N/O	5 SEC	
4	CAM-A04	DIGITAL OUT	N/O	5 SEC	
5	CAM-A05	DIGITAL OUT	N/O	5 SEC	
6	CAM-A06	DIGITAL OUT	N/O	5 SEC	
7	CAM-A07	DIGITAL OUT	N/O	5 SEC	
8	CAM-A08	DIGITAL OUT	N/O	5 SEC	
9	CAM-A09	DIGITAL OUT	N/O	5 SEC	
10	CAM-A010	DIGITAL OUT	N/O	5 SEC	
11	CAM-A011	DIGITAL OUT	N/O	5 SEC	
12	CAM-A012	DIGITAL OUT	N/O	5 SEC	
13	CAM-A013	DIGITAL OUT	N/O	5 SEC	
14	CAM-A014	DIGITAL OUT	N/O	5 SEC	
15	CAM-A015	DIGITAL OUT	N/O	5 SEC	
16	CAM-A016	DIGITAL OUT	N/O	5 SEC	
AO1	AO1	DIGITAL OUT	N/O	5 SEC	

ALARM OUTPUT

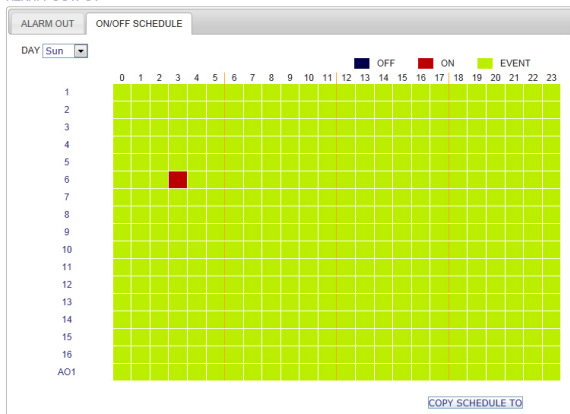

Event Notification

You can set desired event actions triggered by an event, such as <BUZZER OUT>, <DISPLAY >, <EMAIL> and <FTP> notifications.

Set the dwell time for buzzer or pop-up display, or set the email or FTP destination settings and then click <APPLY > to save your changes.

! For more information about the event notification, refer to "Event Notification".

EVENT NOTIFICATION

BUZZER OUT DISPLAY EMAIL FTP

BUZZER OUT

DURATION 5 SEC

EVENT NOTIFICATION

BUZZER OUT DISPLAY EMAIL FTP

VIDEO POPUP

DURATION 5 SEC

OSD POPUP

DURATION 5 SEC

EVENT NOTIFICATION

BUZZER OUT DISPLAY EMAIL FTP

EMAIL NOTIFICATION

ADD NEW EMAIL EDIT

MINIMUM EMAIL FREQUENCY 1 MIN

INCLUDE SNAPSHOT IMAGE

EVENT NOTIFICATION

BUZZER OUT DISPLAY EMAIL FTP

FTP NOTIFICATION

FTP SERVER EDIT

DIRECTORY MANUAL

FILE NAME MANUAL

MINIMUM FREQUENCY 1 MIN

INCLUDE WEBRA LINK

INCLUDE SNAPSHOT IMAGE

HELP

Alarm Sensor

You can configure the settings of the alarm sensor and specify the operation of the sensor if an event occurs. When done, click <APPLY > to apply the changes.

! For more information about each of the alarm sensor actions, refer to "Alarm Sensor".

Motion Sensor

You can set an action to execute when a motion is detected.

When done, click <APPLY > to apply the changes.

For more information about how to set the motion sensor, refer to "Motion Sensor".

Video Loss

You can set to trigger alarm output or other actions when there is no video transfer from a camera.

When done, click <APPLY > to apply the changes.

! For more information about how to set the video loss, refer to "Video Loss".

System Event

You can set event actions for disk, recording, network and system events. As same to setting event actions for normal events, you can set to trigger alarm output, buzzer, display on-screen pop-up, or send event notification via email and FTP.

When done, click <APPLY > to apply the changes.

! For more information about how to set the system event, refer to "System Event".

ALARM SENSOR

CAM	EVENT PARAMETER			LINKED CAMERA	ALARM OUT	PTZ Preset	ACTION				
	NAME	OPERATION	BUZZER				VIDEO POPUP	OSD POPUP	EMAIL	FTP	
1	CAM-A11	N/C	1	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2	CAM-A12	N/C	2	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3	CAM-A13	N/C	3	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4	CAM-A14	N/C	4	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5	CAM-A15	N/C	5	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6	CAM-A16	N/C	6	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7	CAM-A17	N/C	7	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
8	CAM-A18	N/C	8	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
9	CAM-A19	N/C	9	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
10	CAM-A110	N/C	10	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
11	CAM-A111	N/C	11	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
12	CAM-A112	N/C	12	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
13	CAM-A113	N/C	13	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
14	CAM-A114	N/C	14	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
15	CAM-A115	N/C	15	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
16	CAM-A116	N/C	16	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
AI 1	AI1	N/C	1, 2, 3, 4	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
AI 2	AI2	N/C	5, 6, 7, 8	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

MOTION SENSOR

CAM	EVENT PARAMETER		ALARM OUT	ACTION				
	IGNORING INTERVAL			PTZ Preset	BUZZER	VIDEO POPUP	EMAIL	FTP
1	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16	5 SEC		N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

VIDEO LOSS

CAM	ALARM OUT	ACTION			
		PRESET	BUZZER	EMAIL	FTP
1	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16	N/A	000000	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

SYSTEM EVENT STATUS

DISK						
RECORD		SYSTEM		NETWORK		
EVENT TYPE		ALARM OUT	ACTION			
			BUZZER	OSD POPUP	EMAIL	FTP
OVERWRITE START EVENT		N/A	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DISK FULL EVENT		N/A	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DISK SPACE EXHAUSTED EVENT		90%	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
S.M.A.R.T. EVENT		N/A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
NO DISK EVENT		N/A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

SYSTEM EVENT STATUS

DISK					
RECORD					
SYSTEM					
NETWORK					
EVENT TYPE		ACTION			
		ALARM OUT	BUZZER	EMAIL	FTP
PANIC RECORD START EVENT		N/A	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

SYSTEM EVENT STATUS

DISK

RECORD

SYSTEM

NETWORK

EVENT TYPE		ALARM OUT	ACTION			
			BUZZER	OSD POPUP	EMAIL	FTP
BOOTING EVENT		N/A	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
LOGIN FAIL EVENT		RETRY 3 TIMES	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
FAN FAIL EVENT		N/A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
TEMPERATURE FAIL EVENT		N/A	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
POE FAIL EVENT		90%	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

9.6.16. *Record Setup*


Record Setting

You can set the recording options for Auto or Manual mode.

When done, click <APPLY> to apply the changes.
! For more information about how to set each mode,
refer to "Operation Mode".

Continuous Recording

You can configure the settings of: continuous recording time, recording size, frame rate per second and quality.

Click  next to each item to display the list of values available.

When you complete the recording size and schedule settings, click <APPLY> to apply your settings.
! For more information about the continuous recording size and schedule, refer to "Continuous Recording".

SYSTEM EVENT STATUS						
DISK	RECORD	SYSTEM	NETWORK			
EVENT TYPE			ACTION			
TROUBLE IN INTERNET CONNECTION			N/A	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
FAIL IN REMOTE LOGIN			RETRY 3 TIMES	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
FAIL IN DDNS UPDATE			RETRY 3 TIMES	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

RECORDING CONFIGURATION MODE
MODE MANUAL CONFIGURAT ▼

MANUAL CONFIGURATION OPTIONS	
SCHEDULE MODE	WEEKLY
PRE EVENT RECORDING TIME	5 SEC
POST EVENT RECORDING TIME	30 SEC

PANIC RECORDING OPTIONS

PANIC RECORDING TIME MANUAL

RECORDING CONFIGURATION MODE

AUTOMATIC RECORD CONFIGURATION MODE

☒ CONTINUOUS RECORD LONG DURATION BUT LOW QUALITY

☐ MOTION RECORD

☐ ALARM RECORD

☐ MOTION/ALARM RECORD

☐ INTENSIVE MOTION RECORD

☐ INTENSIVE ALARM RECORD

☐ INTENSIVE MOTION/ALARM RECORD

PANIC RECORDING TIME **MANUAL**

CONTINUOUS REC

SIZE/FPS/QUALITY

SCHEDULE

Sun

0

6

12

18

24

TIME	RESOLUTION	FPS	QUALITY	AUDIO
CAM1	1920x1080	30	HIGHEST	OFF
CAM2	1920x1080	30	HIGHEST	OFF
CAM3	1920x1080	30	HIGHEST	OFF
CAM4	1920x1080	30	HIGHEST	OFF
CAM5	1920x1080	30	HIGHEST	OFF
CAM6	1920x1080	30	HIGHEST	OFF
CAM7	1920x1080	30	HIGHEST	OFF
CAM8	1920x1080	30	HIGHEST	OFF
CAM9	1920x1080	30	HIGHEST	OFF
CAM10	1920x1080	30	HIGHEST	OFF
CAM11	1920x1080	30	HIGHEST	OFF
CAM12	1920x1080	30	HIGHEST	OFF
CAM13	1920x1080	30	HIGHEST	OFF
CAM14	1920x1080	30	HIGHEST	OFF
CAM15	1920x1080	30	HIGHEST	OFF
CAM16	1920x1080	30	HIGHEST	OFF

HELP

CONTINUOUS REC

SIZE/FPS/QUALITY SCHEDULE

Sun

TIME

0 6 12 18 24

OFF ON

CAM1

CAM2

CAM3

CAM4

CAM5

CAM6

CAM7

CAM8

CAM9

CAM10

CAM11

CAM12

CAM13


CAM14

CAM15

CAM16

Motion Recording

Set the <SIZE/FPS/QUALITY/AUDIO> and the <SCHEDULE> to apply if a motion event occurs.

Click  next to each item to display the list of values available.

Complete setting the <SIZE/FPS/QUALITY/AUDIO> for the motion recording as well as the <SCHEDULE>, and click <APPLY> to apply the changes.

! For more information about the motion recording size and schedule, refer to "Motion Recording".

MOTION REC

SIZE/FPS/QUALITY SCHEDULE

Sun ▾

TIME	0				6				12				18				24			
	RESOLUTION				FPS				QUALITY				AUDIO							
CAM1	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM2	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM3	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM4	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM5	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM6	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM7	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM8	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM9	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM10	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM11	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM12	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM13	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM14	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM15	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												
CAM16	1920x1080	▾	30	▾	HIGHEST	▾	OFF	▾												

HELP

MOTION REC

SIZE/FPS/QUALITY SCHEDULE

Sun ▾

TIME


0 6 12 18 24

OFF ON

Camera	0-6h	6-12h	12-18h	18-24h
CAM1	ON	OFF	OFF	OFF
CAM2	ON	OFF	OFF	OFF
CAM3	ON	OFF	OFF	OFF
CAM4	ON	OFF	OFF	OFF
CAM5	ON	OFF	OFF	OFF
CAM6	ON	OFF	OFF	OFF
CAM7	ON	OFF	OFF	OFF
CAM8	ON	OFF	OFF	OFF
CAM9	ON	OFF	OFF	OFF
CAM10	ON	OFF	OFF	OFF
CAM11	ON	OFF	OFF	OFF
CAM12	ON	OFF	OFF	OFF
CAM13	ON	OFF	OFF	OFF
CAM14	ON	OFF	OFF	OFF
CAM15	ON	OFF	OFF	OFF
CAM16	ON	OFF	OFF	OFF

Alarm Recording

Set the <SIZE/FPS/QUALITY/AUDIO> and the <SCHEDULE> to apply if an alarm event occurs.

Click  next to each item to display the list of values available.

ALARM REC

SIZE/FPS/QUALITY

SCHEDULE

SUN

06121824

TIME

	RESOLUTION	FPS	QUALITY	AUDIO
CAM1	1920x1080	30	HIGHEST	OFF
CAM2	1920x1080	30	HIGHEST	OFF
CAM3	1920x1080	30	HIGHEST	OFF
CAM4	1920x1080	30	HIGHEST	OFF
CAM5	1920x1080	30	HIGHEST	OFF
CAM6	1920x1080	30	HIGHEST	OFF
CAM7	1920x1080	30	HIGHEST	OFF
CAM8	1920x1080	30	HIGHEST	OFF
CAM9	1920x1080	30	HIGHEST	OFF
CAM10	1920x1080	30	HIGHEST	OFF
CAM11	1920x1080	30	HIGHEST	OFF
CAM12	1920x1080	30	HIGHEST	OFF
CAM13	1920x1080	30	HIGHEST	OFF
CAM14	1920x1080	30	HIGHEST	OFF
CAM15	1920x1080	30	HIGHEST	OFF
CAM16	1920x1080	30	HIGHEST	OFF

HELP

Complete setting the <SIZE/FPS/QUALITY/AUDIO> for the alarm recording as well as the <SCHEDULE>, and click <APPLY> to apply the changes.

! For more information about the alarm recording size and schedule, refer to "Alarm Recording".

ALARM REC

SIZE/FPS/QUALITY SCHEDULE

Sun

0 6 12 18 24

TIME

OFF ON

CAM1
CAM2
CAM3
CAM4
CAM5
CAM6
CAM7
CAM8
CAM9
CAM10
CAM11
CAM12
CAM13
CAM14
CAM15
CAM16

Panic Recording

From the <PANIC RECORD> menu, you can set the resolution, FPS, quality and audio settings to your preference.

Click <▼> next to each item to display the list of values available.

When you have completed the manual record settings, click <APPLY> to apply the changes.

! For more information about the manual record settings, refer to "Panic Recording".

PANIC REC

	RESOLUTION	FPS	QUALITY	AUDIO
CAM1	1920x1080	30	HIGHEST	OFF
CAM2	1920x1080	30	HIGHEST	OFF
CAM3	1920x1080	30	HIGHEST	OFF
CAM4	1920x1080	30	HIGHEST	OFF
CAM5	1920x1080	30	HIGHEST	OFF
CAM6	1920x1080	30	HIGHEST	OFF
CAM7	1920x1080	30	HIGHEST	OFF
CAM8	1920x1080	30	HIGHEST	OFF
CAM9	1920x1080	30	HIGHEST	OFF
CAM10	1920x1080	30	HIGHEST	OFF
CAM11	1920x1080	30	HIGHEST	OFF
CAM12	1920x1080	30	HIGHEST	OFF
CAM13	1920x1080	30	HIGHEST	OFF
CAM14	1920x1080	30	HIGHEST	OFF
CAM15	1920x1080	30	HIGHEST	OFF
CAM16	1920x1080	30	HIGHEST	OFF

Network Streaming

You can specify the maximum size of network streaming and video resolution for remote users and change the FPS.

Click <▼> next to each item to display the list of values available.

When done, click <APPLY> to apply the settings.

NETWORK STREAMING

	MAX RESOLUTION	MAX FPS
CAM1	640x352	30
CAM2	640x352	30
CAM3	640x352	30
CAM4	640x352	30
CAM5	640x352	30
CAM6	640x352	30
CAM7	640x352	30
CAM8	640x352	30
CAM9	640x352	30
CAM10	640x352	30
CAM11	640x352	30
CAM12	640x352	30
CAM13	640x352	30
CAM14	640x352	30
CAM15	640x352	30
CAM16	640x352	30

☒ ENABLE ADAPTIVE STREAMING CONTROL FOR REMOTE CLIENTS.

HELP

About

Click the <INFORMATION> tab to check the model name of the NVR as well as the web viewer version.

Web Viewer Information

NVR Model : 16CH / 480FPS

WEB Version : WEB_v2.3.1_1.2.7.0_130114

10.Mobile Viewer

10.1. nviewer

You can use the smart viewer to monitor the network on a remote site and play the monitoring video anytime anywhere.

10.1.1. nviewer specification

Minimum/ recommended specification

OS	Minimum specification	Recommended specification
Android Phone	Processor :800 MHz or higher Flash : 512 MB or higher RAM : 512 MB or higher SD Card : 4 GB or higher OS : 2.0 or higher	Processor : 1 GHz or higher Flash : 512 MB RAM : 512 MB SD Card : 16 GB or higher OS : 2.1 or higher
iPhone	iPhone 3G, iPod touch 3rd Generation iPhone OS 3.1.3 or higher	iPhone 3GS or higher iPhone OS 3.2 or higher

10.1.2. Using the nviewer on iPhone

how to download the iPhone-dedicated application


From your iPhone, access the App Store.

Enter "nViewer" in the search bar to find it before downloading. Install the application on your iPhone.

! The nViewer supports the 1/4 split screen mode.


!With the nViewer Lite, you cannot: check the log, control the PTZ operations or change the system settings.

10.1.3. To connect to NVR with nviewer

1. Select and run the nViewer.
2. Click  in the top right corner of the NVR List to select and add a site to the list.




3. Enter the server name and click <Save>.

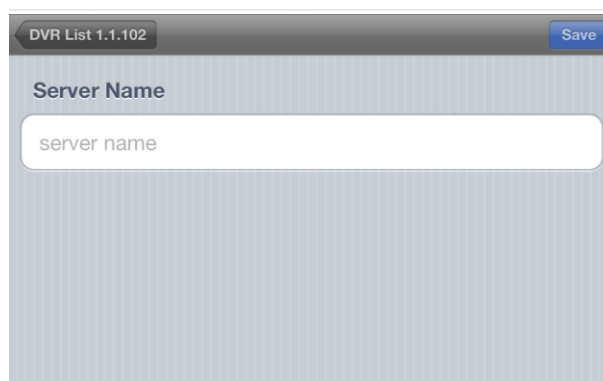

4. Provide the IP address, HTTP port number and RTSP port number, and click <Save>.


5. Provide the access ID of the NVR as well as the password.
6. Specify the use of the Auto Login.
7. Click <Save>.

8. Select the site that you added in the NVR List.

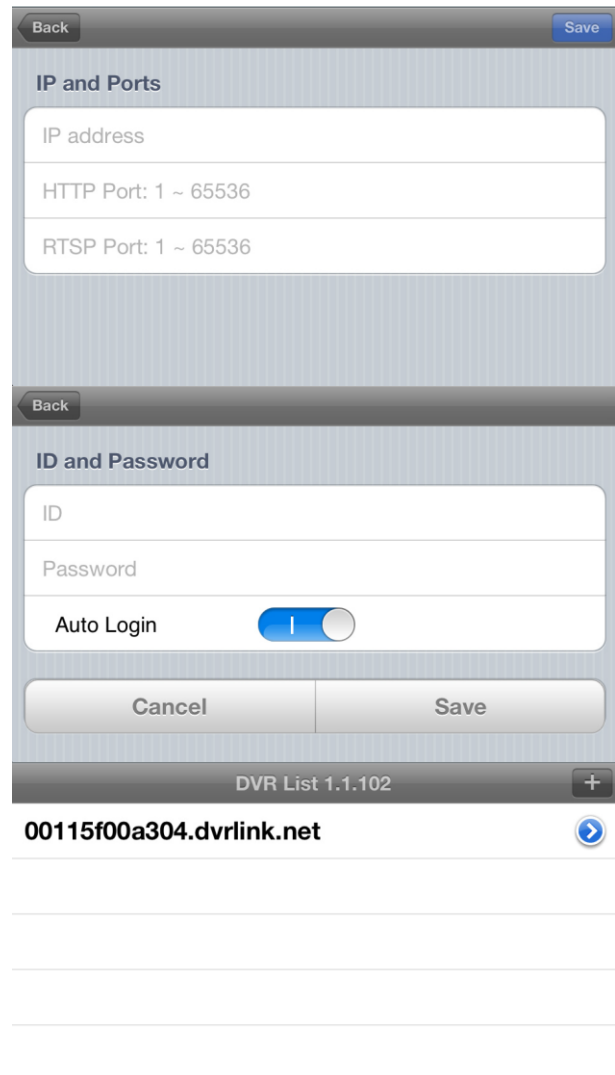




The screenshot shows two screens from the ORION NVR configuration interface. The top screen is titled 'IP and Ports' and has a 'Back' button on the left and a 'Save' button on the right. It contains three input fields: 'IP address', 'HTTP Port: 1 ~ 65536', and 'RTSP Port: 1 ~ 65536'. The bottom screen is titled 'ID and Password' and also has a 'Back' button on the left and 'Cancel' and 'Save' buttons at the bottom. It contains two input fields: 'ID' and 'Password', and an 'Auto Login' toggle switch which is currently turned on. Below these screens is a 'DVR List 1.1.102' section with a '+' icon on the right. The first entry in the list is '00115f00a304.dvrlink.net' with a blue arrow icon to its right. Below this list are several empty rows.

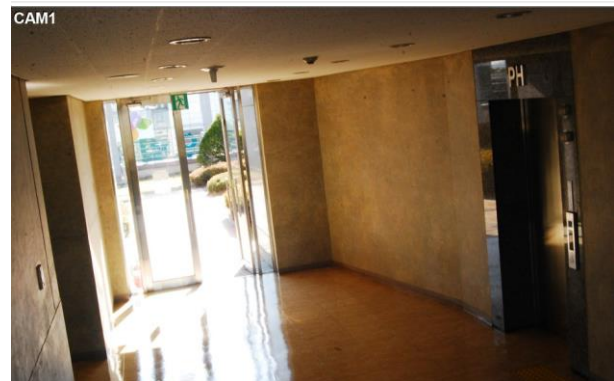9. Try to access the NVR.
If connected successfully, you will see the screen as shown






Split Mode

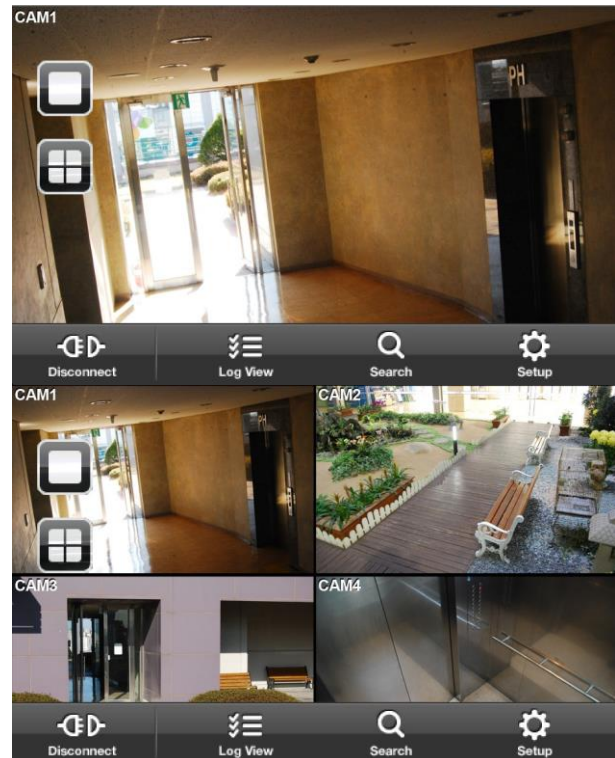1. Click any area on the screen.
The main menu appears at the bottom of the screen.
2. Click  in the top left corner to switch to 1-split mode; click  to switch to 4-split mode.
! Use the mouse to scroll the screen to the left or right to move to the next camera video screen.






Using the log view

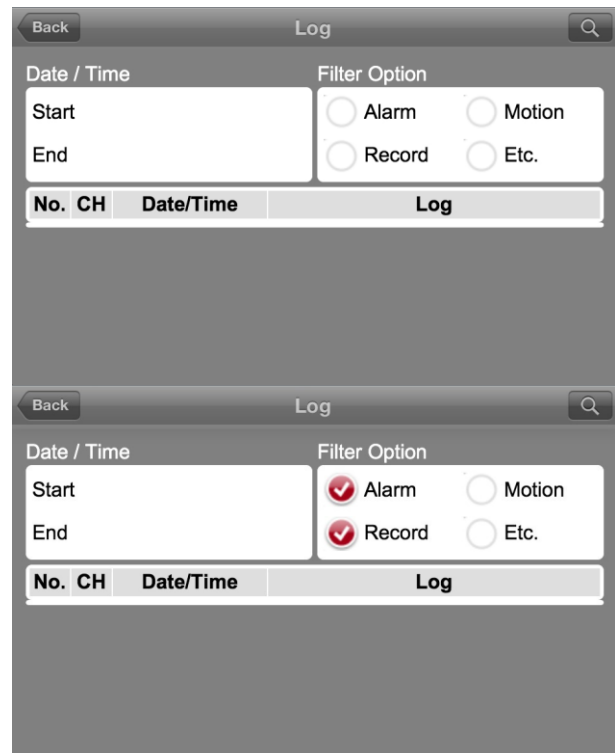1. From the main menu, click .
You can check the log of the data stored
2. Select one from Alarm, Motion, Record, Etc. and click .
You will view the log of related items.




Using the Search function

1. From the main menu, click <  >.
You can view the history of the data stored.
2. Select a desired time and date.
You can use the vertical time bar to specify the start time.
3. Click <  > to play the video recorded at the specified time.
4. Click any area to display the play bar with which you can control the playing direction and speed of the video.

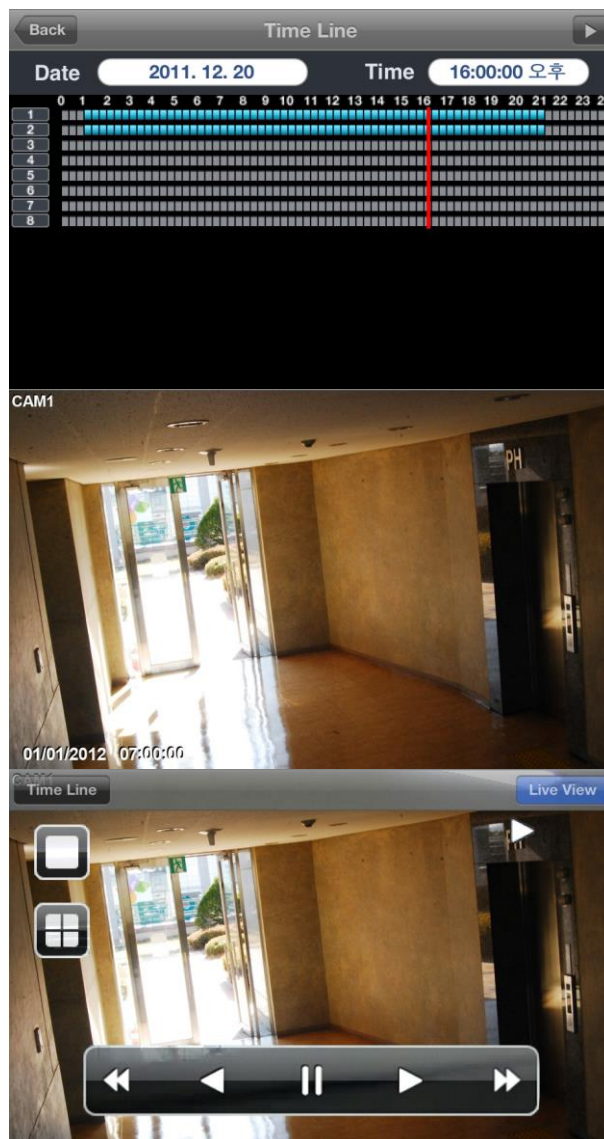

Using the Setup function

From the main menu, click <  >.
You will be connected to the web viewer site.
! For details about each displayed item, refer to "Setup".



10.1.4. Using nviewer with android

How to download the android-dedicated application

From your smart phone, access the Play Store.

Enter "nViewer" in the search bar to find it before downloading. Install the application on your Smart Phone.

! The nViewer supports the 1/4 split screen mode.

! With the nViewer Lite, you cannot: check the log, control the PTZ operations or change the system settings.

10.1.5. ***To connect to NVR with nviewer***

1. Select and run the nViewer.
2. Use the Add button to select and add a site to the list.
3. Please enter a Name.
4. Provide the IP address, HTTP port number and RTSP port number, and click <Save>.
5. Provide the access ID of the NVR as well as the password.
6. Select whether or not to save the ID and PW.
7. Click <Save>.

nViewer Lite 1.0.7

Add a DVR connection by using 'Menu > Add Connection'

+

Add Connection

nViewer Lite 1.0.7

Add Connection

Name

URL

HTTP Port

RTSP Port

ID


Password

☒ Save ID

☒ Save Password

Save Cancel

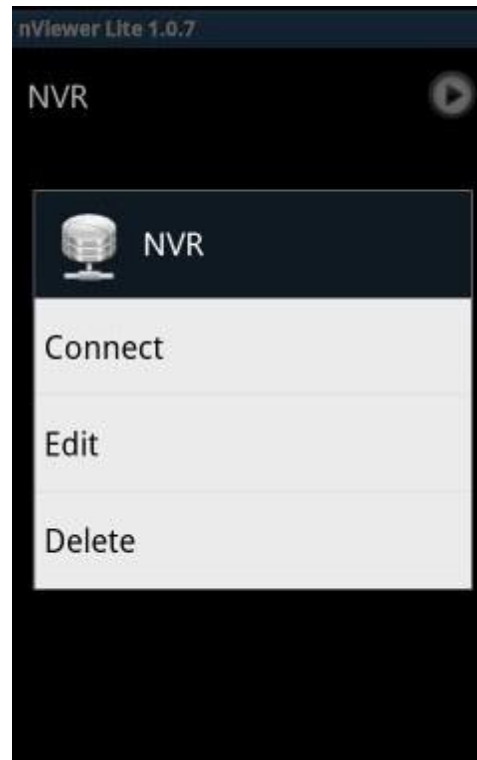

8. Select the site that you added in the NVR List.
Press and hold the mouse button to display the pop-up window.




9. Select <connect> and try to access.
If connected successfully, you will see the screen as
10. shown.






Split Mode

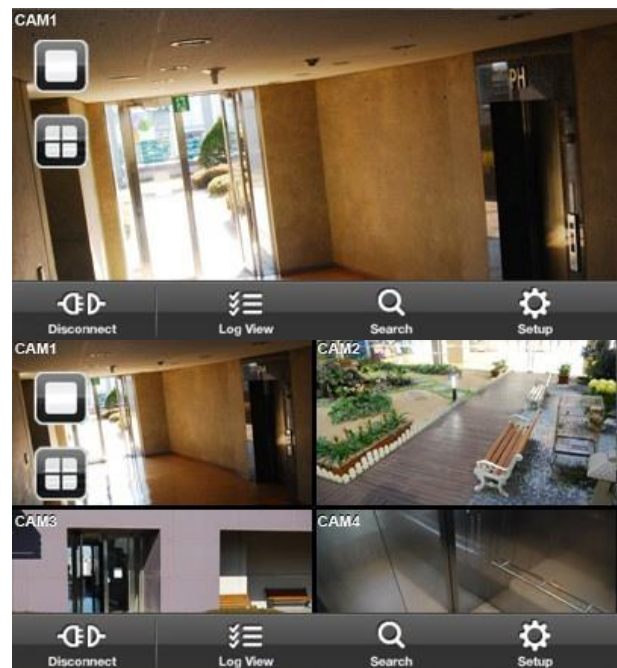1. Click any area on the screen.
The main menu appears at the bottom of the screen.
2. Click <  > in the top left corner to switch to 1-split mode; click <  > to switch to 4-split mode.
! Use the mouse to scroll the screen to the left or right to move to the next camera video screen






Using the log view

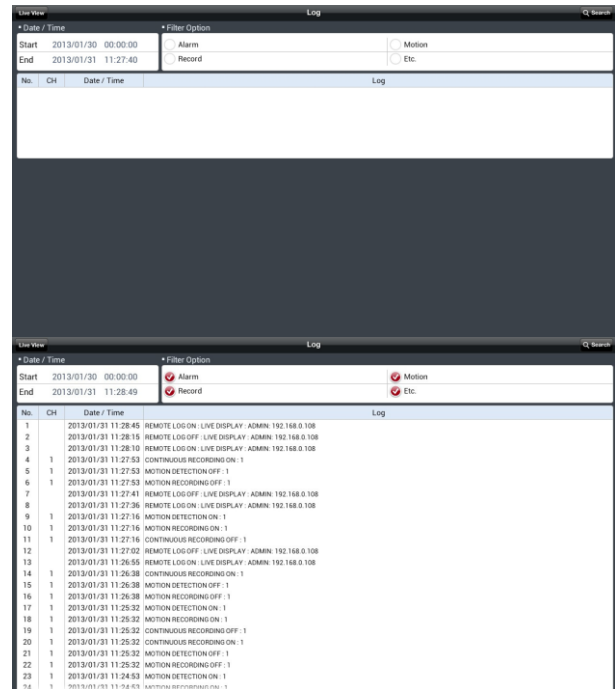- From the main menu, click .
You can check the log of the data stored
- Select one from Alarm, Motion, Record, Etc. and click .
You will view the log of related items.



Using the Search function

- From the main menu, click .
You can view the video of the recording data.
- Select a desired time and date.
You can use the vertical time bar to specify the start time.
- Click  to play the video recorded at the specified time.
- Click any area to display the play bar with which you can control the playing direction and speed of the video.

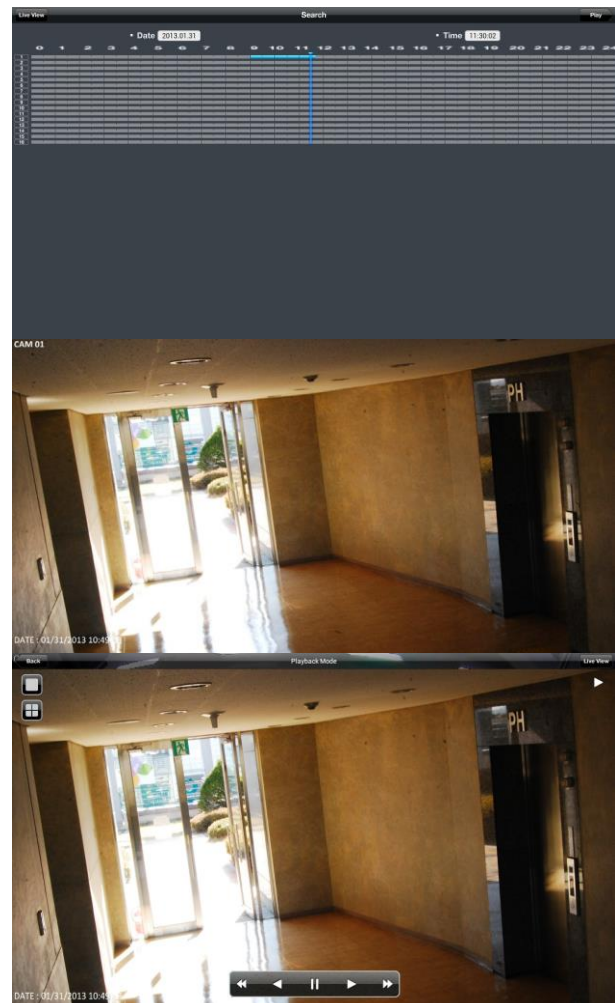


Using the Setup function

From the main menu, click < >.

You will be connected to the web viewer site.

v For details about each displayed item, refer to "Setup".

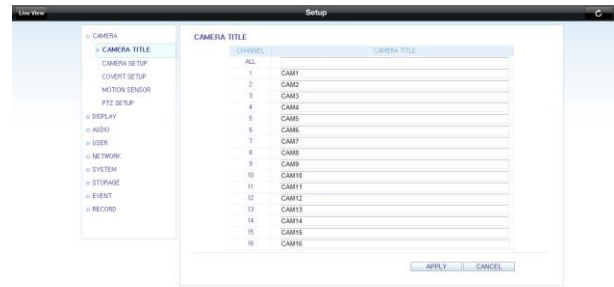


11. Archive Viewer

You can play the data archived in the NVR.

You can play the HDD data recorded by the NVR.


11.1. Getting started with the backup Player

1. Connect the NVR to the backup USB storage device.
2. Open the folder saving the archived images


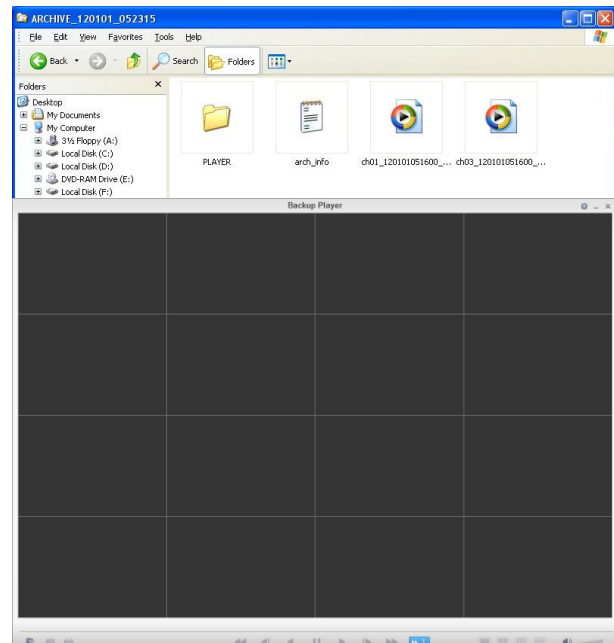


3. Run the Backup Player.

4. Click < > in the bottom left corner to display the file browser. Select the archived file to play

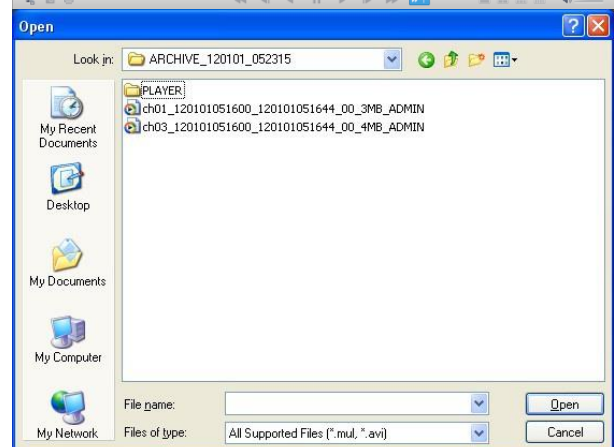

5. Check the integrity of the archived file.

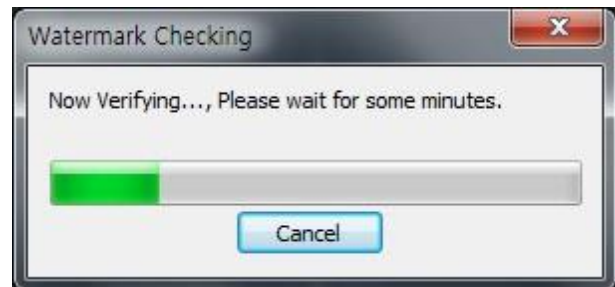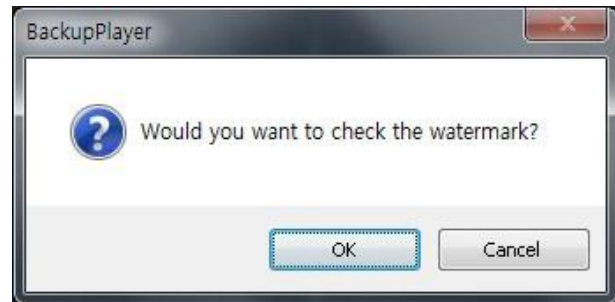

6. When done, the archived file will be played on the screen.




11.2. Backup Player at a glance



No.	Item	Description
a	Setup	Configure the environment settings.
	Minimize, Full Screen	You can minimize the Backup Player or expand it to the full screen.
	Close	Close the Backup Player.
b	Channel Information	Show the channel information and the video resolution.
c	Play Time	Display the time of the current video image.
d	Play Time	Display the current playback time.
e	File Search	Open the file that you backed up.
	Capture	Capture the current screen.
	Print	Print out the current screen.
f	Playback Control	Control the playback direction and speed of the current video. For more information about how to use the playback control buttons, refer to "Using the play bar".
g	Split Mode	Switch to 1-/4-/8-/16-split screen mode
h	Audio Setting	Show the sound signal status and volume level.
i	Play Bar	Display the current playback position in the video.


Video capture

Click  to capture the current video image.


- > Selected Video : Capture the actual frame of the current video.
- > Screen : Capture the visible portion of the current video.
- > Format : Select a saving format. (BMP, JPG, PNG)
- > Path : Specify the saving path.




Print out

Click  Button to print out the image.

When the "Print" window appears, check the preview and click <Print>.

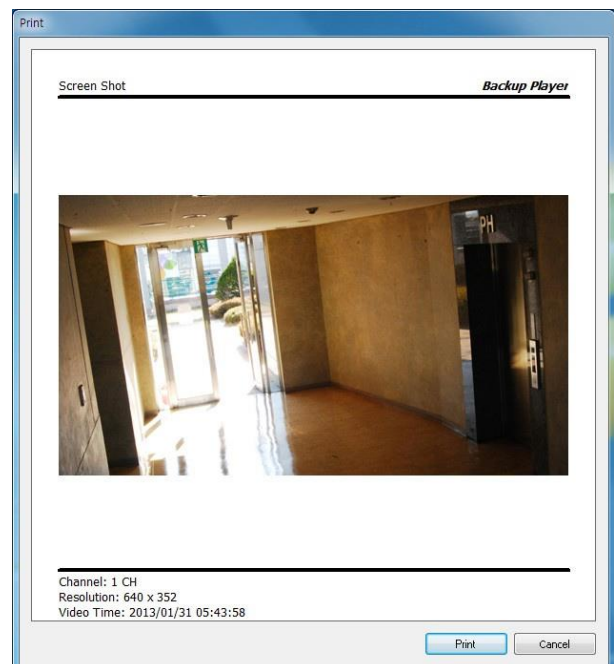


Settings

Click <  > to configure the Backup Player settings.
You can check the version of the Backup Player.

- > Maintain image aspect ratio : Preserve the aspect ratio of the image.
If you do not mark this option, the image will be adjusted to fit the screen.
- > I-frame play. : Plays i-frames (key frames) of the video.

- > About : You can check the program information including the current version.

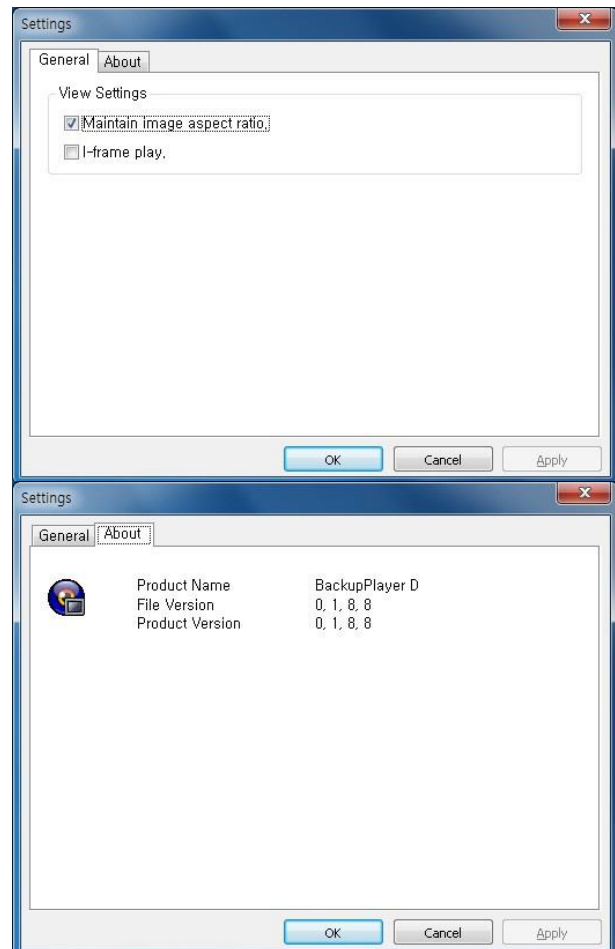

12. Appendix

12.1. Specification

Item	Details		Remarks
	8 CH	4 CH	
VIDEO			
INPUT VIDEO	8 x IP Camera (Max HD1080p)	4 x IP Camera (Max HD1080p)	
# OF CHANNELS	8 CH	4 CH	
MAIN MONITOR	HD Display	HD Display	
MAIN MONITOR RESOLUTION	1080p/60Hz	1080p/60Hz	
MOTION DETECTION	Yes (From IP Camera)	Yes (From IP Camera)	Depend on IP Camera
AUDIO			
INPUT AUDIO	8 CH (IP) + 1 CH (Internal)	4 CH (IP) + 1 CH (Internal)	Depend on IP Camera
OUTPUT AUDIO	8 CH (IP) + 1 CH (Internal)	4 CH (IP) + 1 CH (Internal)	Depend on IP Camera
CODEC	G.711	G.711	
RECORDING			
CODEC	H.264 (BP, MP, HP)	H.264 (BP, MP, HP)	
REC.RATE	MAX. 30 FPS@1080p/CH	MAX. 30 FPS@1080p/CH	Depend on IP Camera
REC.RESOLUTION	HD 1080p or HD 720p, 640x360	HD 1080p or HD 720p, 640x360	Depend on IP Camera
ALRM I/O			
ALARM INPUT	8 CH (IP) + 2 CH (Internal)	4 CH (IP) + 2 CH (Internal)	Depend on IP Camera
ALARM OUTPUT	8 CH (IP)+ 1 RELAY (Internal)	4 CH (IP)+ 1 RELAY (Internal)	Depend on IP Camera
STORAGE			
INTERNAL HDD (SATA)	2EA		
INTERFACES			
USB(USB2.0)	2 ports	2 ports	
RS-485	1	1	
RS-232	1	1	
LAN	8 (IPCamera, PoE) + 1 (LAN) + 1 (WAN)	4 (IPCamera, PoE) + 1 (LAN) + 1 (WAN)	
REMOTE CONTROL	YES	YES	
ETC			
WATCHDOG	YES	YES	
COOLINGFAN	2EA	2EA	
POWER			
POWER SUPPLY	12V adaptor (for System) + 48V adaptor (for PoE/Camera)	12V adaptor (for System) + 48V adaptor (for PoE/Camera)	
POWER CONSUMPTION	20W max. without HDD	20W max. without HDD	
ENVIRONMENT			

HUMIDITY	10~90% NC	10~90% NC	
TEMPERATURE	0°C ~ 40°C (32°F~104°F)	0°C ~ 40°C (32°F~104°F)	
CHASSIS			
DIMENSION	305 x 298 x 44mm	305 x 298 x 44mm	
WEIGHT			
CERTIFICATION			
	FCC, CE, KC	FCC, CE, KC	

12.2. Compatible hdd Specifications

Maximum SATA Speed	~ SATA1(1.5G) : Can be used ~ SATA2(3.0G) : Can be used ~ SATA3(6.0G) : Devices of backward compatibility to SATA2 (3.0G) can be used.
Maximum Start-up Current	12V, 2A (or lower)
Maximum Average Operation Power Consumption	7W (or lower)
Maximum R/W Latency	Latency (Read: 13ms / Write: 13ms) or smaller

! Use 3.5" HDD disks.

! Using HDD devices other than recommended specifications may cause serious problem.

! For further information of HDD specifications, refer to the applicable data sheet of the HDD manufacturer.

12.3. Troubleshooting (FaQ)

Problem	Action
The system does not operate at all with no active LED in the front panel.	<ul style="list-style-type: none"> ~ Make sure that the rear switch is turned on ~ Make sure that the system gets supplied with power properly. ~ Check the input voltage.
The unit continuously reboots.	<ul style="list-style-type: none"> ~ Check if the system fan in a side panel of the unit or the CPU fan inside the unit works properly. If it fails, contact the retailer or the service center. ~ Disconnect the HDD cable and try to boot the system again. If the system reboots successfully, install a new HDD and check if the system make recording normally.
The front LED is lit, but nothing is displayed on the screen yet.	<ul style="list-style-type: none"> ~ Check if your monitor supports the 1080p 60Hz HDMI input. ~ Make sure that the monitor input source is set to HDMI. ~ If using the HDMI-to-DVI cable for the connection, ensure that the input source is set to DVI. ~ Make sure that the system gets supplied with power properly. ~ Check the input voltage.
The sides of the video image are displayed incomplete.	<ul style="list-style-type: none"> ~ If the monitor is over-scanning the video, the sides can be hidden. If this is the case, switch the display mode of the monitor to the 1:1 pixel matching mode. Then, you will view the video in full screen. ~ The 1:1 pixel matching is referred to differently depending on the monitor manufacturer (for example, "JUST SCAN" for Samsung, "ZERO OVERSCAN" for LG). For details, refer to the user manual of the monitor.
The camera is connected but no image is displayed.	<ul style="list-style-type: none"> ~ Make sure that the IP camera is compatible with the NVR. For the compatibility of the IP cameras, contact the retailer. ~ Ensure that a 48V PoE adaptor is connected to the rear of the unit. ~ Check if the camera supports PoE. If your camera is not compatible with the PoE protocols, use a separate power source for the camera. ~ Check if the total power consumption of the cameras exceeds the rated capacity of the 48V PoE adaptor. If the total exceeds the rated capacity, the unit may not play the video or it may fail to operate. If this is the case, use a separate power source for the camera.
It fails to connect to the web or mobile application.	<ul style="list-style-type: none"> ~ Check if the network cable is properly connected to the WAN(UP Link) port of the unit. ~ You must have set the port forwarding if using a router. ~ If you cannot get access with the DDNS address, use the IP address of the NVR instead. If the NVR is connected to the router, use the IP address of the NVR. You can check the IP address of the router in <NETWORK STATUS> - <EXTERNAL IP ADDRESS>.
I can access the web or mobile application but still no video image is displayed.	<ul style="list-style-type: none"> ~ You must have set the port forwarding if using a router. ~ This may happen when the communications provider or network administrator has blocked the service port of the NVR. Change the RTSP port and HTTP port numbers to different ones and set the port forwarding again. ~ Try to access the web or mobile application using the new port numbers.